
How a parsed document becomes searchable pieces


A parsed document is split by heading section, packed into token-budgeted pieces with overlap, enriched with reconstructed headings, and given stable identifiers.

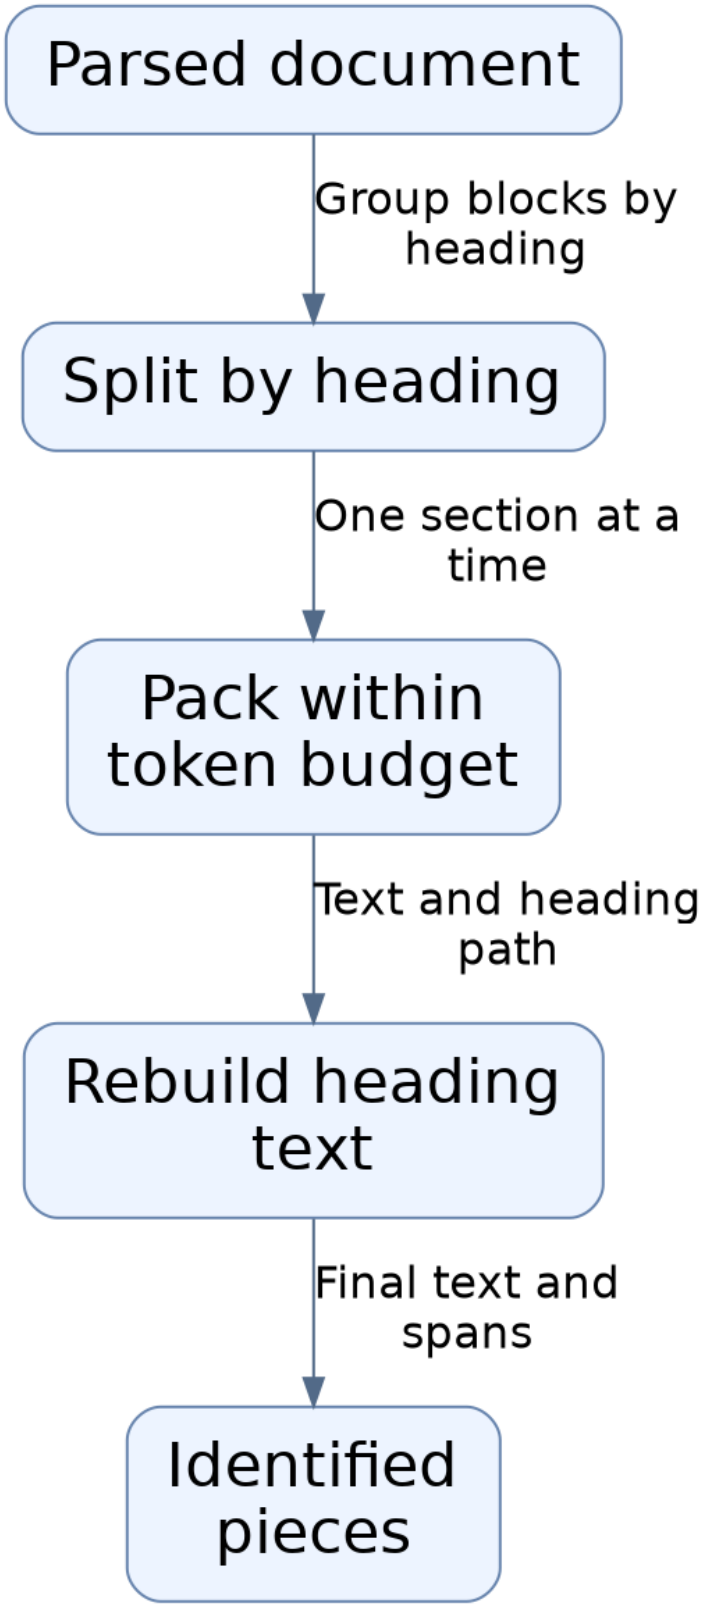

Read from top to bottom. Arrows show the direction of the interaction.

How oversized blocks are split


Blocks accumulate while they fit the token budget; a block that will not fit is split at the longest fitting prefix, and leftover text carries into the next piece.

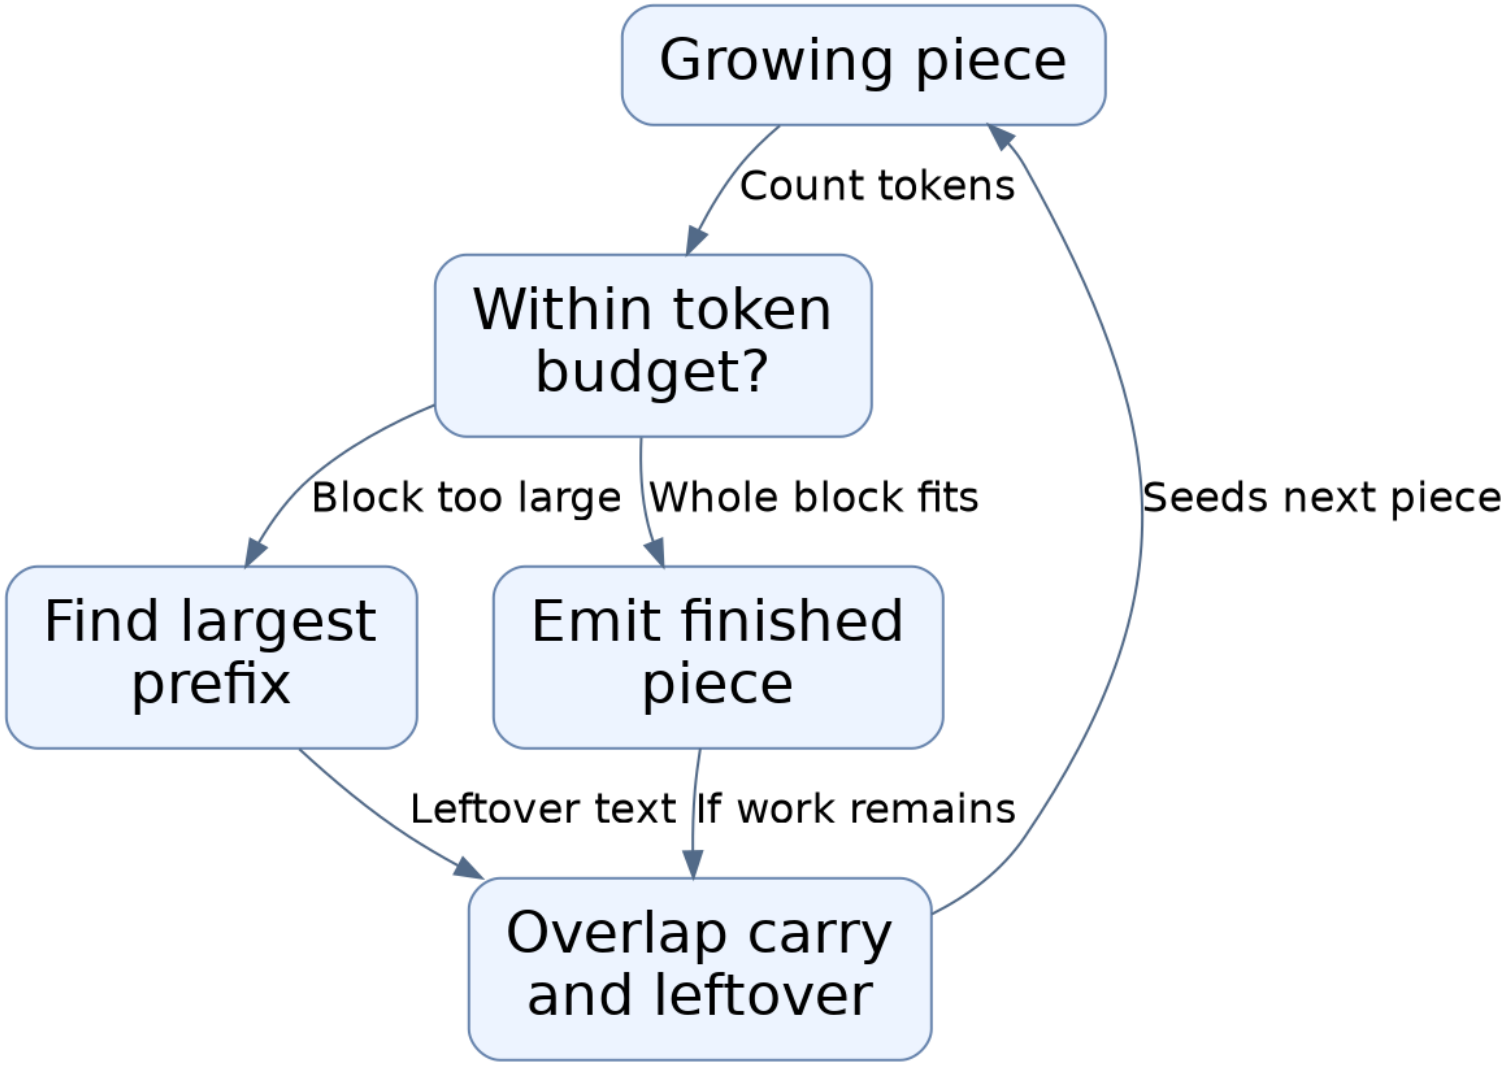

Read from top to bottom. Arrows show the direction of the interaction.

What stops the process


A piece must always hold its heading plus at least one source token; if that cannot fit the configured budget, chunking stops with an error instead of producing an invalid piece.

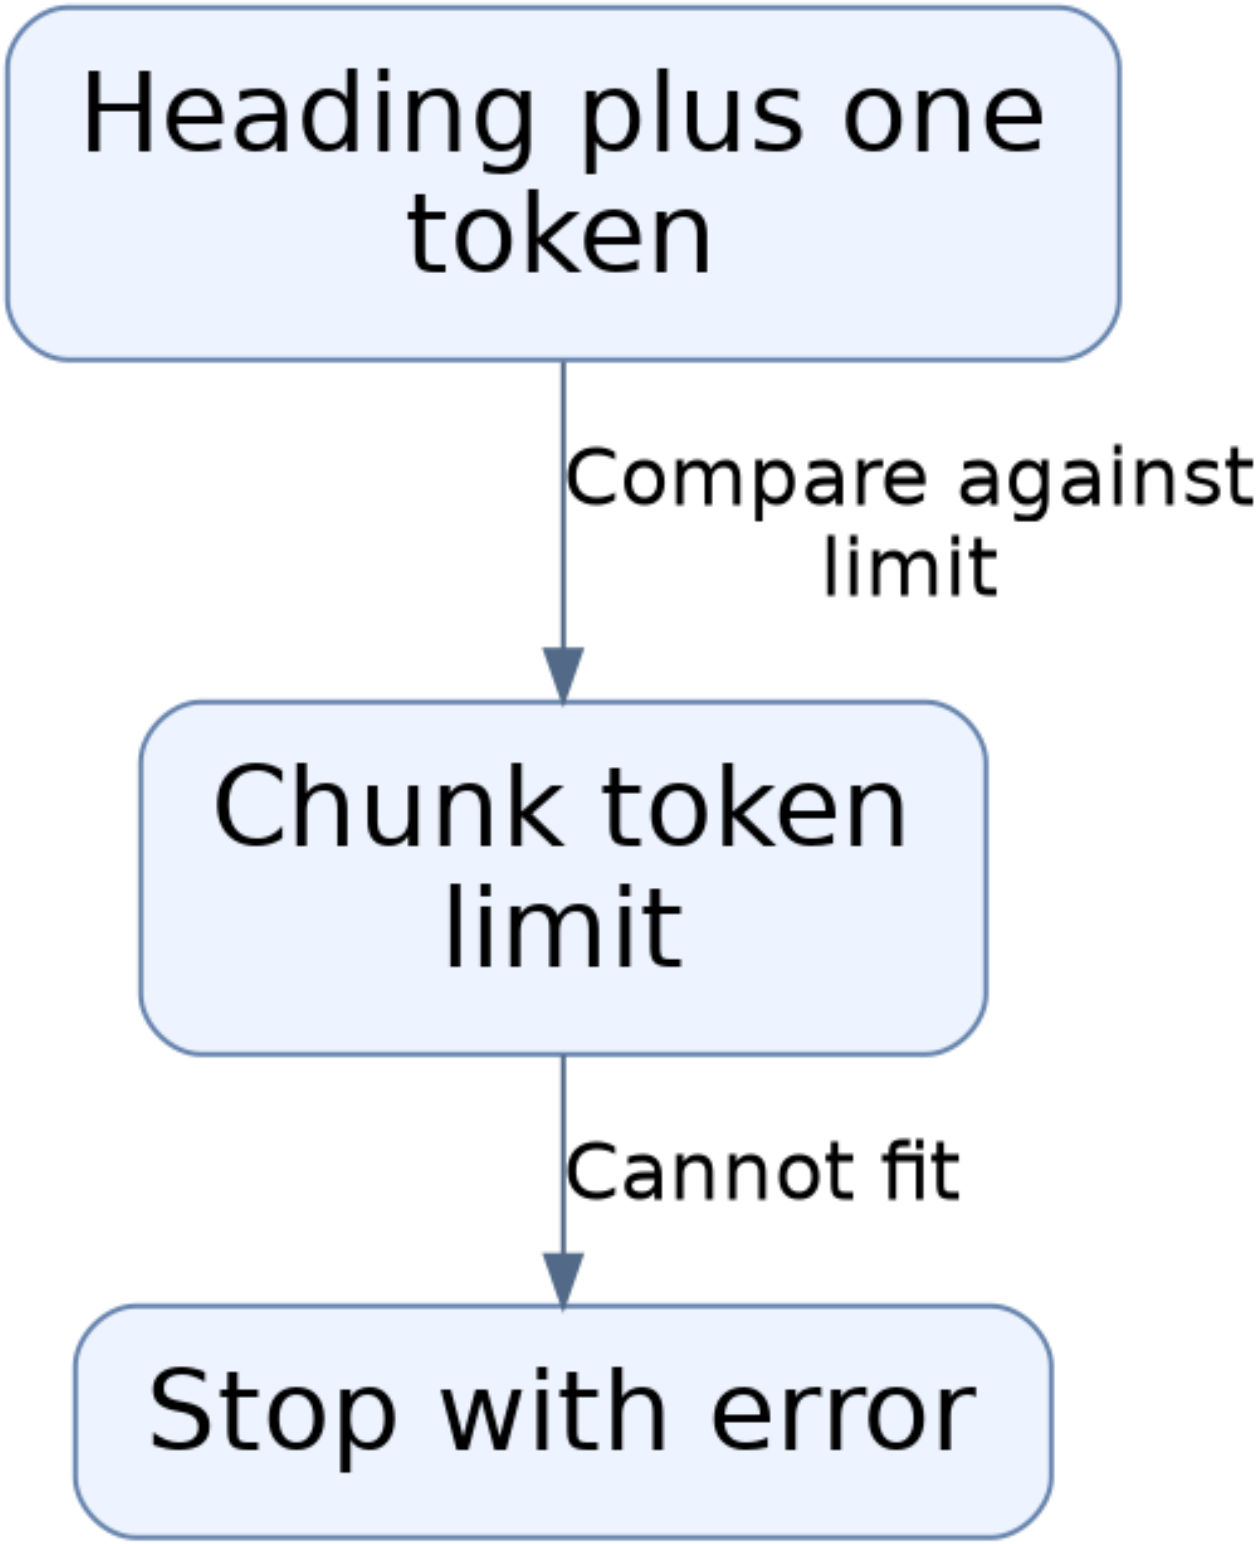

Read from top to bottom. Arrows show the direction of the interaction.

Where stable identifiers come from

Settings are validated and turned into a version digest; that version, the document identifier, position, and content are hashed together so identical input always yields the same piece identifier.

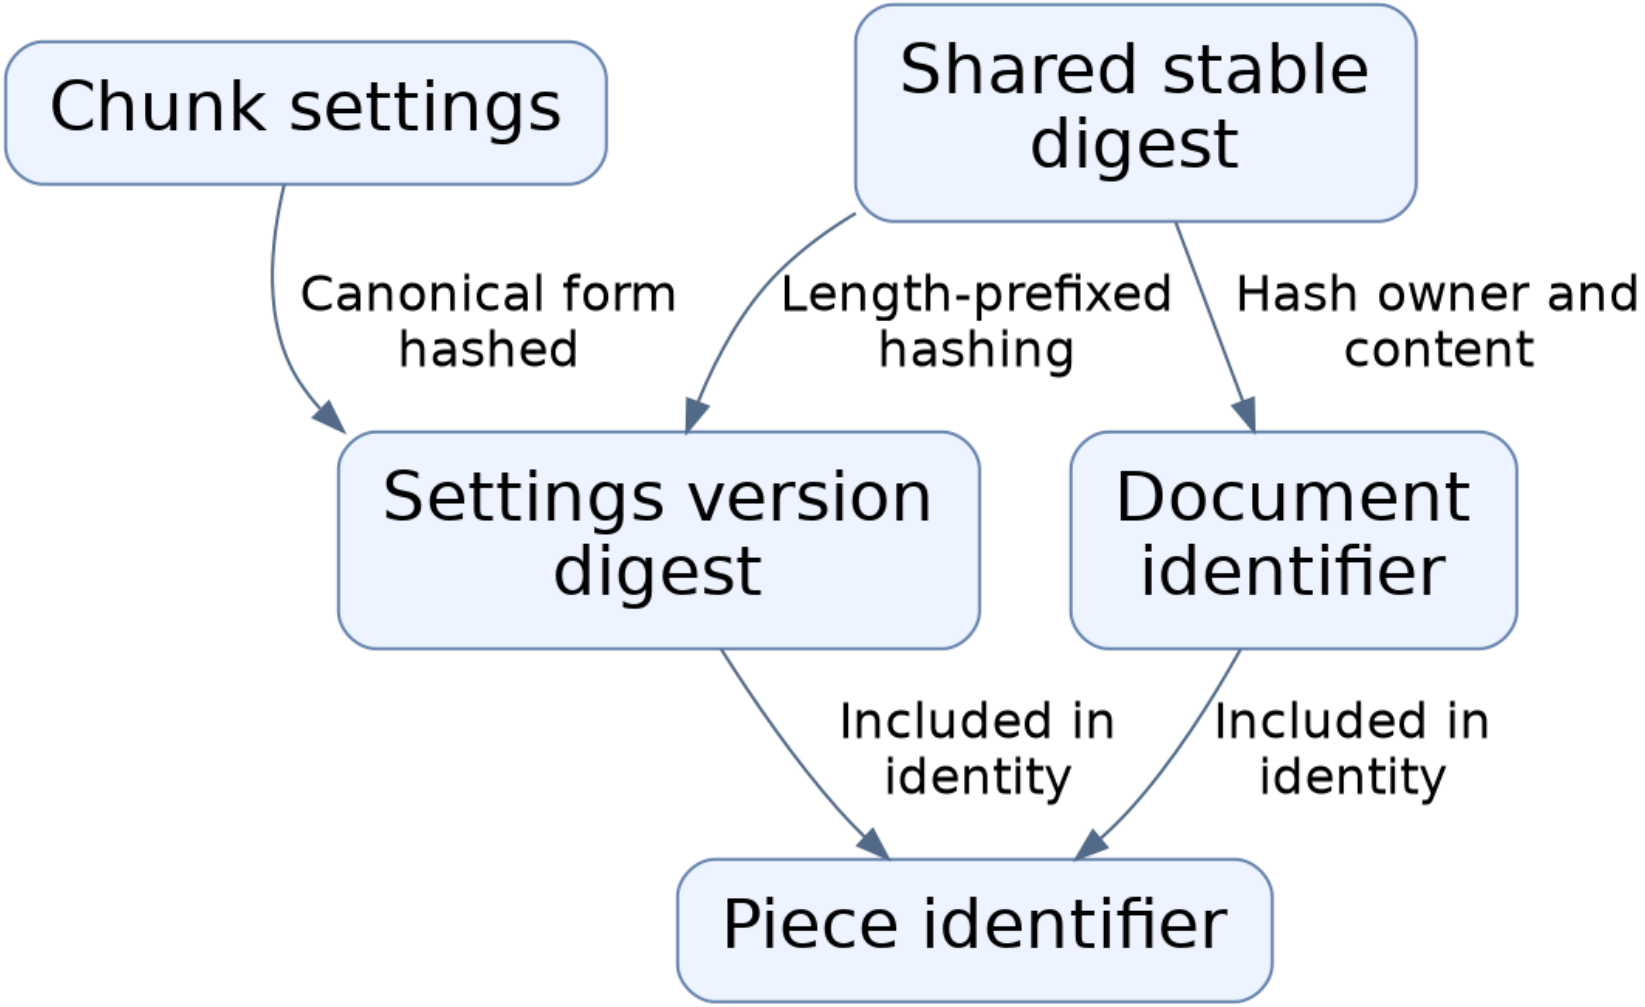

Read from top to bottom. Arrows show the direction of the interaction.