
How a dataset becomes a scored report


A hash-verified test bundle is prepared into its own search index, every test question is searched four ways, results are scored against human relevance labels, and repeatable report files are written.

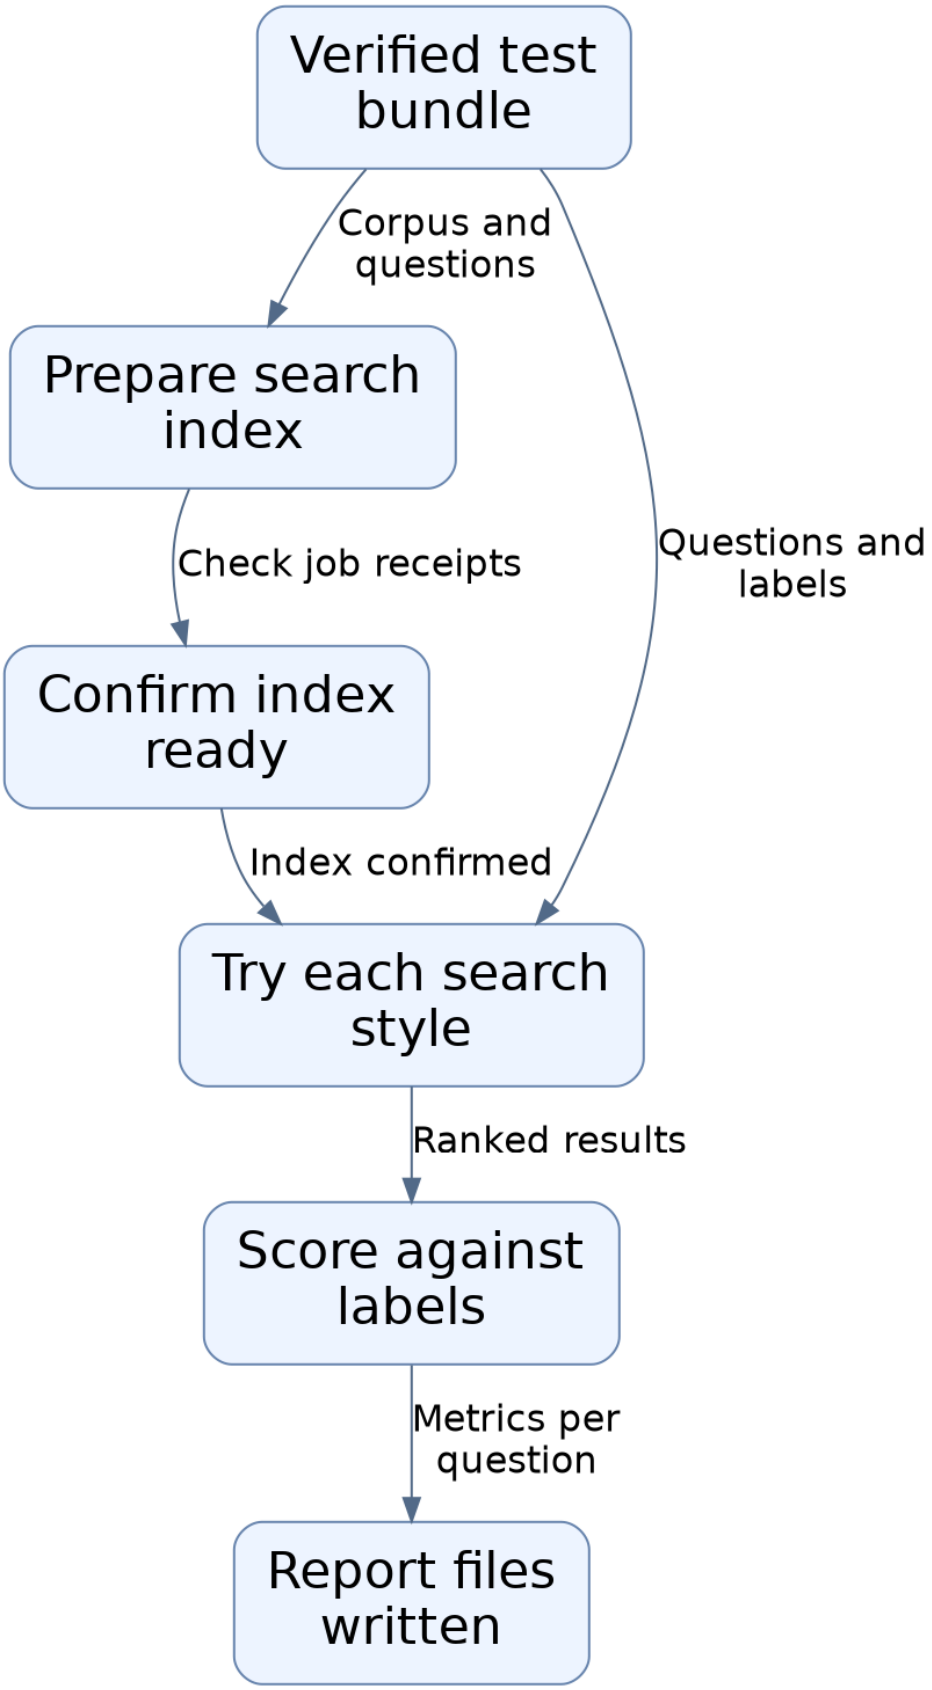

Read from top to bottom. Arrows show the direction of the interaction.

How the SciFact test set is built


A pinned public archive is downloaded and hash-checked, converted into the shared bundle format, trimmed to a deterministic 30-question, 500-document baseline, and re-loaded to prove it is valid.

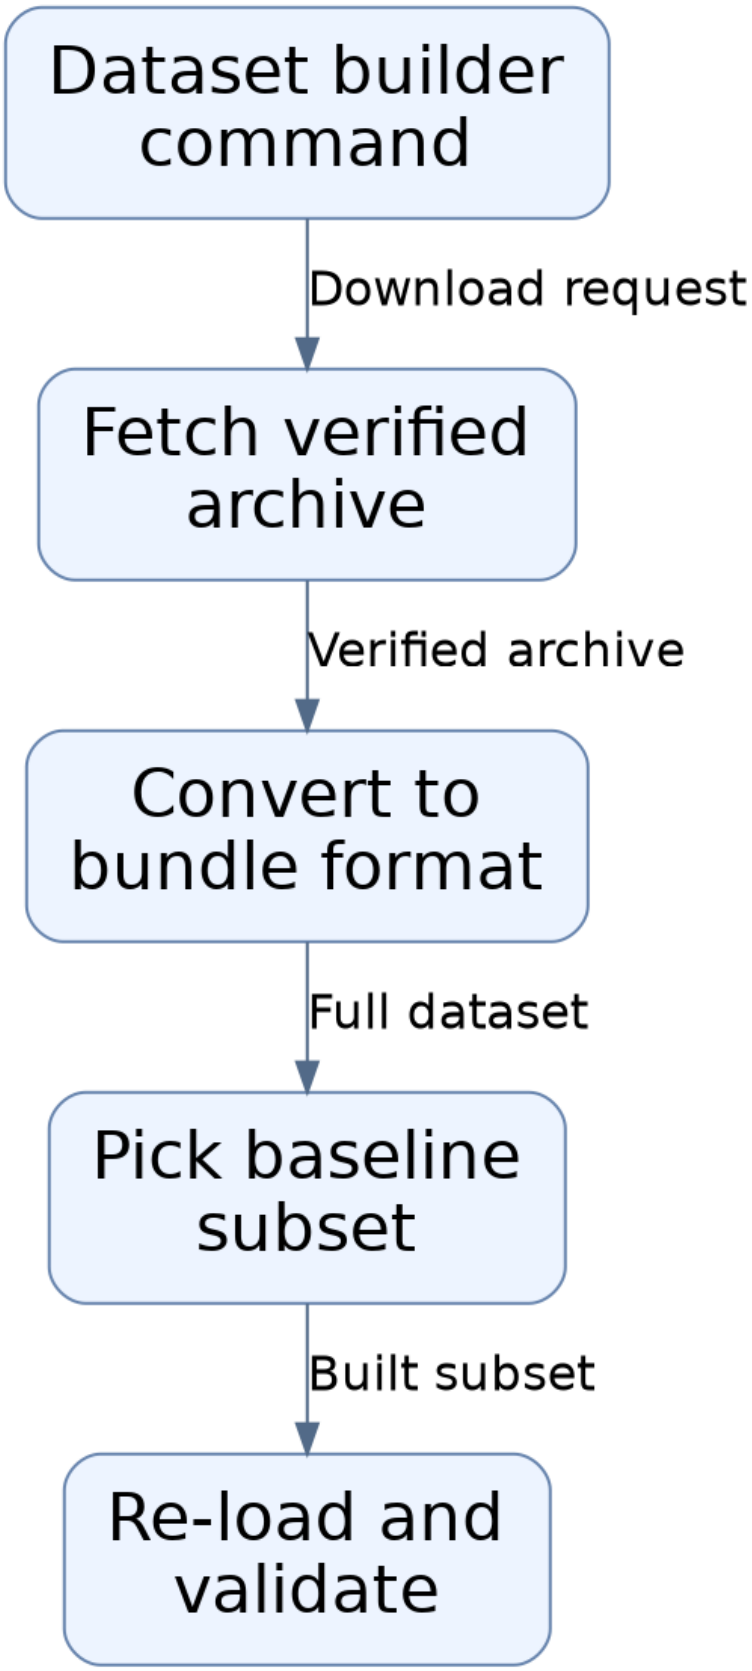

Read from top to bottom. Arrows show the direction of the interaction.

How one bundle file set is checked


A bundle directory is read with its manifest, each listed file's fingerprint is recomputed and compared, then the records are parsed and cross-checked for broken or missing relevance labels.

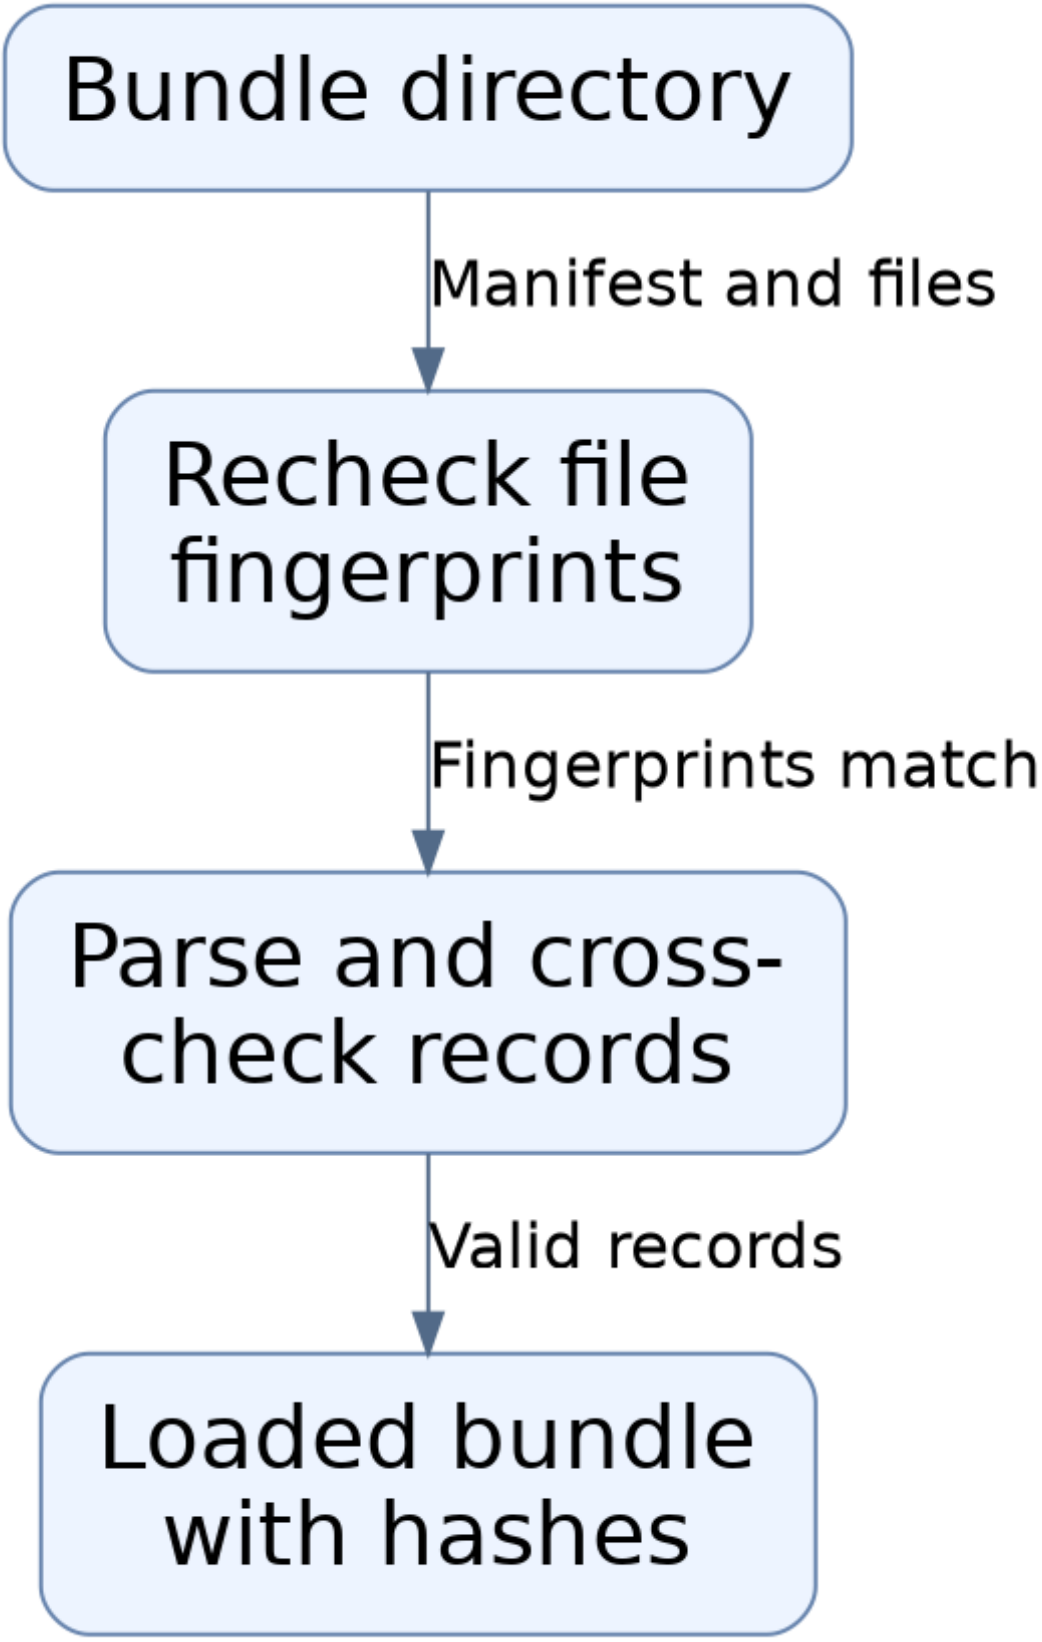

Read from top to bottom. Arrows show the direction of the interaction.

How stored evaluation records are shaped

Database tables hold per-tenant dataset bundles, their relevance labels, benchmark runs, and an audit trail; the tables only store and constrain data, and the code that moves a run through its statuses is not shown.

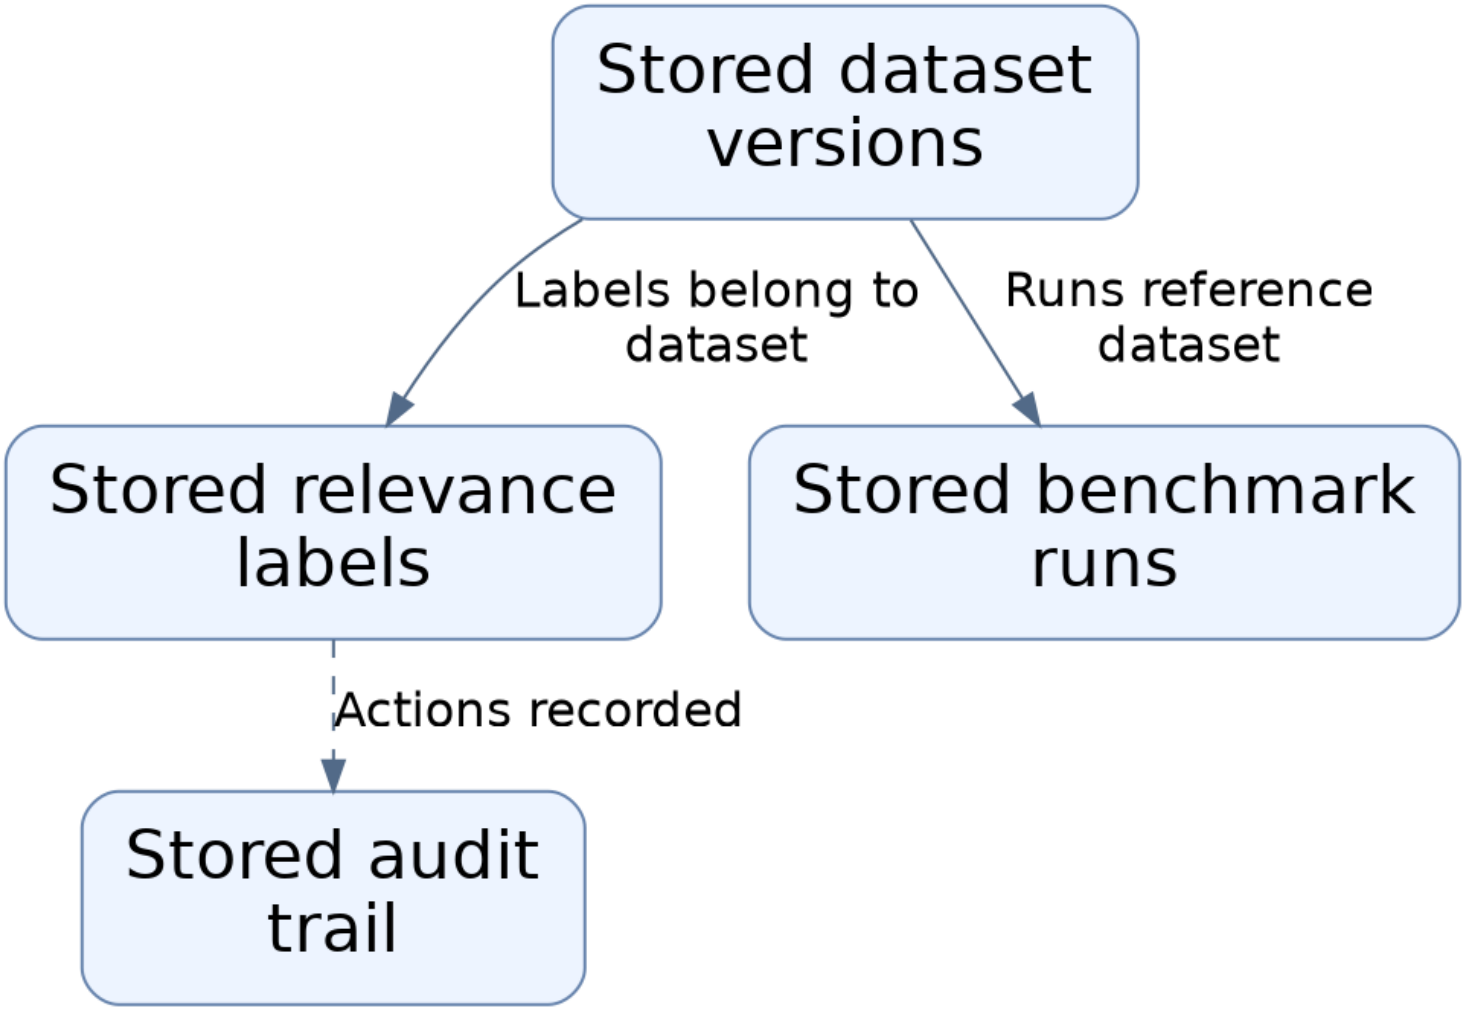

Dashed arrows: connections that need confirmation.