
How a request becomes a result


An incoming web request is identified, checked for permission against the caller's tenant and collections, then handled so it either produces a result or a consistent error reply.

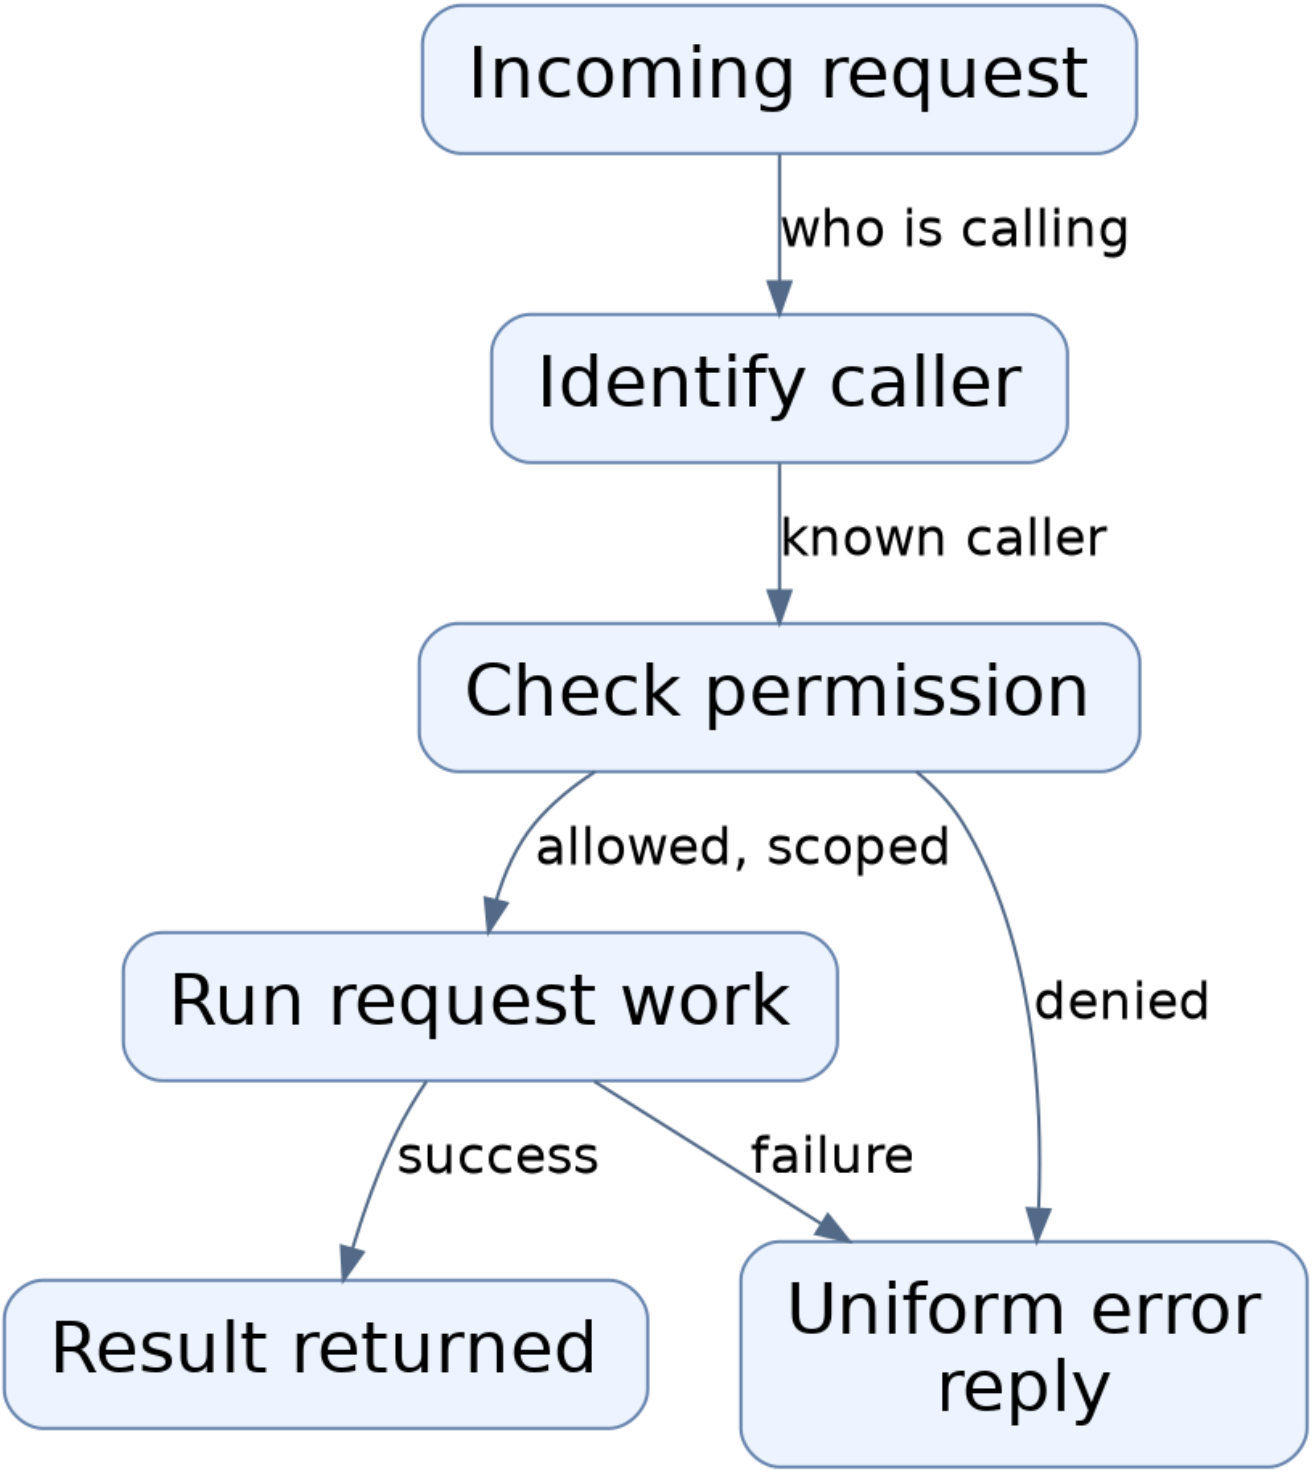

Read from top to bottom. Arrows show the direction of the interaction.

How an uploaded file becomes a stored document


A caller supplies an authorized tenant and collection scope with file bytes. The service fingerprint-checks for duplicates, saves the file off the request loop, and records document status.

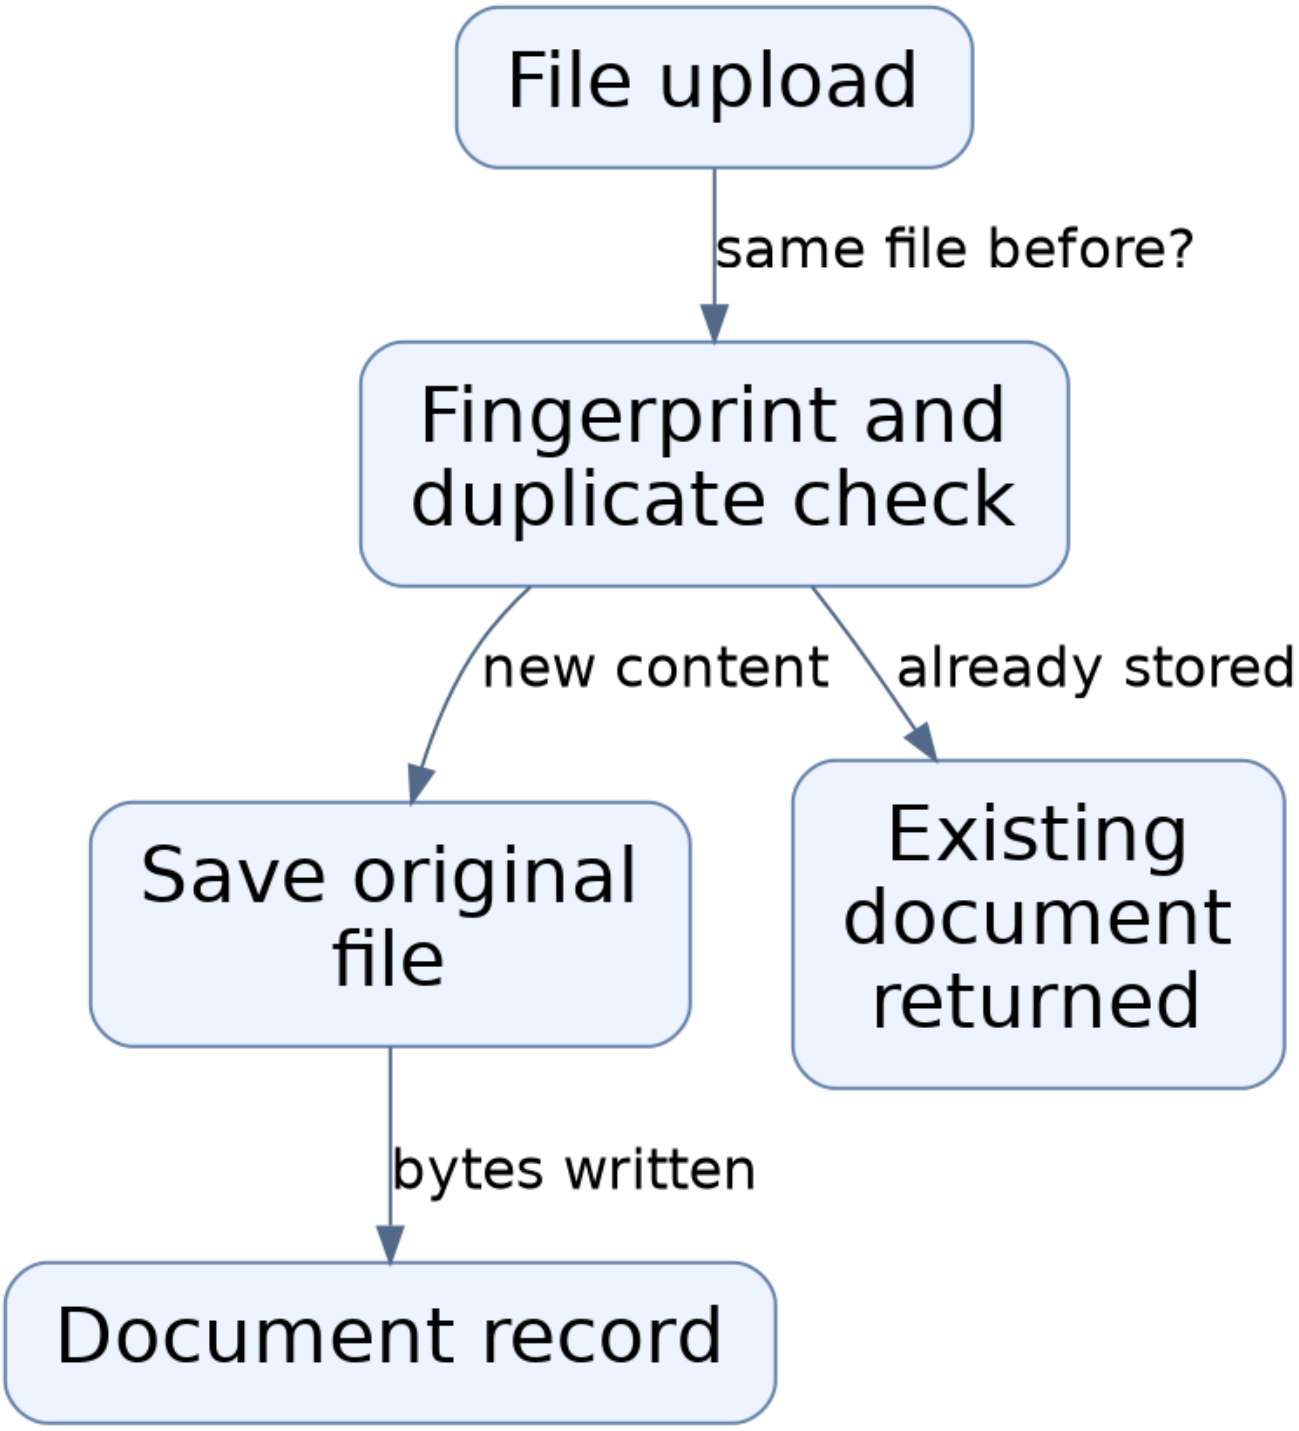

Read from top to bottom. Arrows show the direction of the interaction.

How a document is fetched or removed (1/2)


Fetching returns stored bytes only for available documents. Deletion is two steps: first the intent is saved, then the file is removed and the record marked deleted; failure leaves a retryable state.

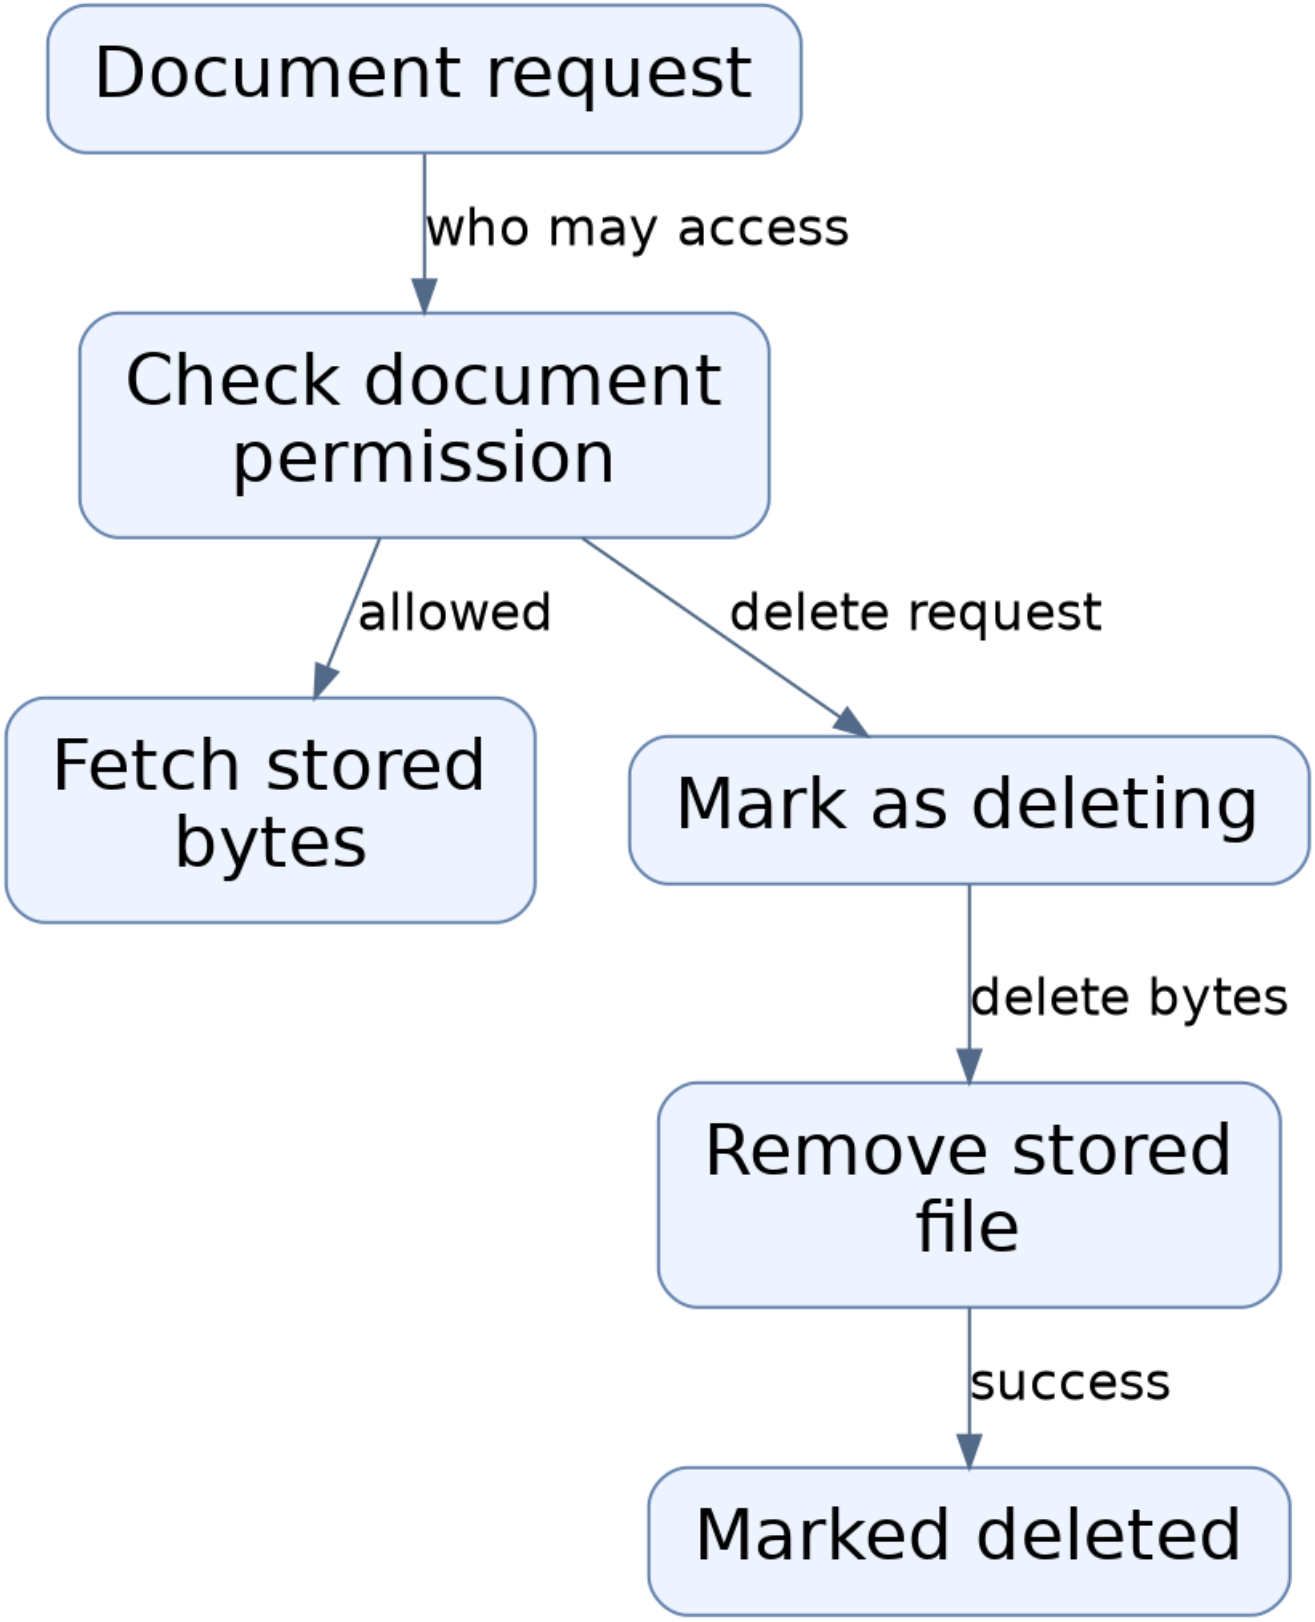

Read from top to bottom. Arrows show the direction of the interaction.

How a document is fetched or removed (2/2)


Fetching returns stored bytes only for available documents. Deletion is two steps: first the intent is saved, then the file is removed and the record marked deleted; failure leaves a retryable state.

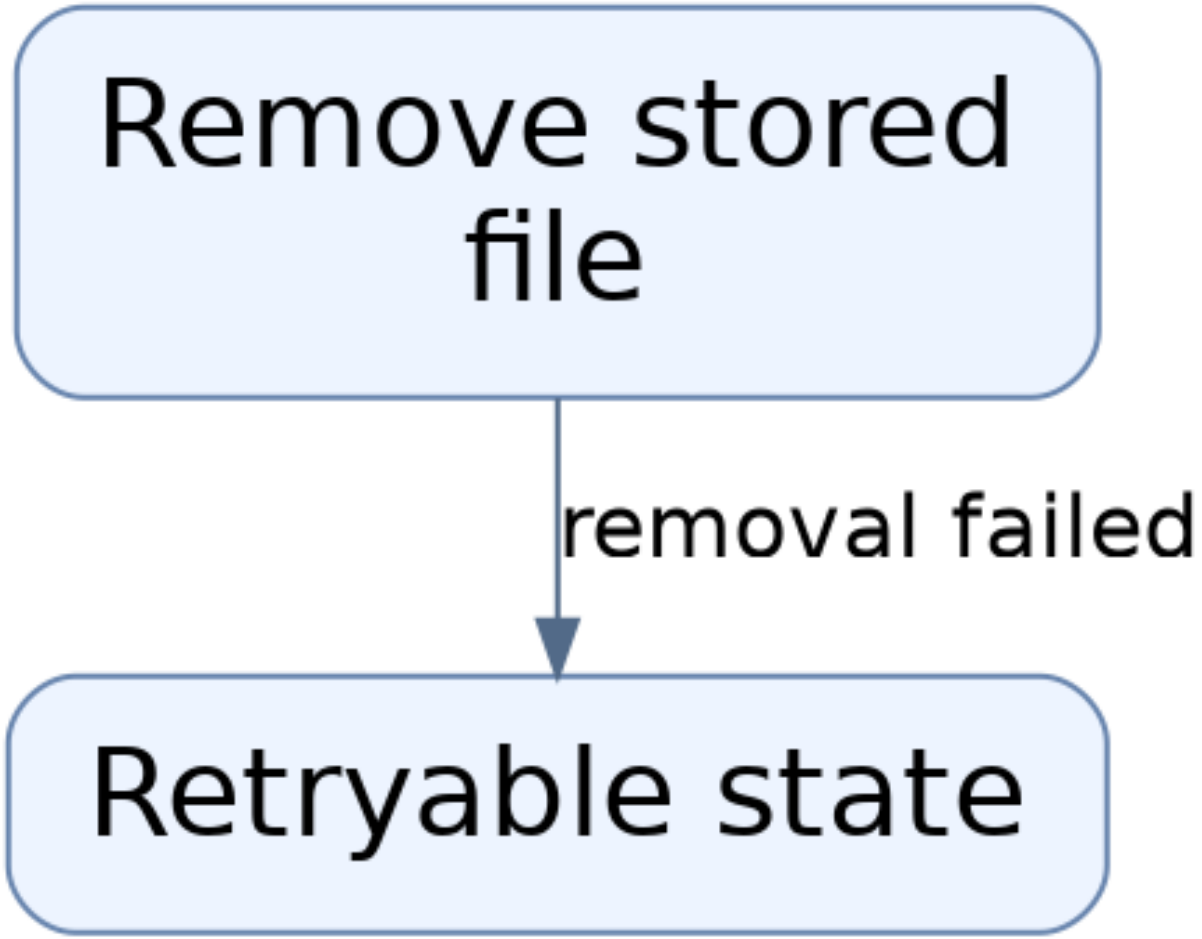

Read from top to bottom. Arrows show the direction of the interaction.

How the service reports its health


Liveness answers whether the process is running. Readiness asks each configured dependency whether it is reachable and reports ready only when all reply true.

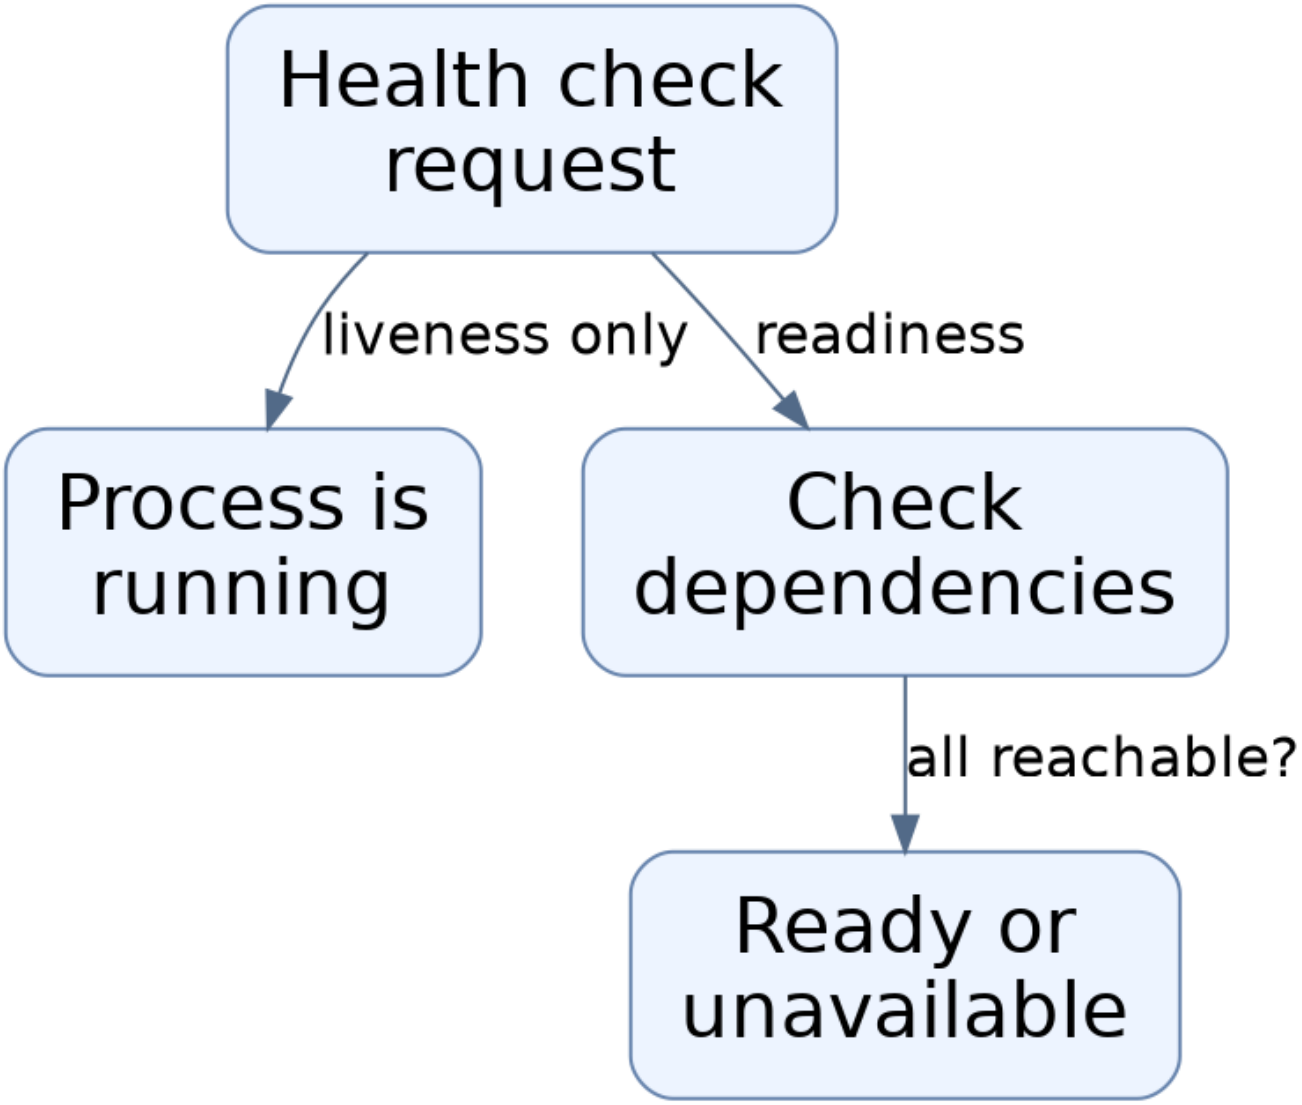

Read from top to bottom. Arrows show the direction of the interaction.

How the stored structure is shaped

Database migrations create the tables behind uploads and stored answers, keeping rows tenant-scoped and adding uniqueness rules that prevent duplicate records.

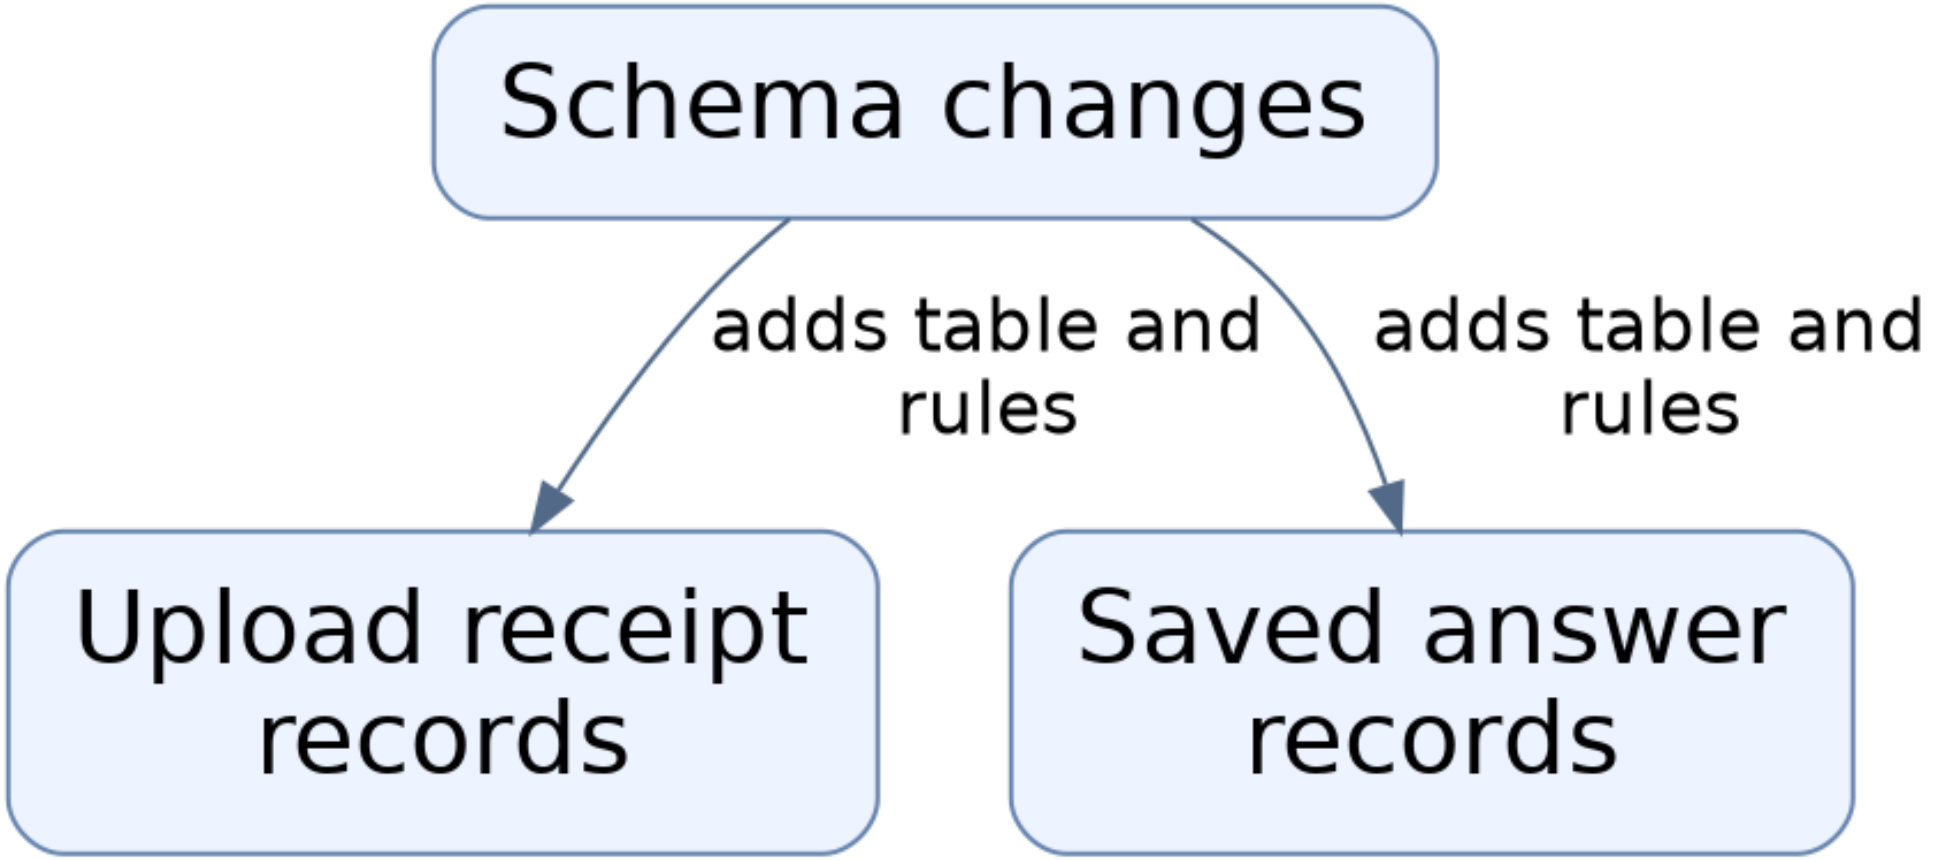

Read from top to bottom. Arrows show the direction of the interaction.