
How a document becomes an ingestion job


A caller submits a tenant, document, and pipeline version. The service saves a job, marks the document as processing, and after the database commit signals that work is ready.

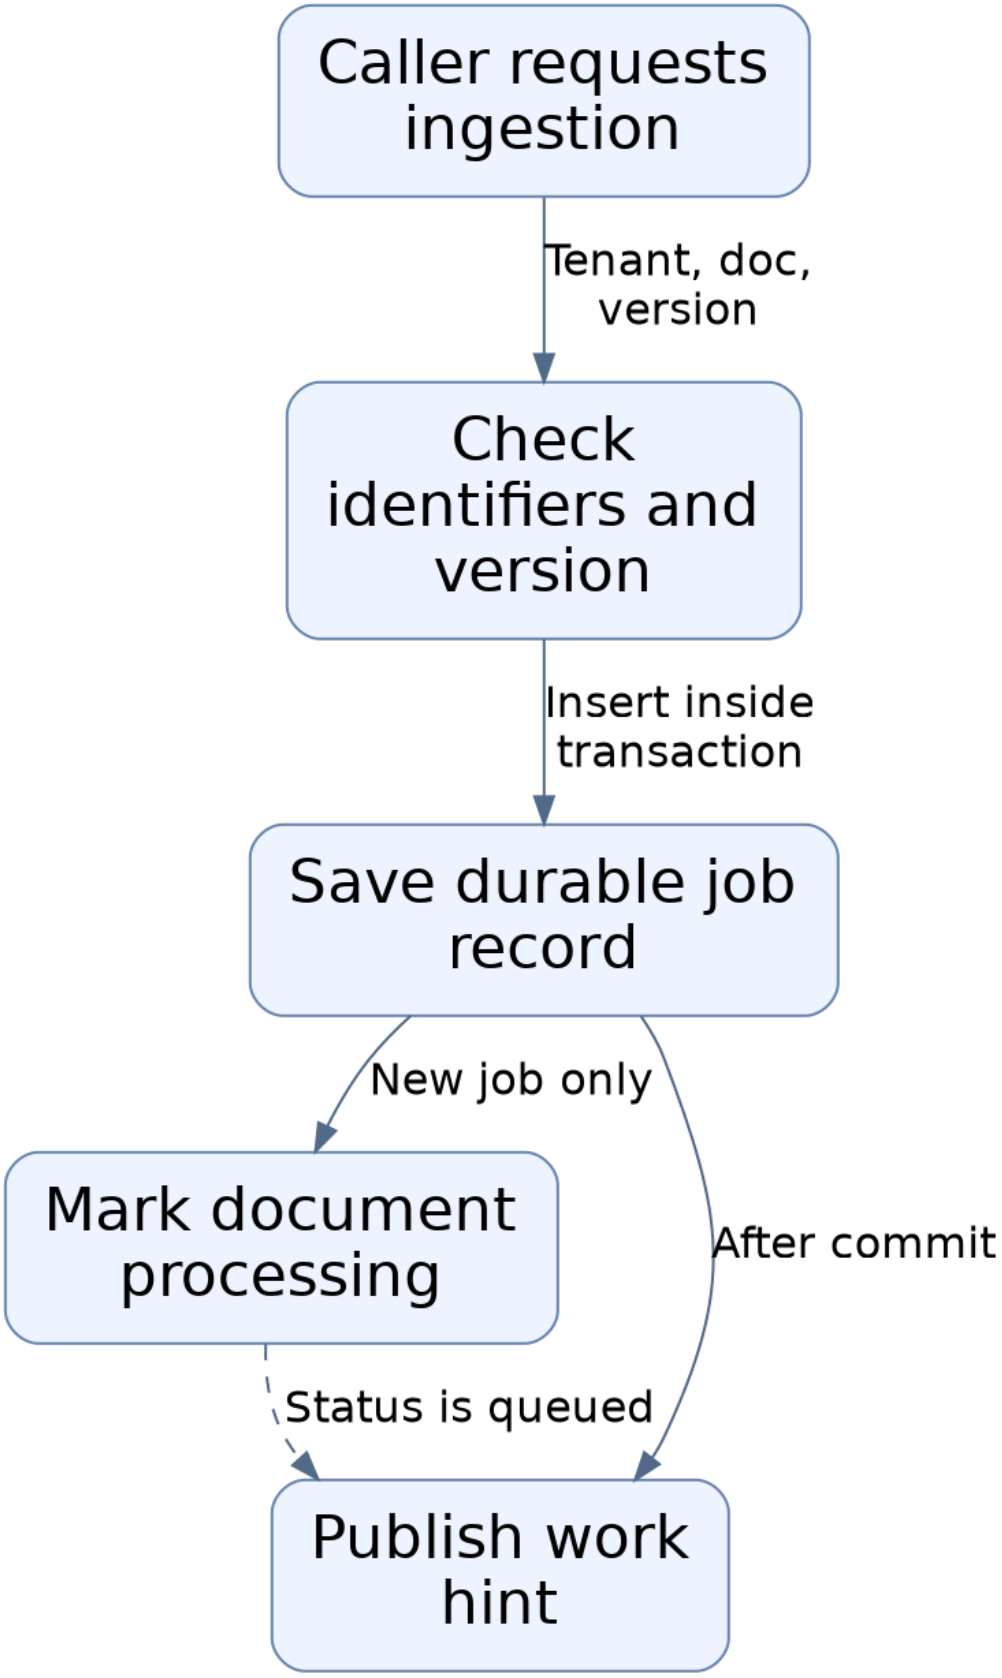

Dashed arrows: connections that need confirmation.

How artifacts are saved safely


Finished results become immutable files. Bytes are written to a temporary file, verified, then linked into place under one root so a key can never hold two different payloads.

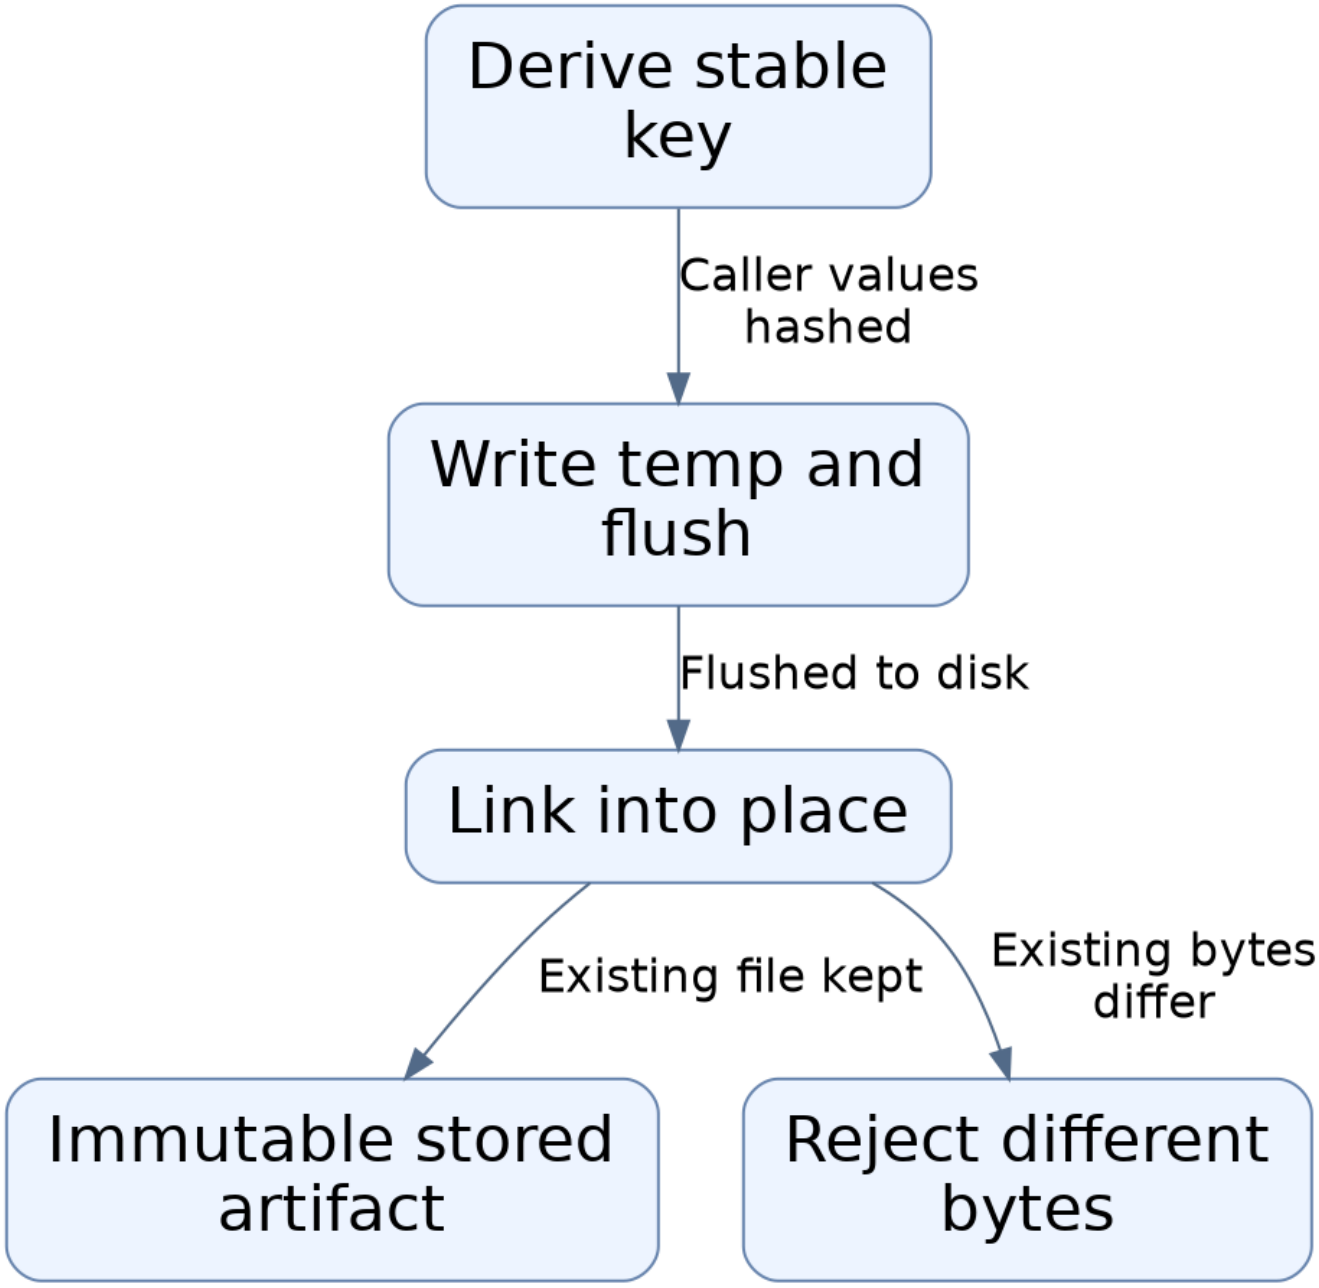

Read from top to bottom. Arrows show the direction of the interaction.

How artifacts are read back


A stored artifact is fetched by its reference and re-checked against the declared size and checksum. Bad bytes or malformed keys are rejected rather than returned.

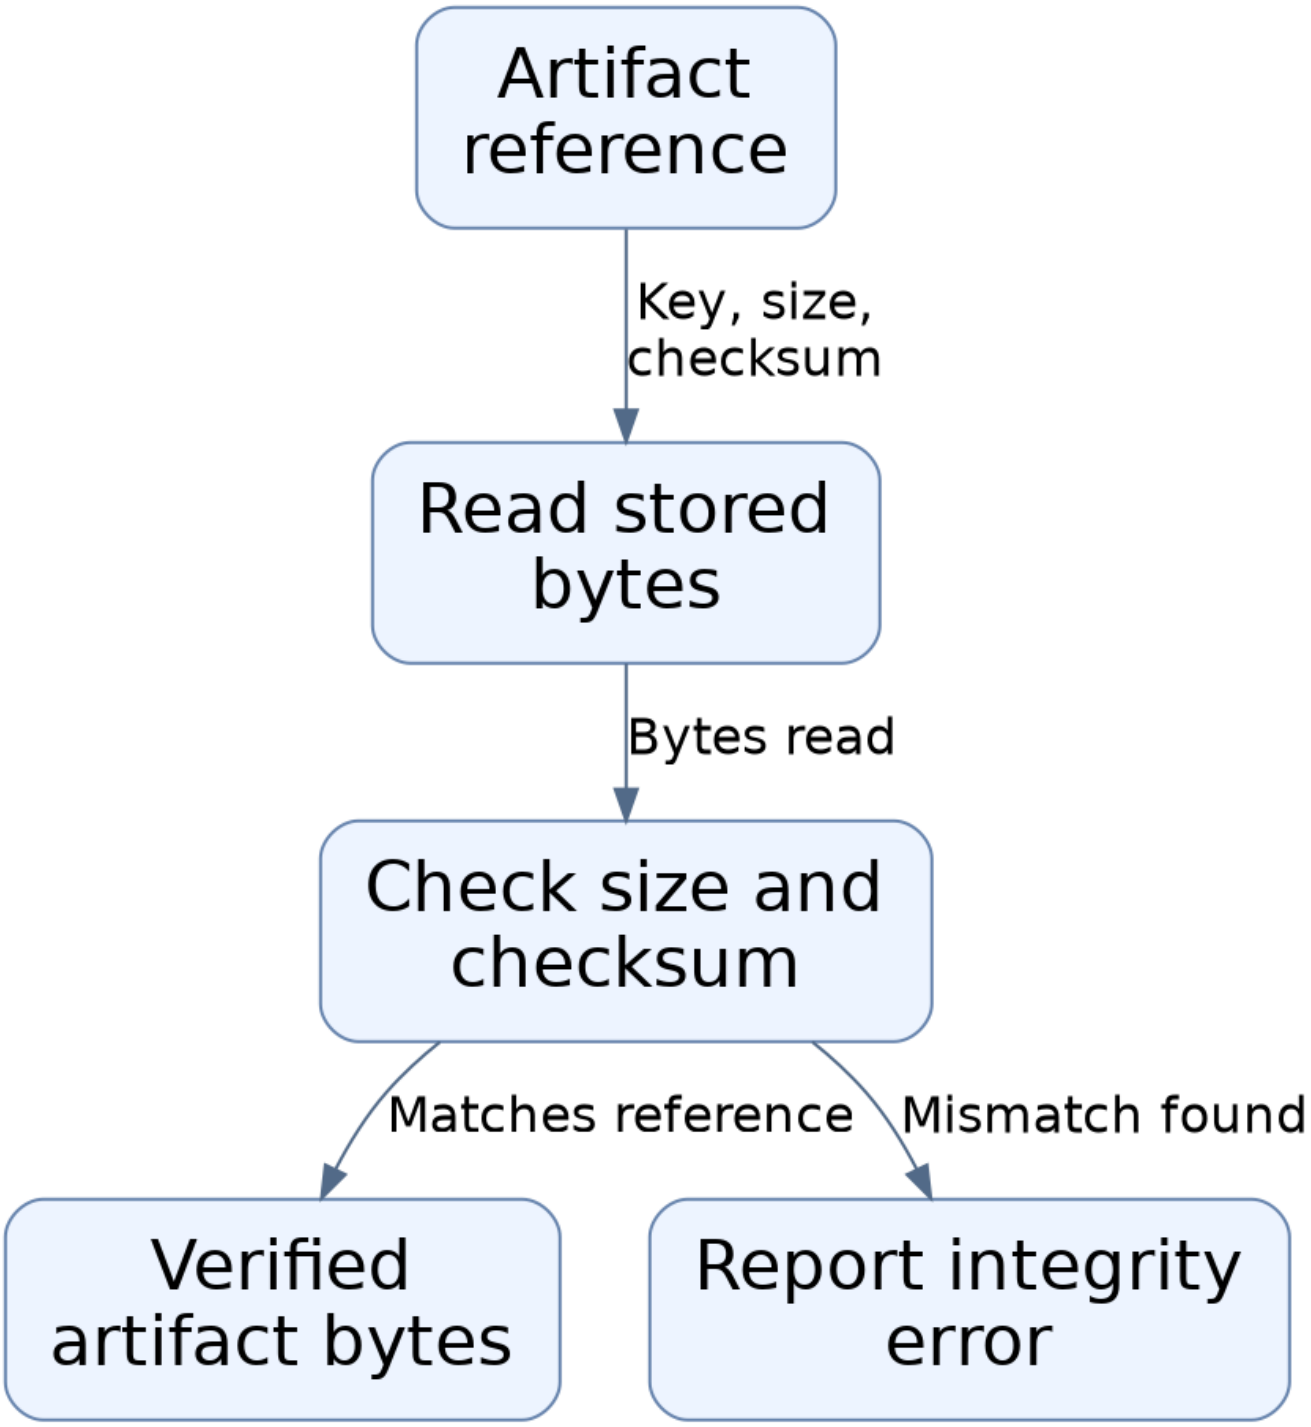

Read from top to bottom. Arrows show the direction of the interaction.

Where the checkpoint values come from

Artifact references and payloads travel through checkpoints in a strict, stable form: only key, checksum, and size fields are allowed, and payload values are serialized deterministically.

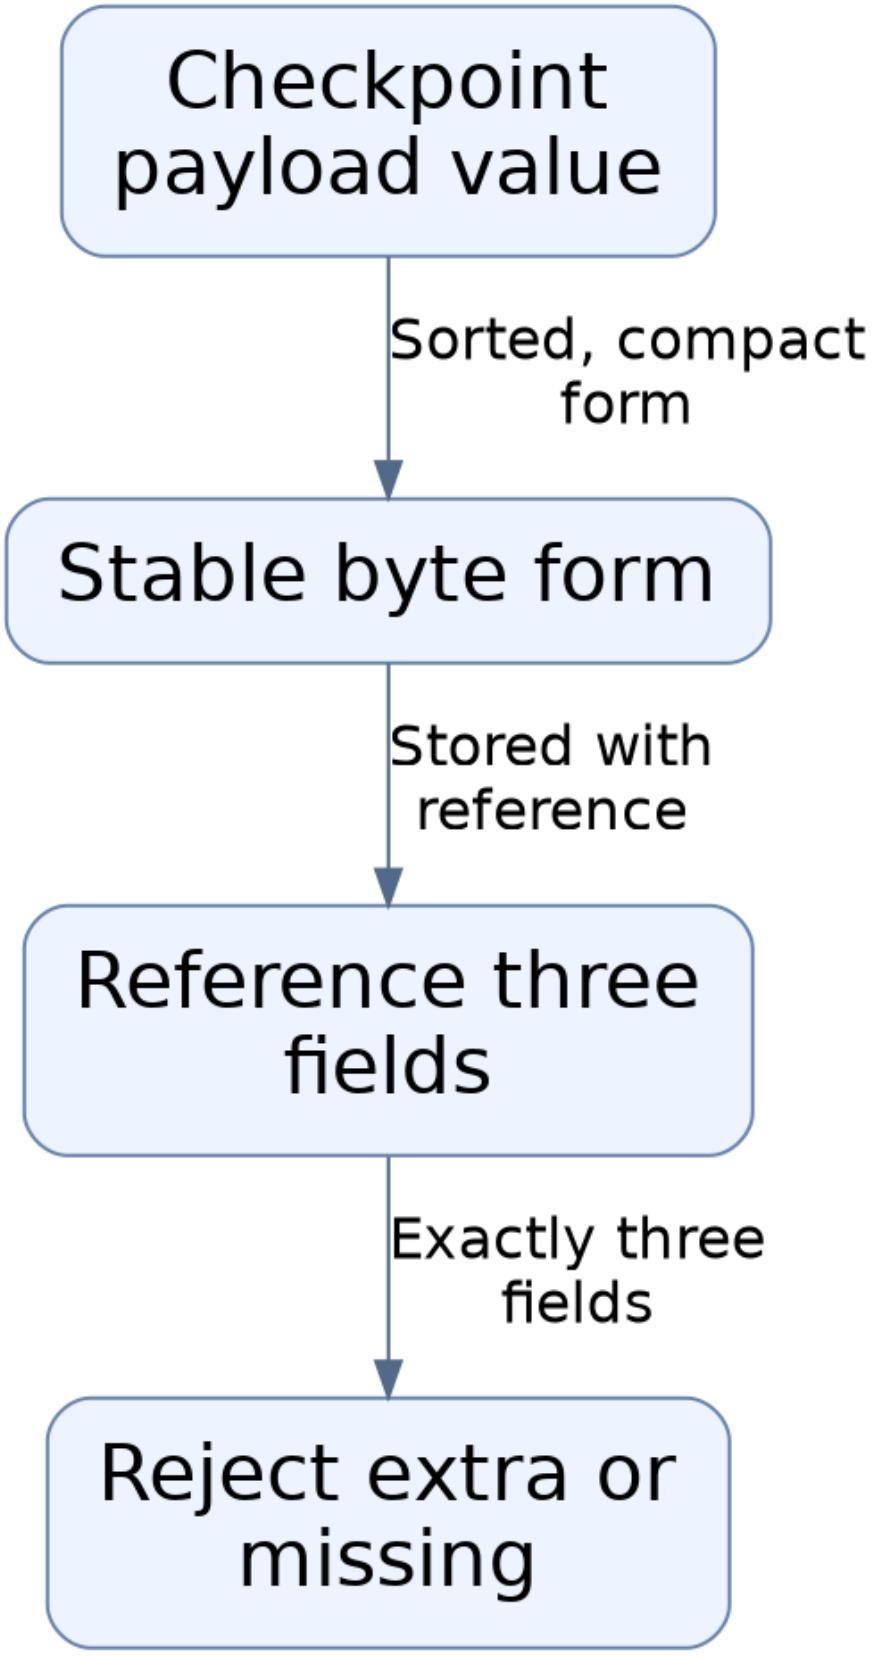

Read from top to bottom. Arrows show the direction of the interaction.