

Architecture

Fake and Cohere adapters implement shared request/result contracts behind a protocol, with errors and usage/cost helpers as cross-cutting modules.

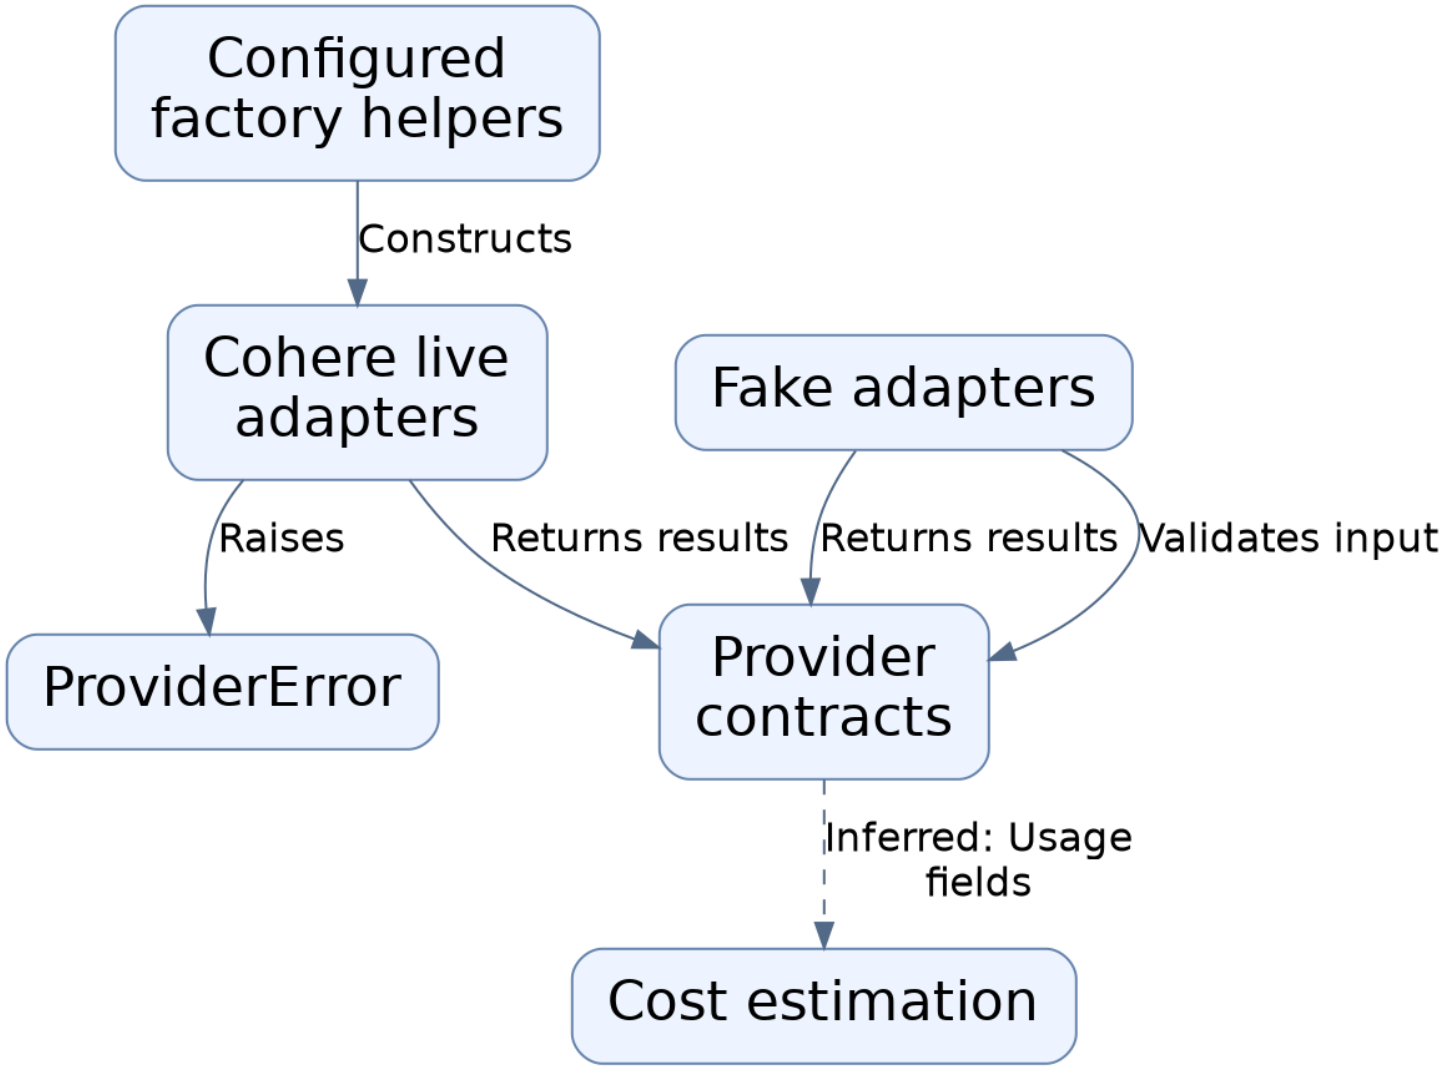


Chunk identity flow

ChunkingConfig validation feeds a canonical JSON version string, and chunk content plus sorted source spans feed a stable chunk_id digest.

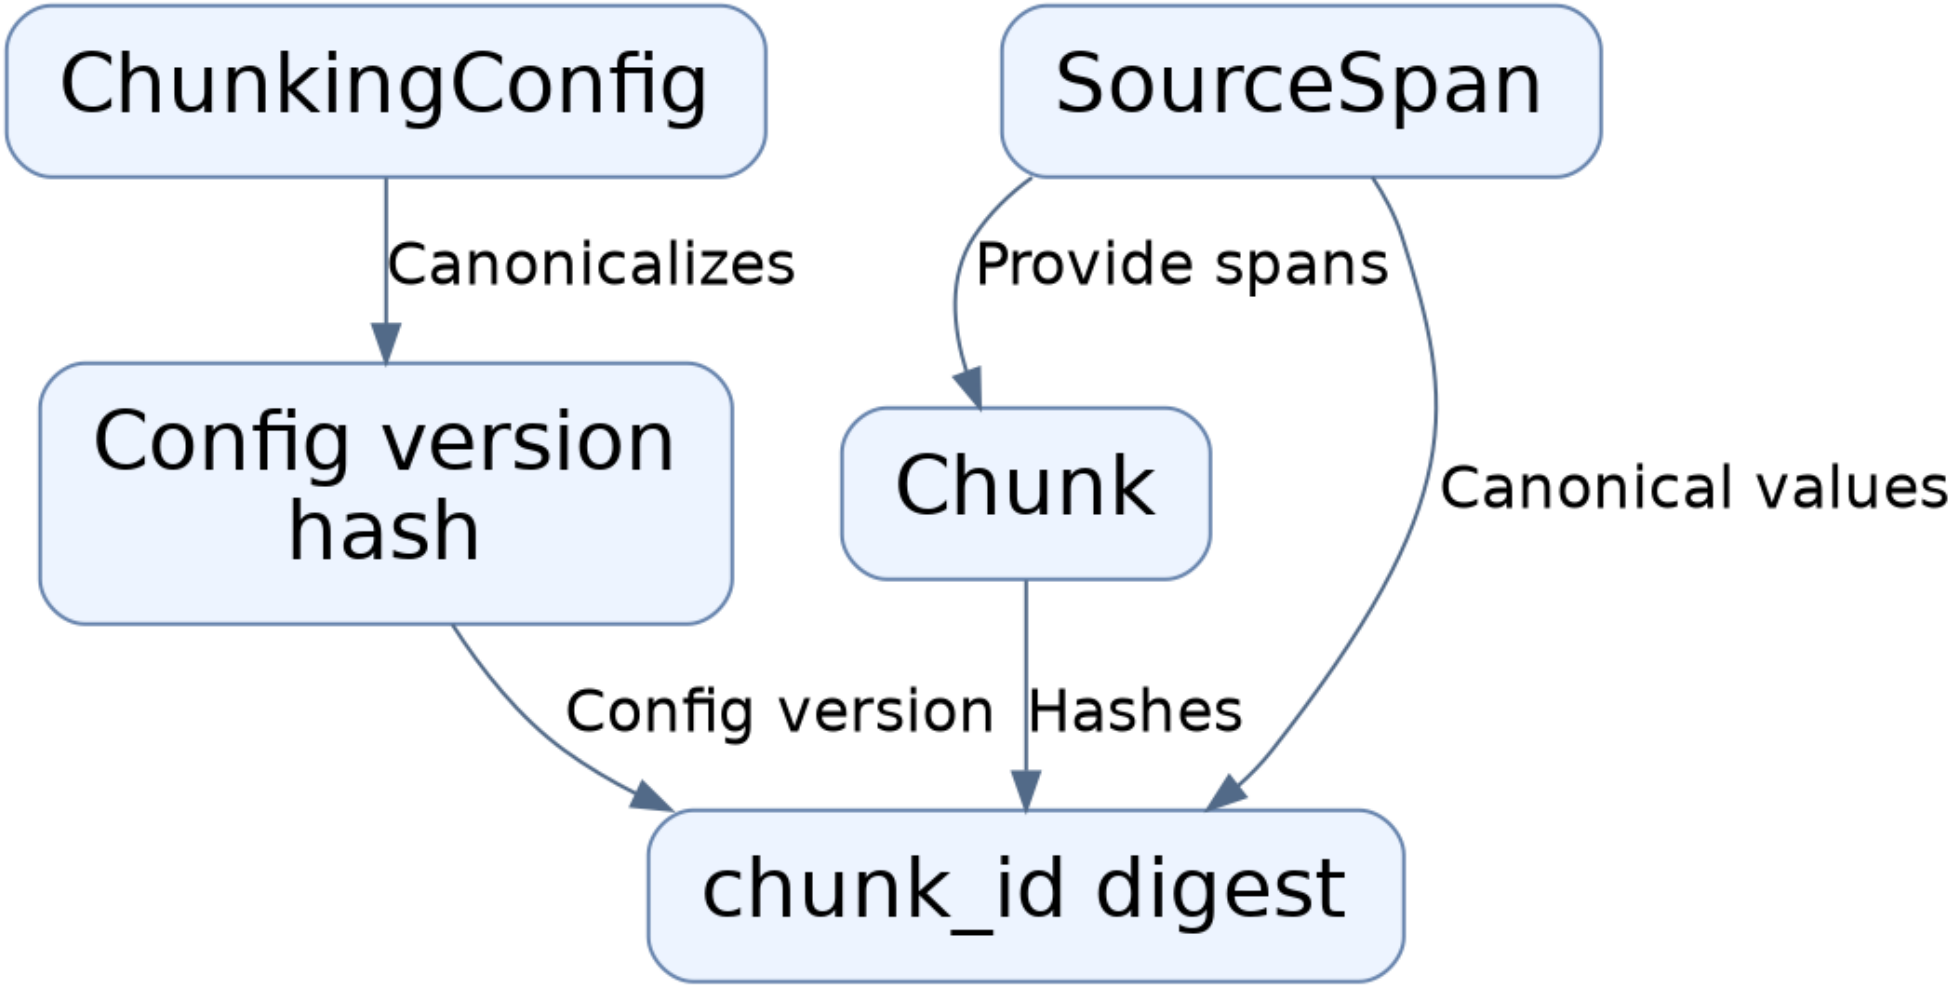


Generation request path

A GenerationRequest is validated, sent via Cohere's non-streaming chat with a hard timeout and no retries, then parsed into a GenerationResult or returned as a code-mapped ProviderError.

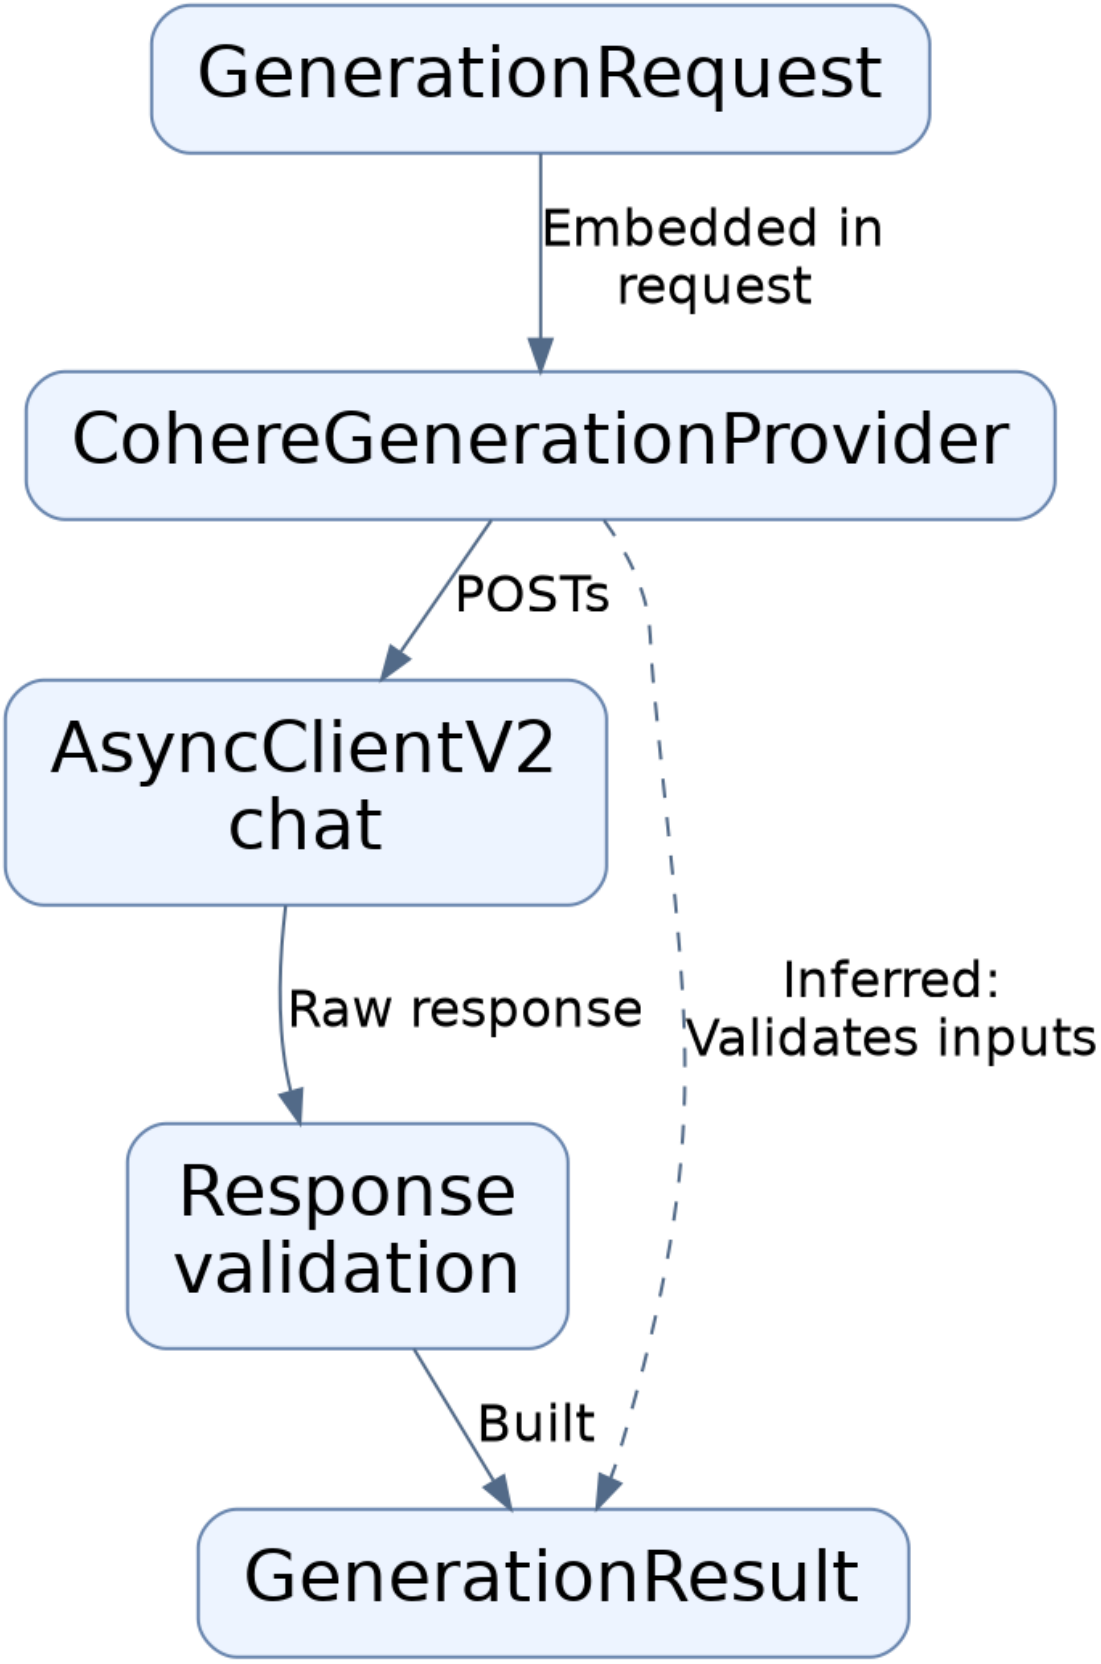

Generation error mapping

SDK and transport failures, HTTP statuses, and malformed responses are translated into sanitized retryable or non-retryable ProviderError codes.

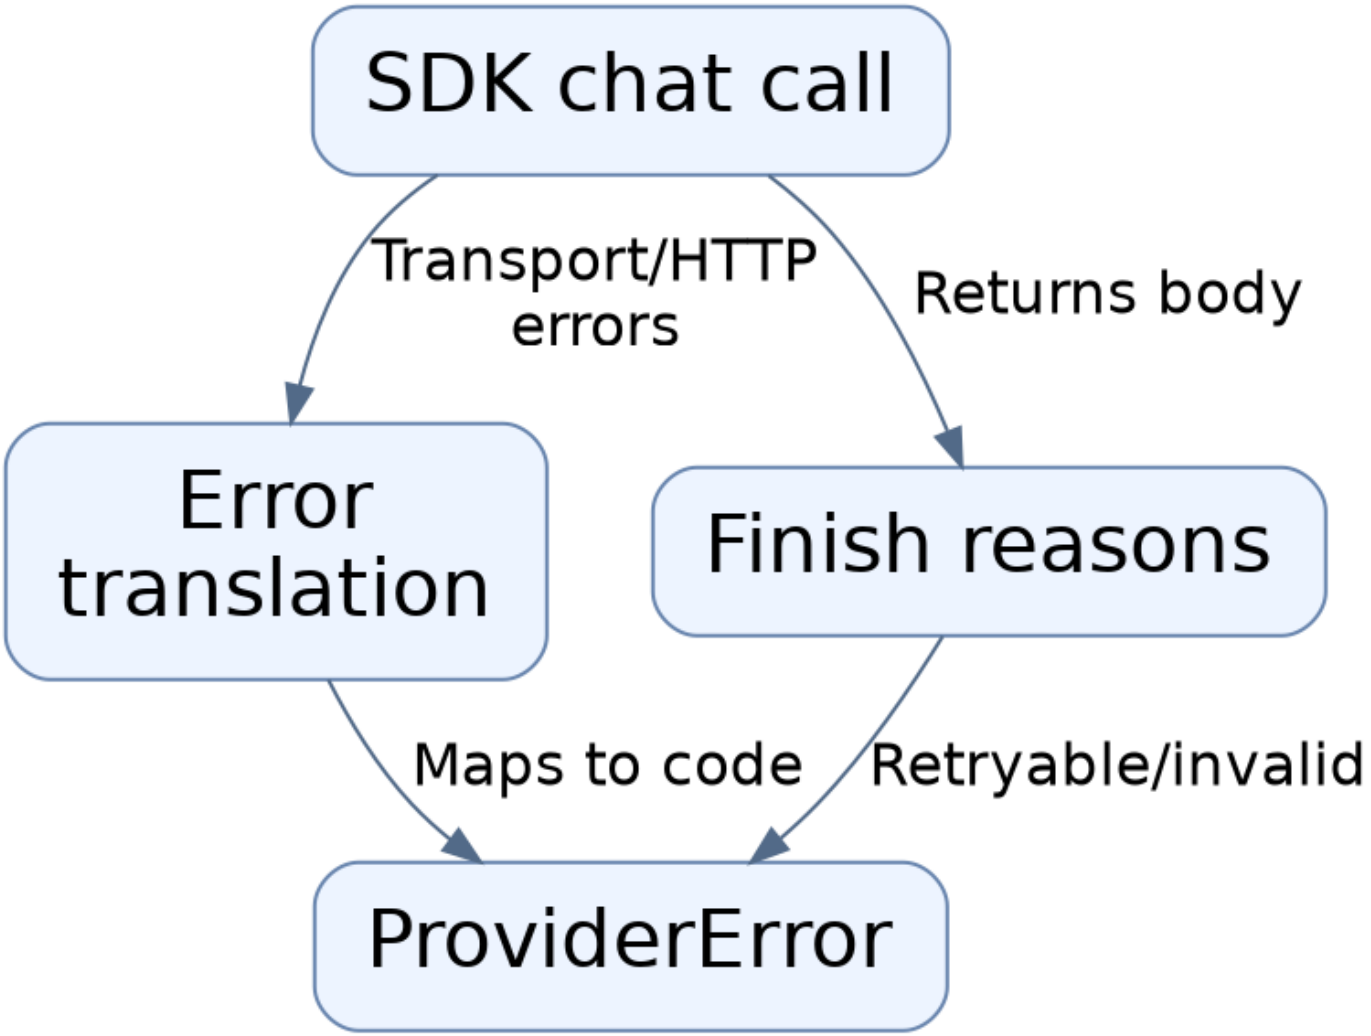

Fake adapter behavior

The fake implementations deterministically derive outputs from request contents with zero billing, serving as the default non-live path.

