

Architecture

The chunking package surface delegates to a chunker that consumes parsed blocks and a tokenizer, assembling content-addressed Chunk contracts via embedding-text and identity helpers.

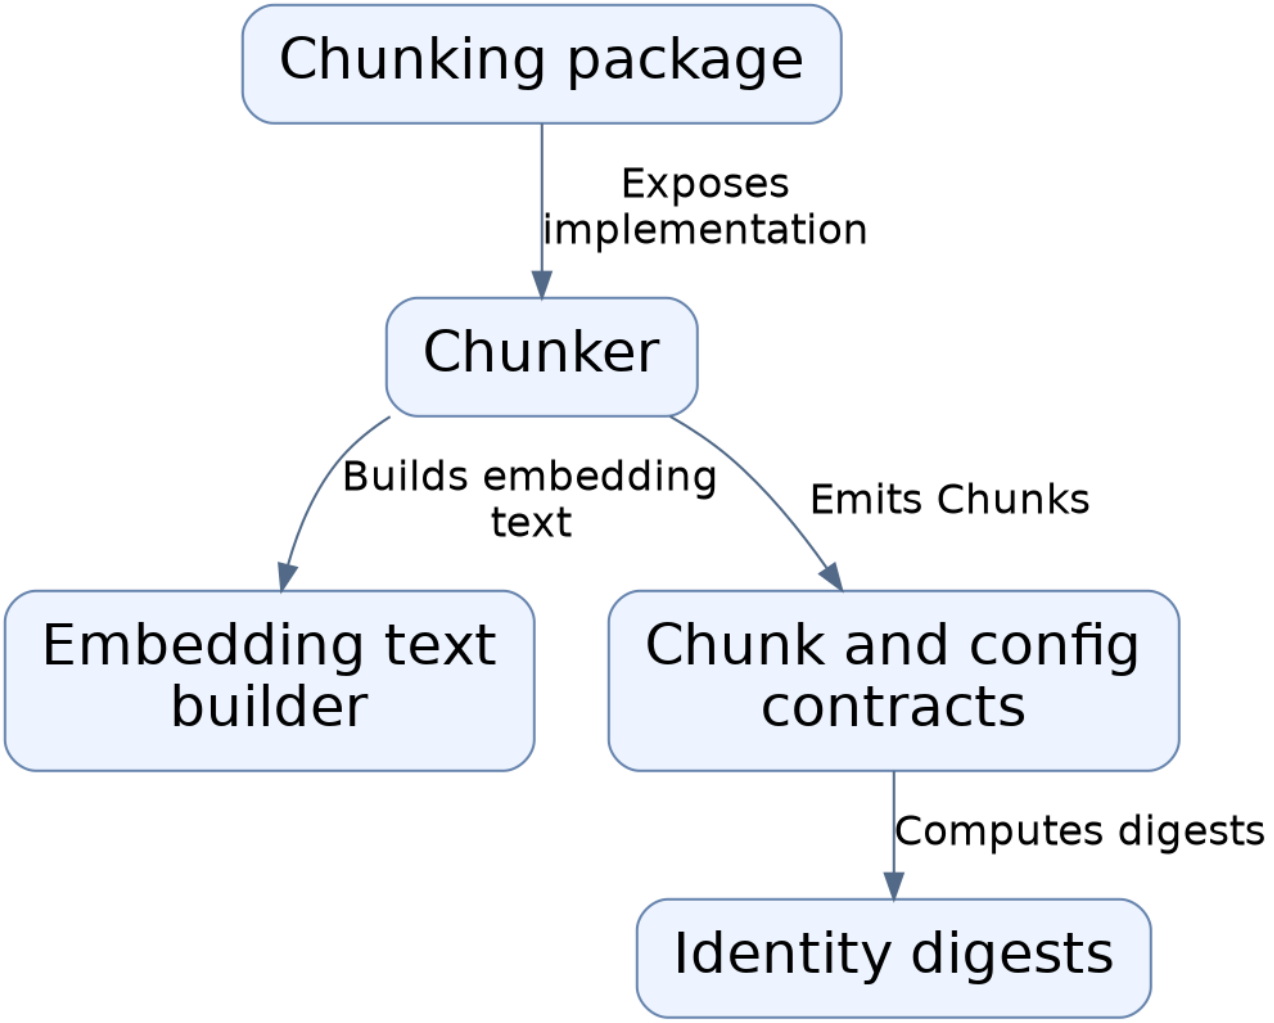


Section chunking flow

chunk_document groups blocks by heading path, chunking each section independently so no chunk crosses a heading boundary.

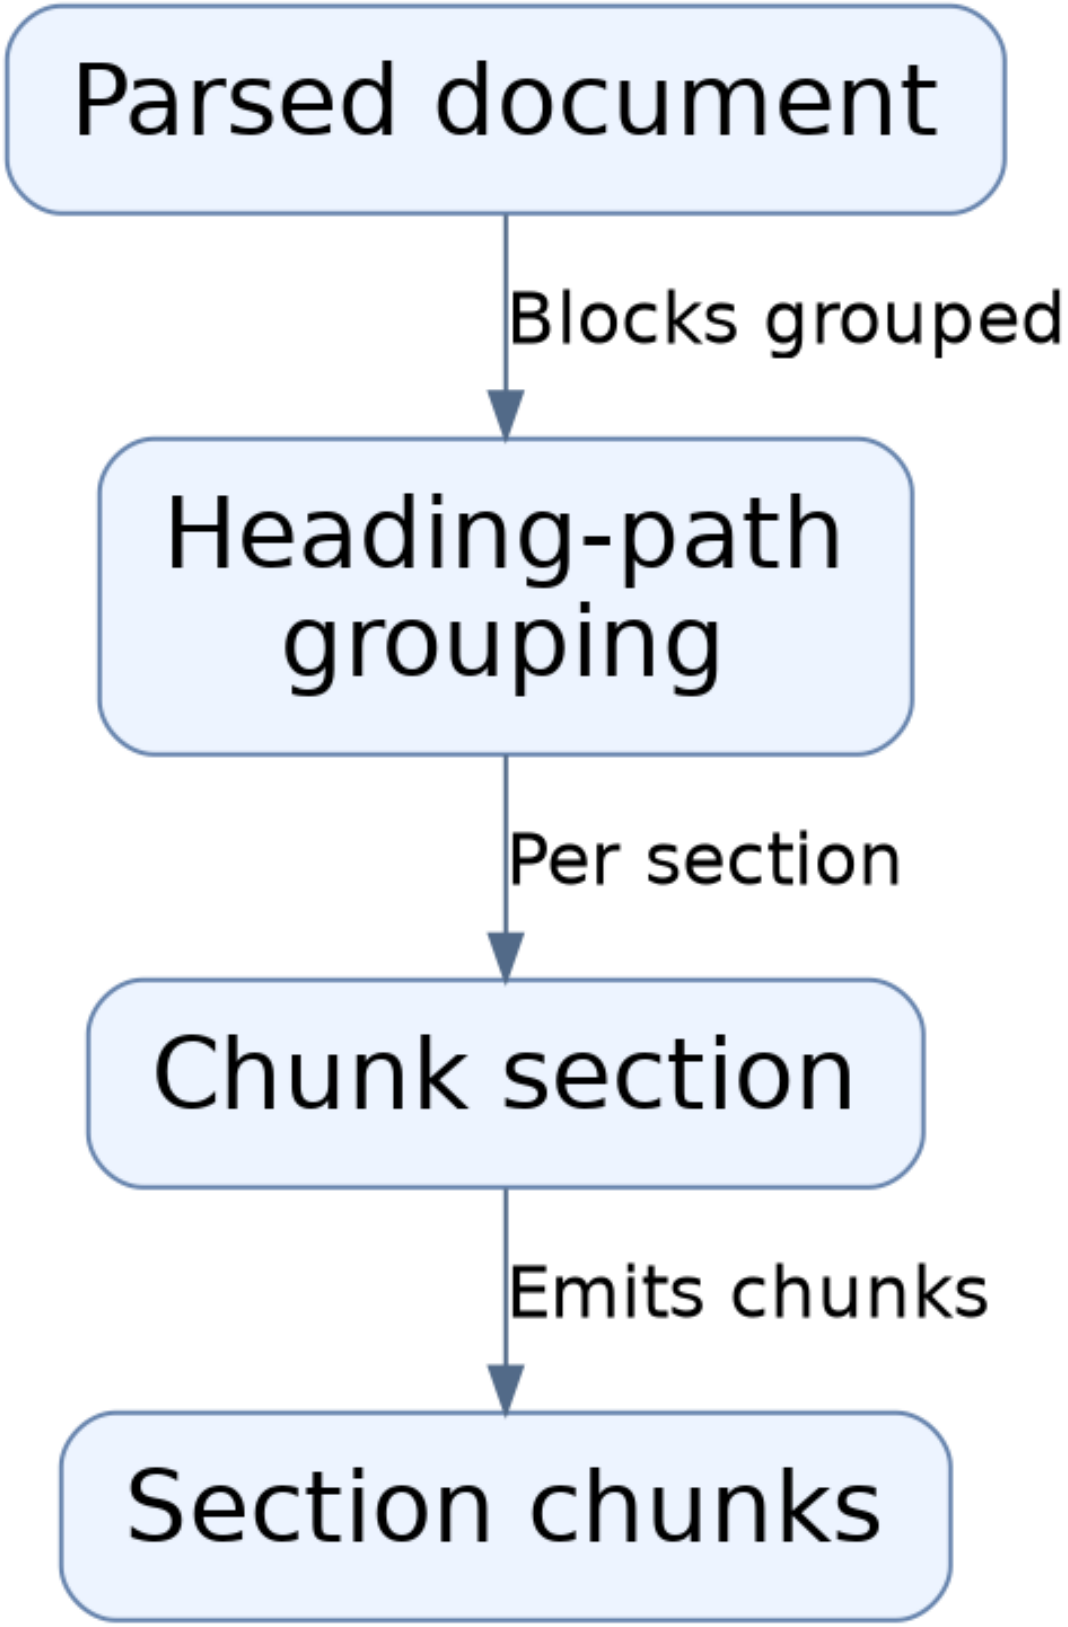


Greedy packing and splitting

Blocks accumulate while token counts stay within the limit; oversized blocks are split by binary search and overlap carry feeds the next chunk.

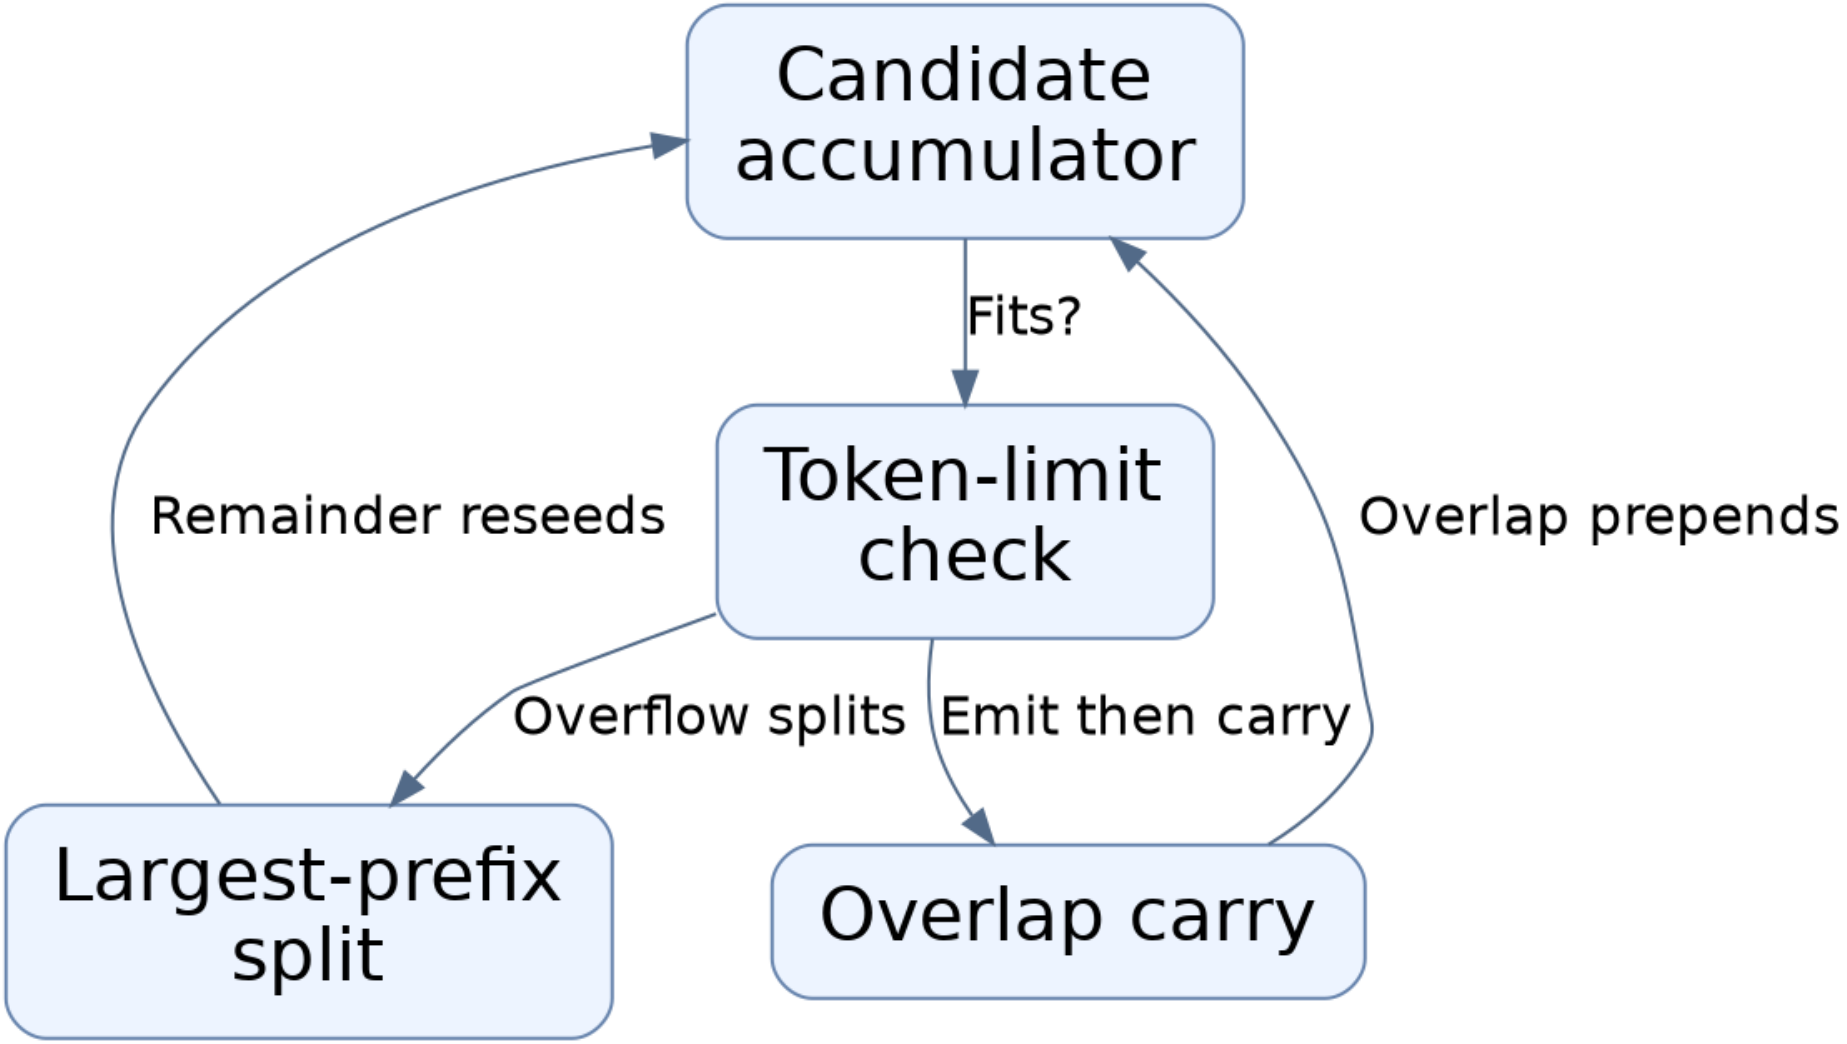

Embedding text enrichment

build_embedding_text reconstructs Markdown headings and strips a duplicated leading heading block before embedding.

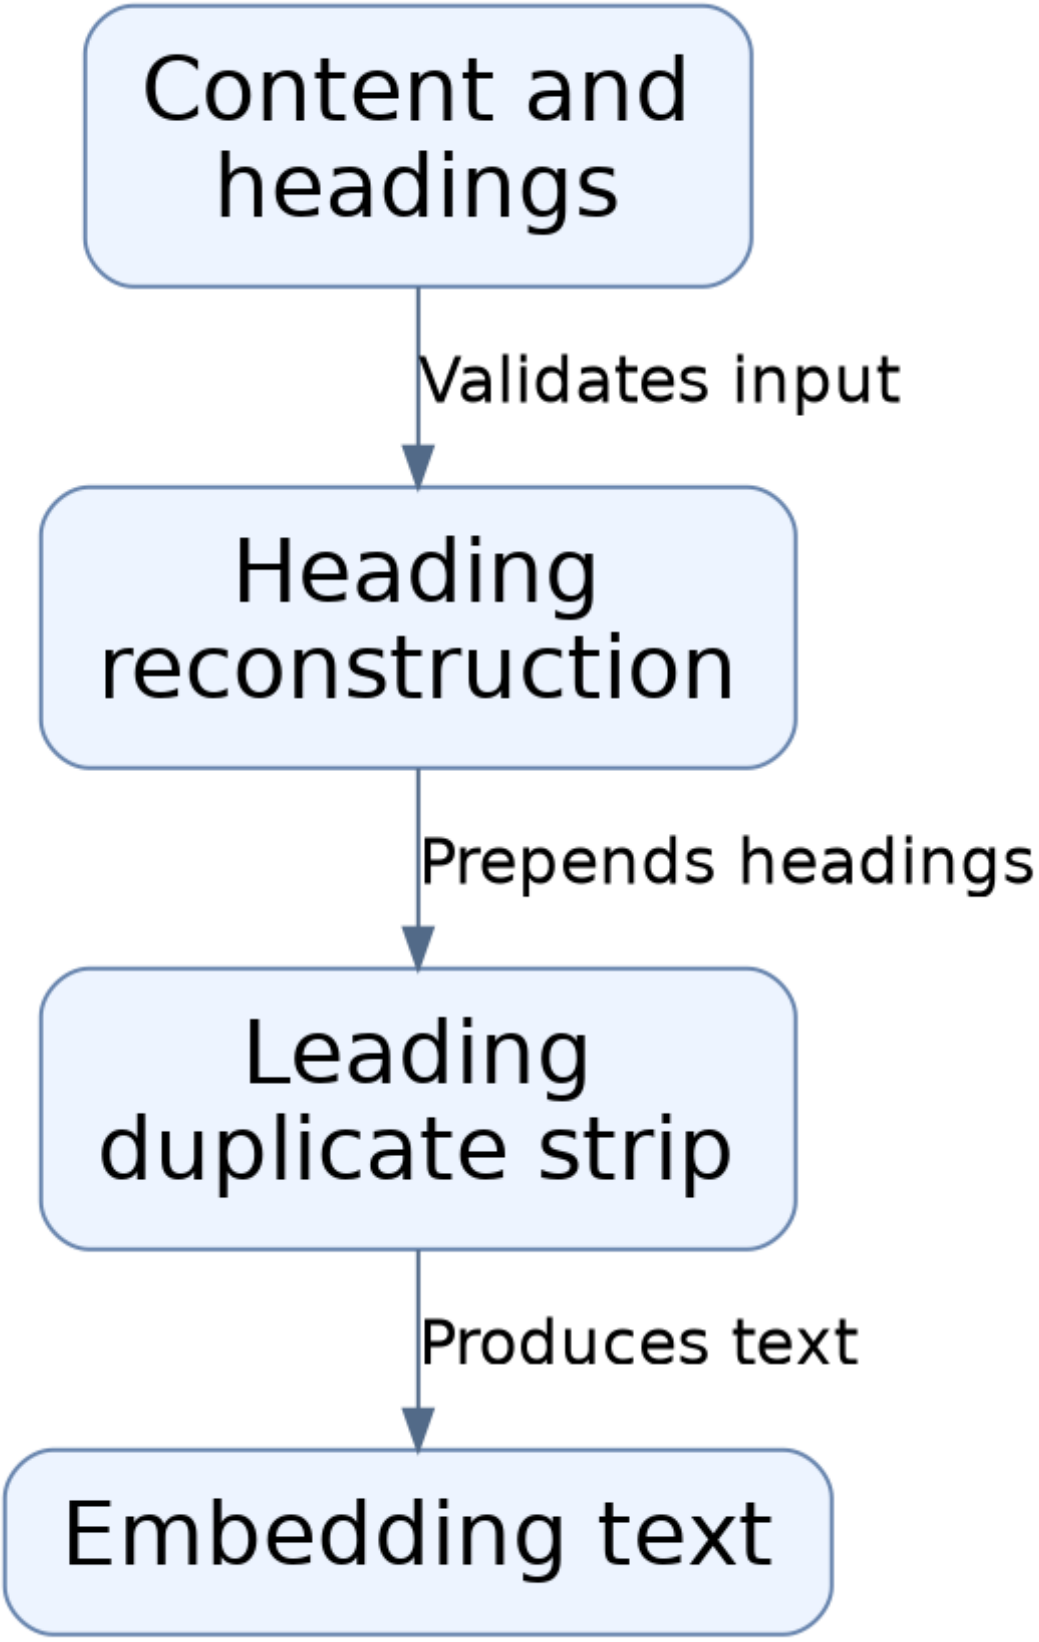

Config and identity derivation

ChunkingConfig validates limits and derives a version digest; Chunk ids and document ids derive from stable_digest over canonical fields.

