

Architecture

Settings flow into a dense retrieval config; the retriever uses an embedding provider and OpenSearch to serve queries, sharing result contracts with lexical retrieval.

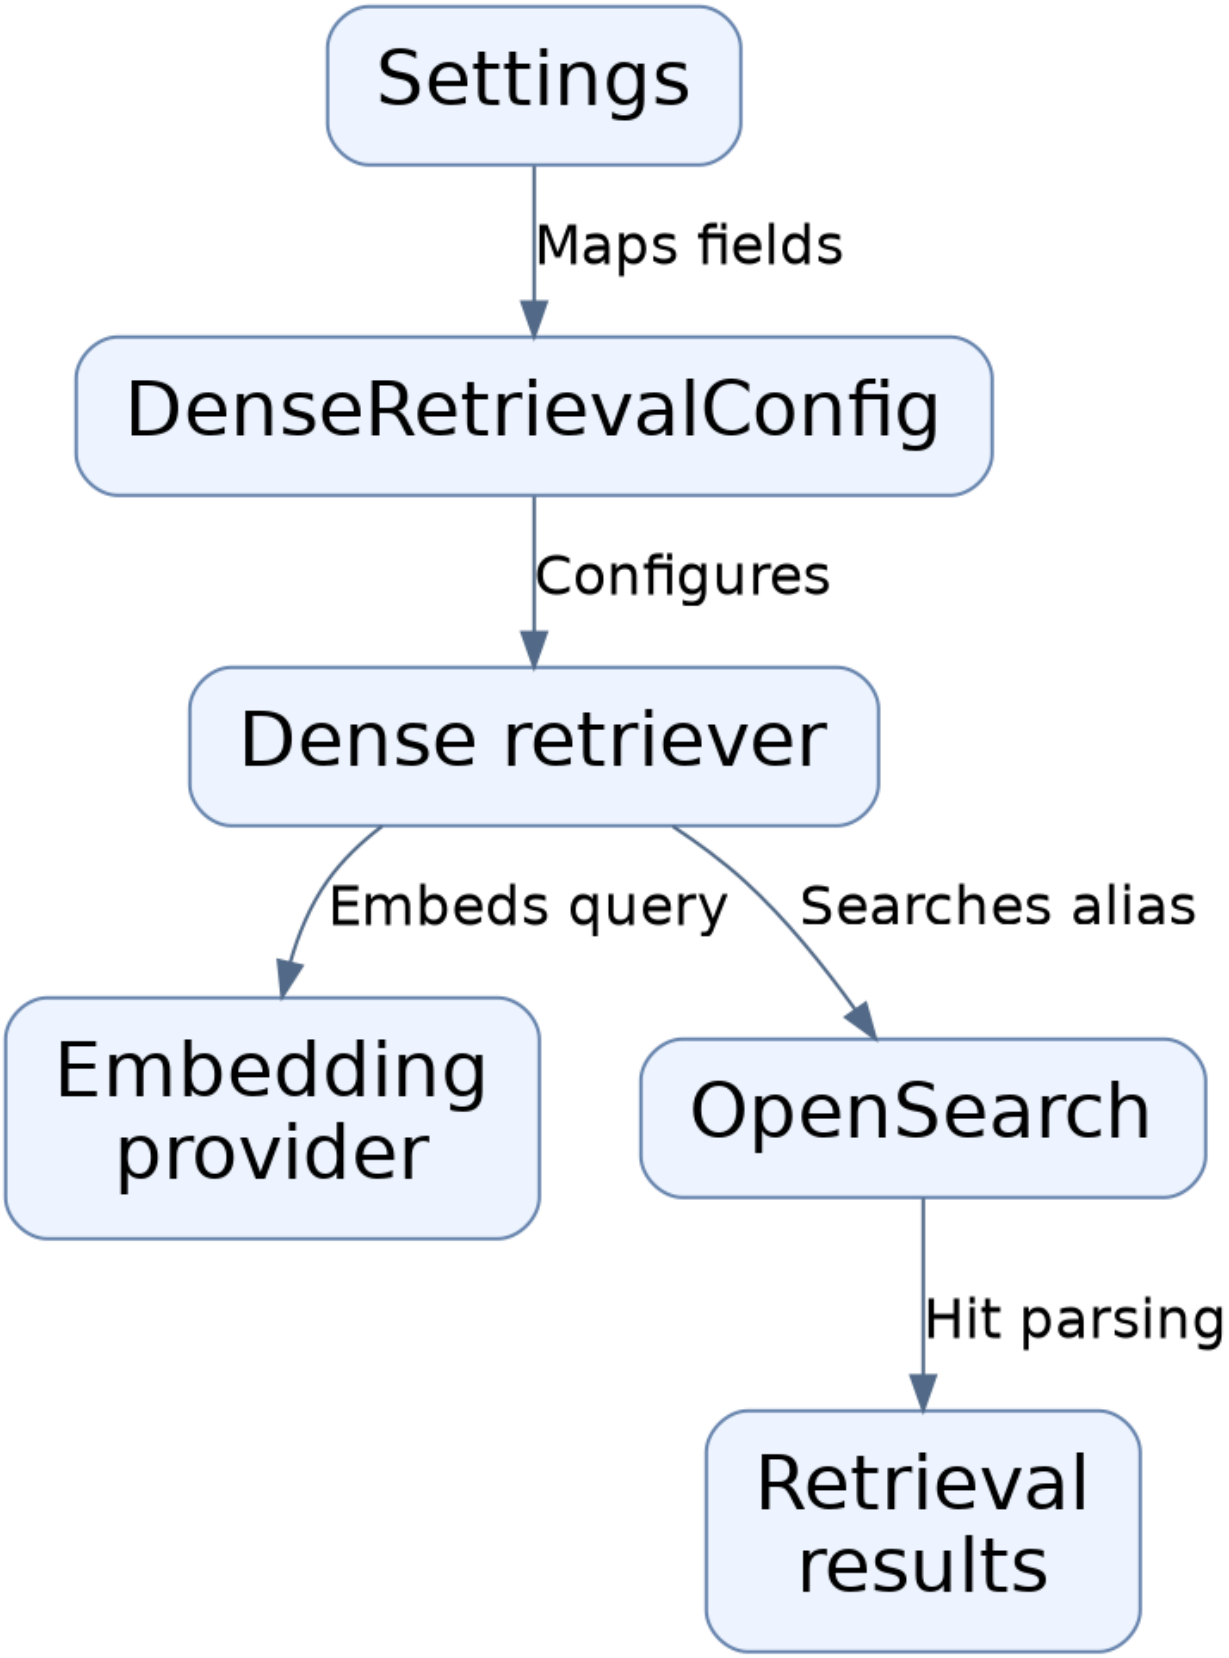

Query Execution Flow

A user query is normalized, validated, embedded, and issued as a k-NN search; empty queries short-circuit, and timings and traces are recorded.

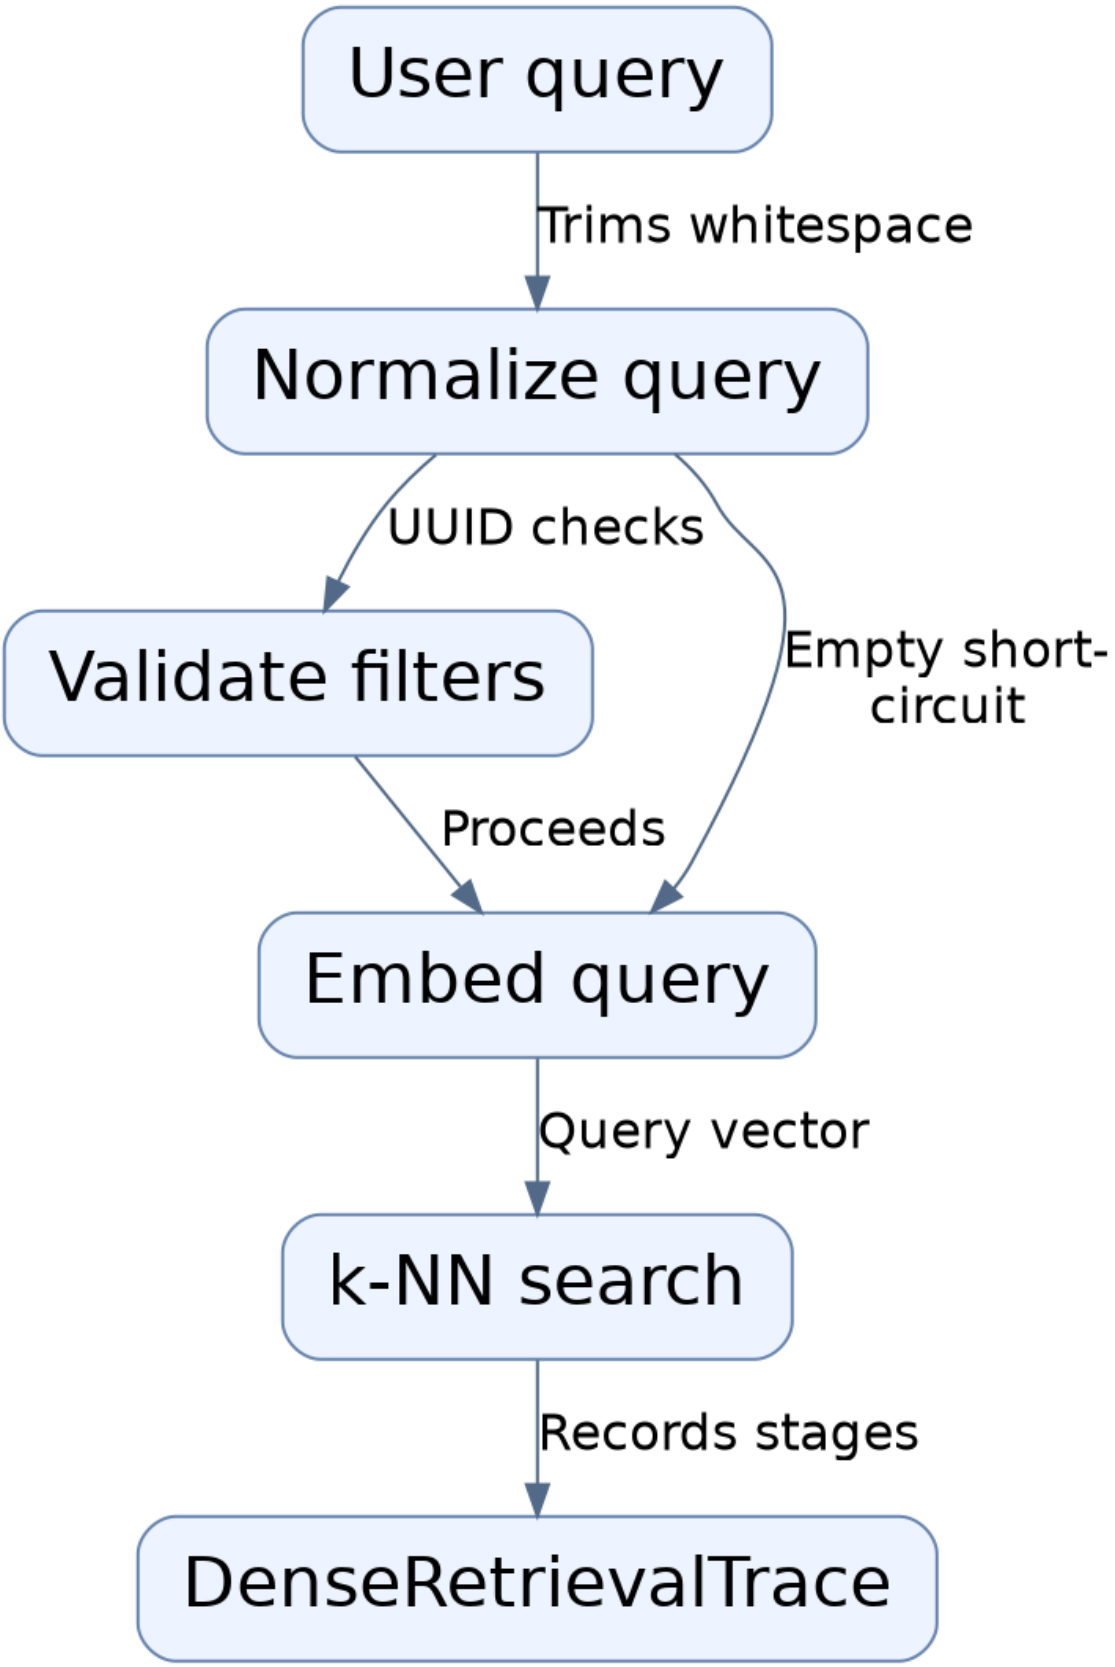

Debug CLI Flow

A command-line entry point parses arguments and runs the dense query with debug tracing, opening the configured embedding provider.

