

Architecture

Shared protocol contracts are implemented by both the opt-in Cohere live adapters and the deterministic fake family; usage/cost and ProviderError are cross-cutting. The configured_* factories are the boundary callers would use, but caller wiring is not evidenced.

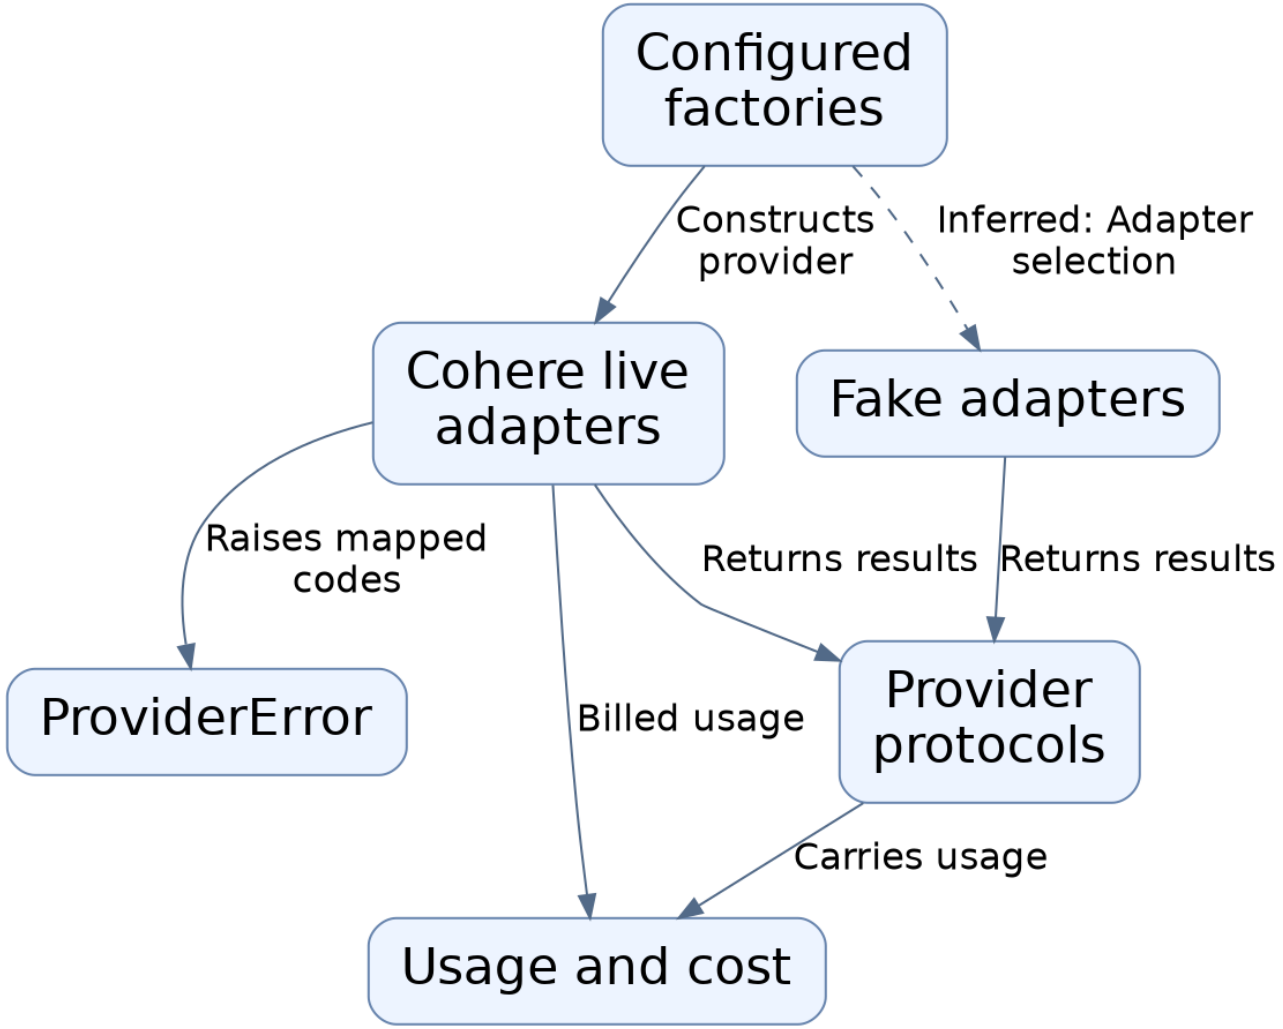


Chunk identity

ChunkingConfig normalizes into a canonical version digest, and chunk content plus canonicalized sorted source spans feed a content-addressed chunk_id; the boundary matters because identity is derived, never stored.

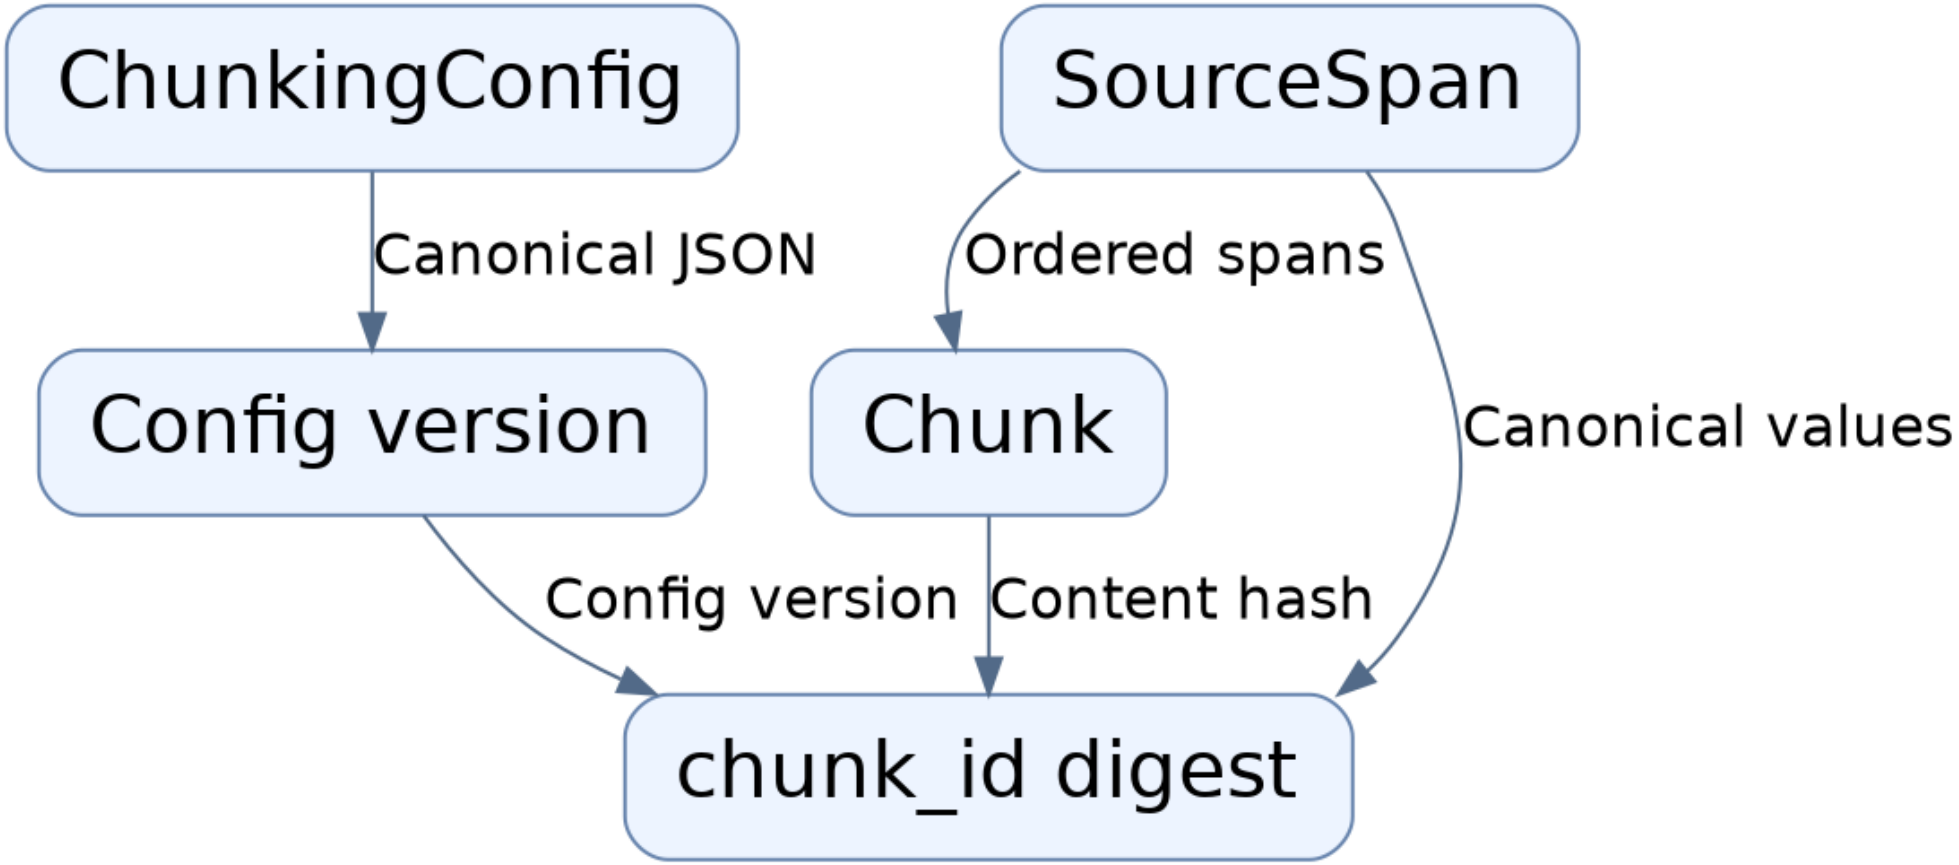


Generation request lifecycle

A validated GenerationRequest is sent as a non-streaming chat with a hard timeout and no SDK retries, then strictly parsed into a GenerationResult carrying Decimal cost and latency; failures become mapped ProviderErrors.

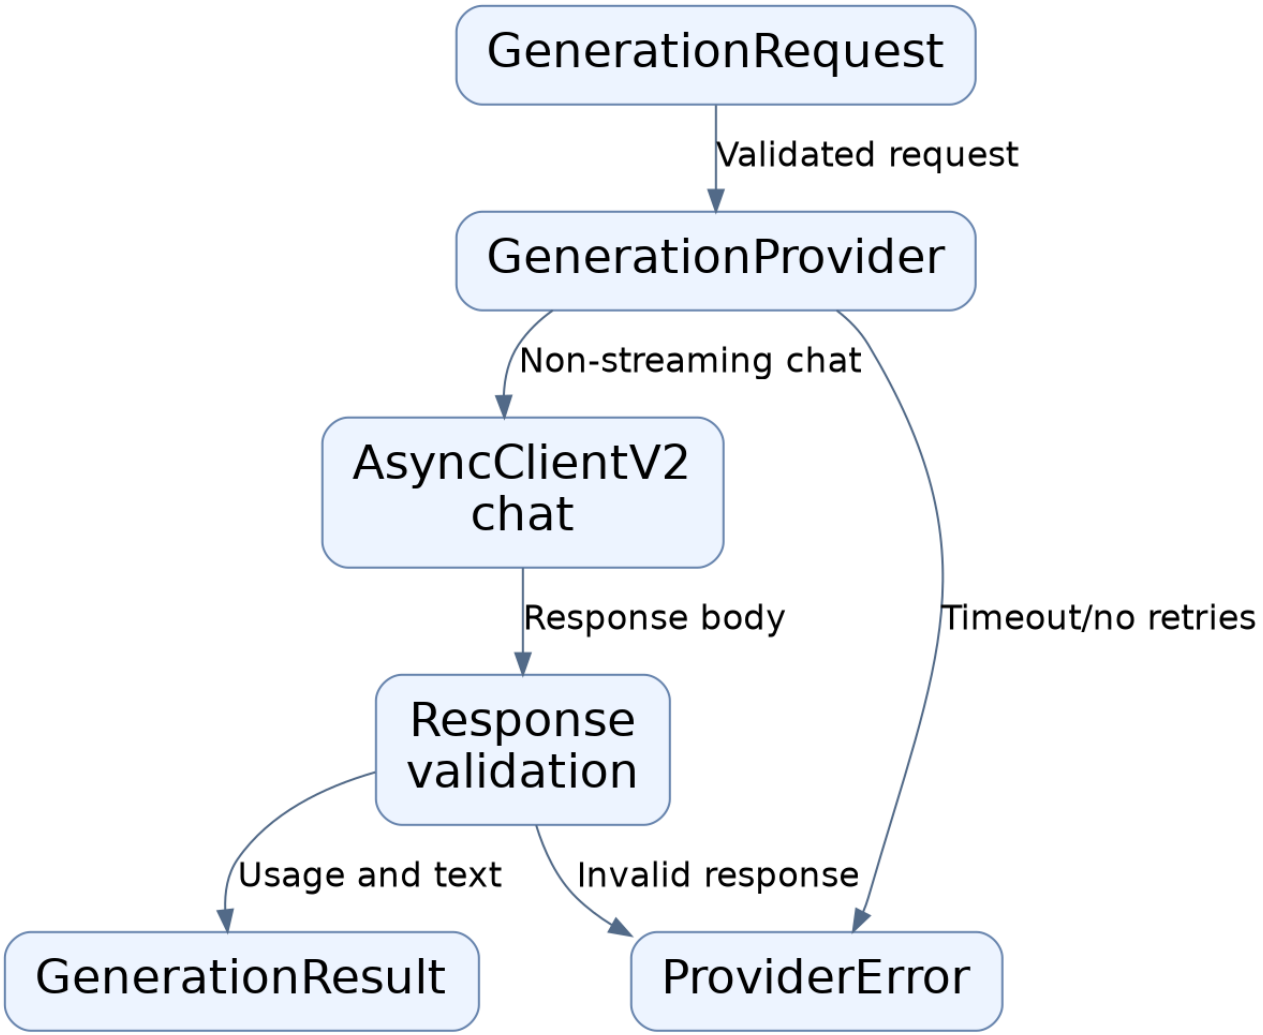

Reranking boundary

RerankRequest enforces unique candidate IDs and top_n bounds before any call; the Cohere adapter validates returned count, index uniqueness, and descending scores, mapping indexes back to candidate IDs with cost from billed search units.

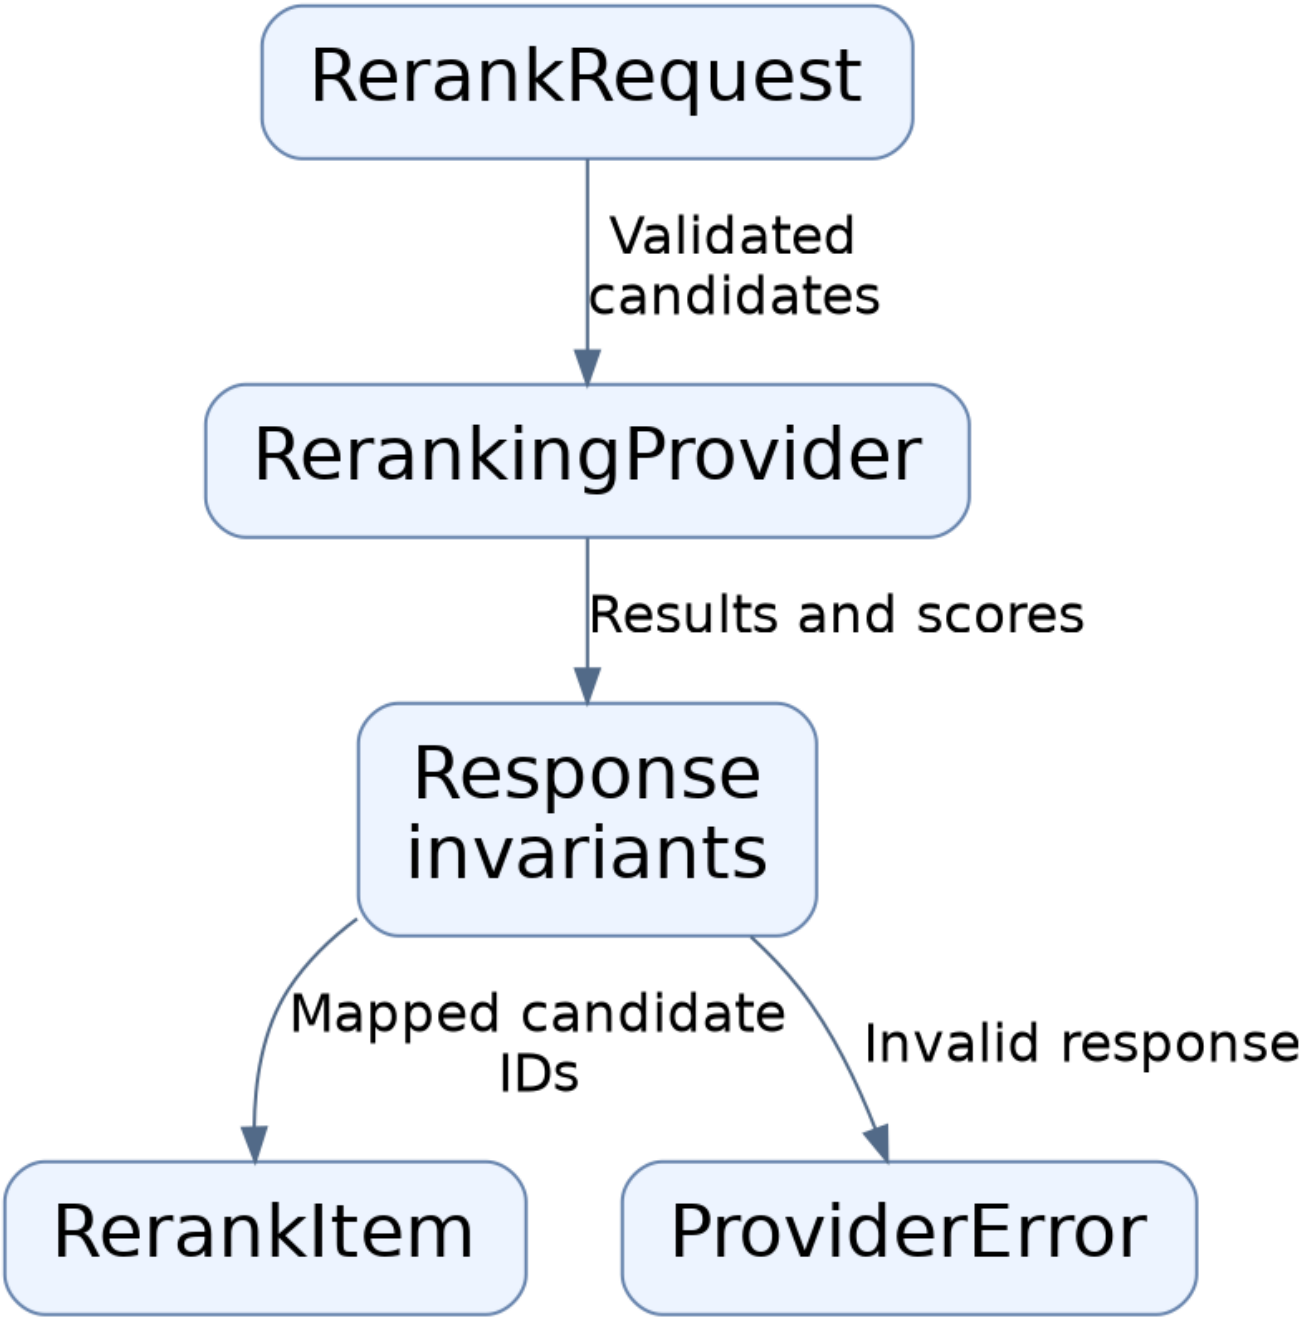

Tokenizer provisioning

Checksum-pinned tokenizer assets bind model, revision, and sha256; provisioning verifies existing files, atomically publishes fetched files, and rejects settings whose model is unsupported. TextTokenizer then defines the span boundary feeding chunking.

