

Architecture

The container runs the Next.js app; the App Router renders layout then static Home. Toolchain config types, lints, and tests but is not a runtime entry point. Backend linkage is unevidenced.

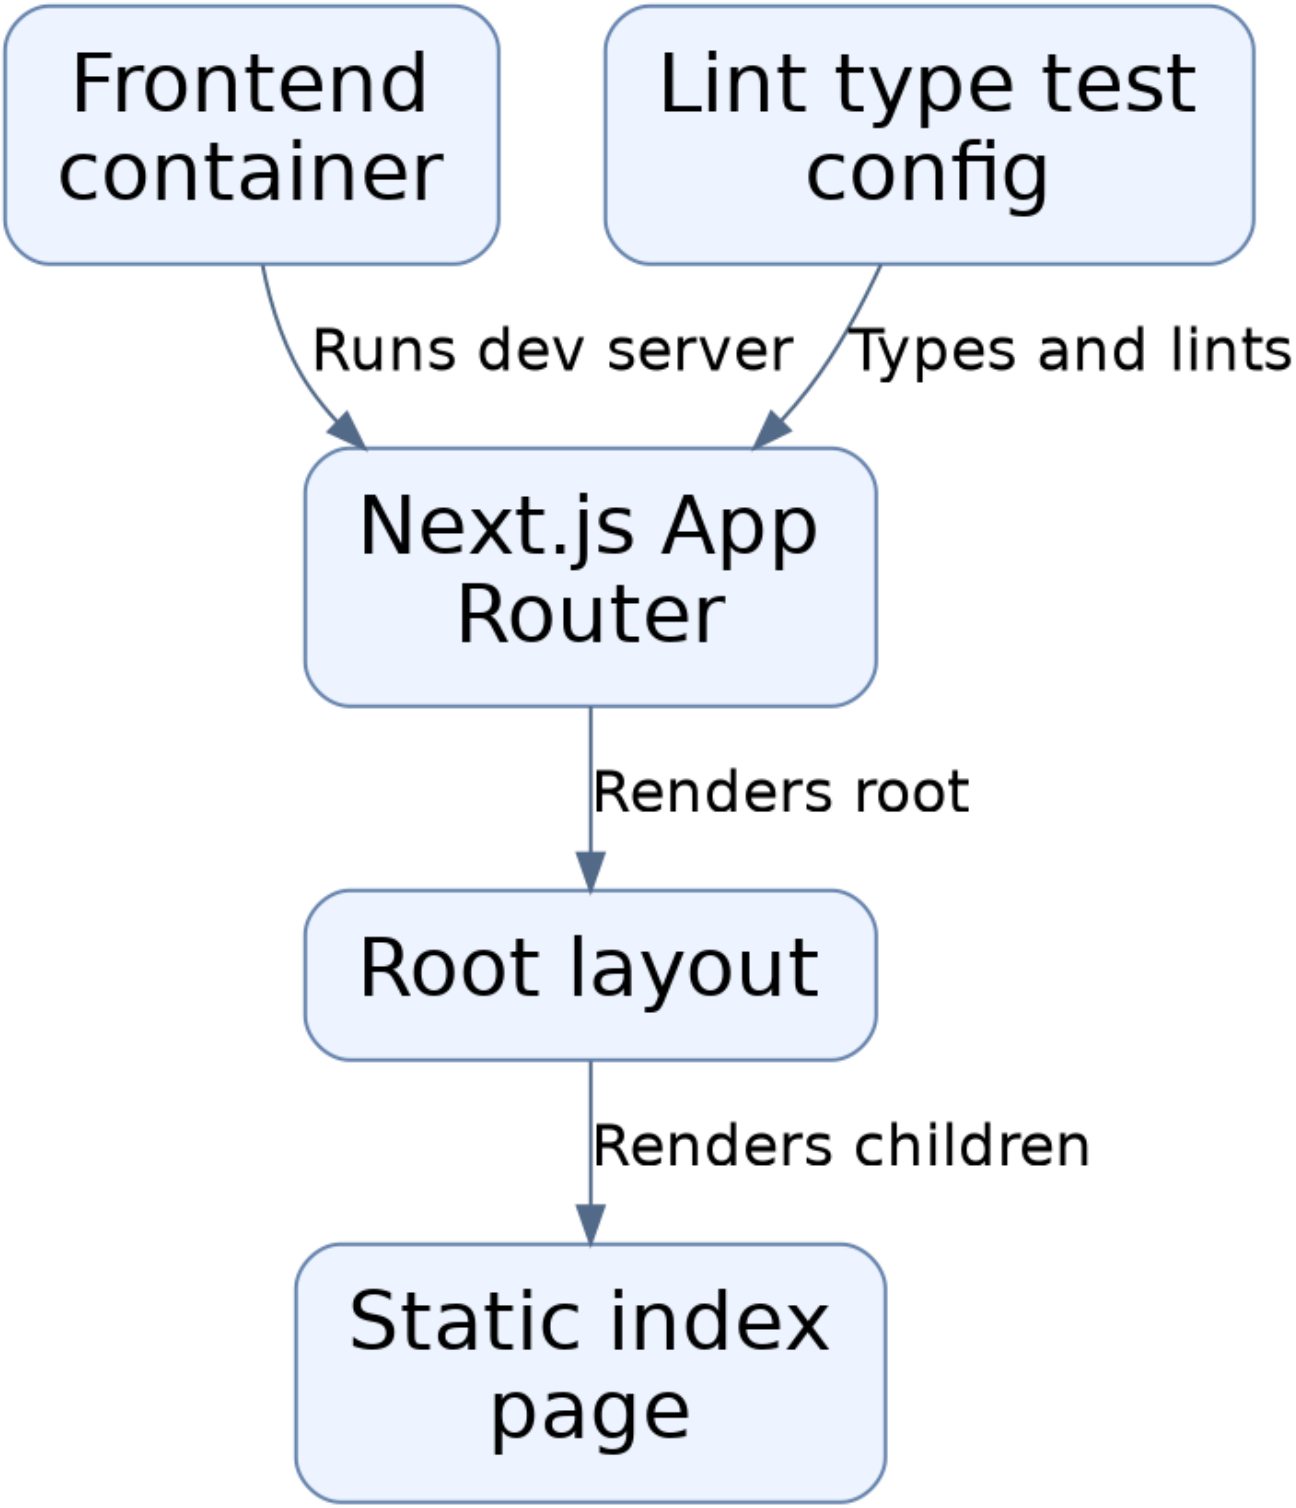

Page render flow

A viewer receives the layout shell, which imports styles, exports metadata, and wraps the static Home markup. This is the frontend's only observed user flow; no search interaction is wired.

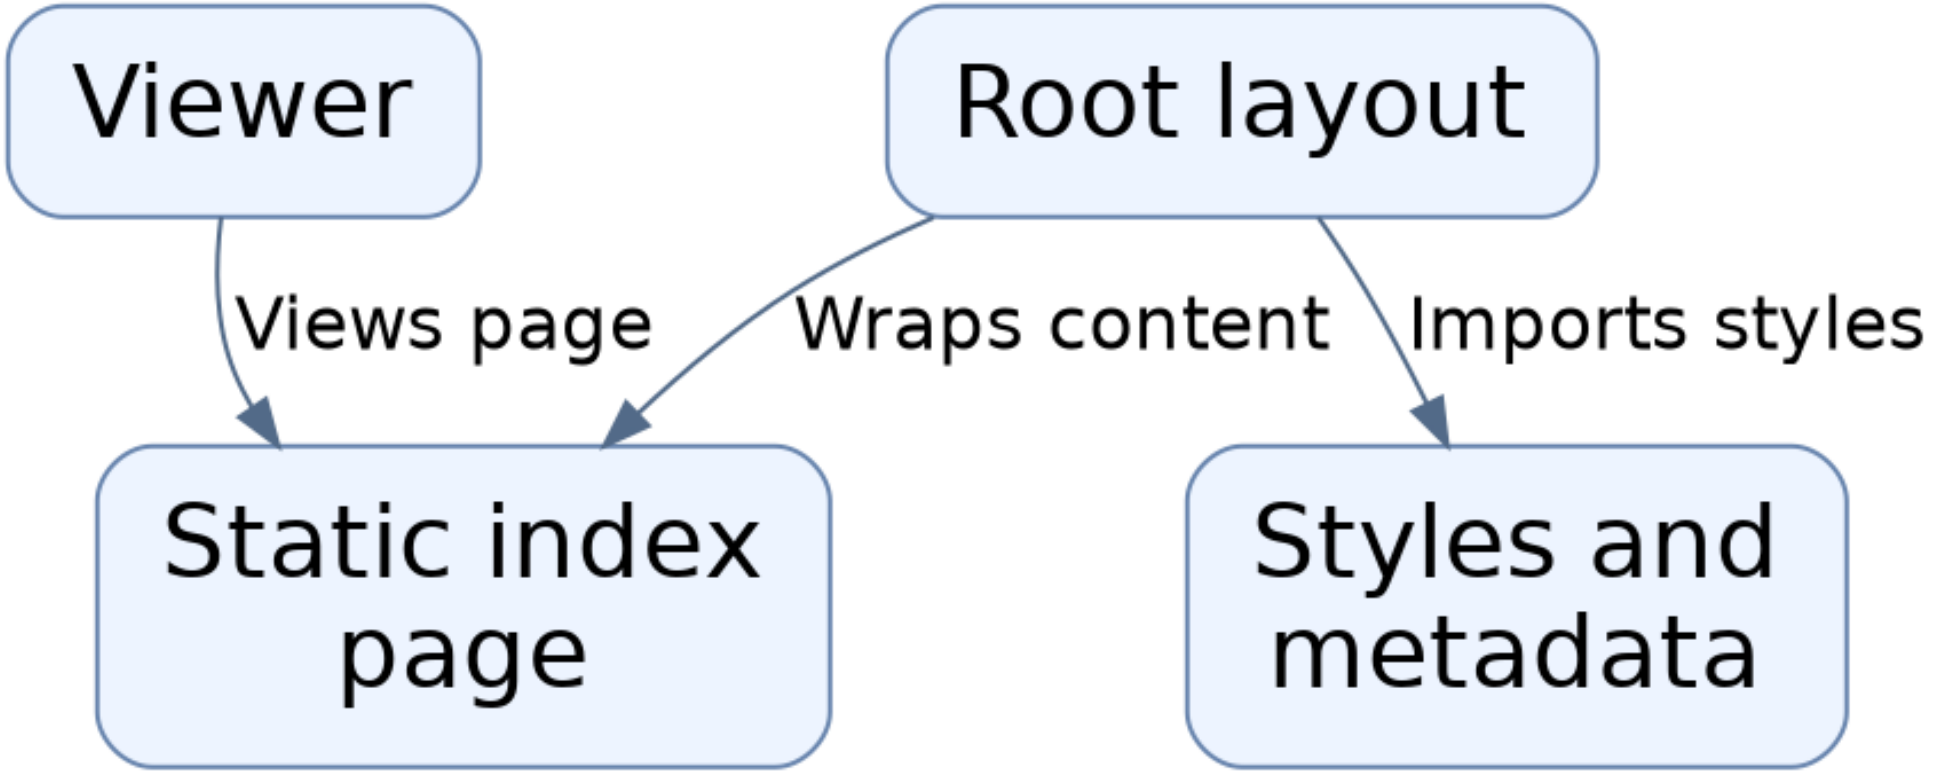

Toolchain boundary

Vitest with jsdom renders Home for the page test; ESLint and tsc validate sources. These dev-time tools are separate from the runtime entry points, which matters because passing here does not evidence backend wiring.

