

Architecture

The chunking package surface exposes the chunker, which reads parsed blocks and a tokenizer, produces enriched embedding text, and emits content-addressed Chunk contracts backed by identity and config digests.

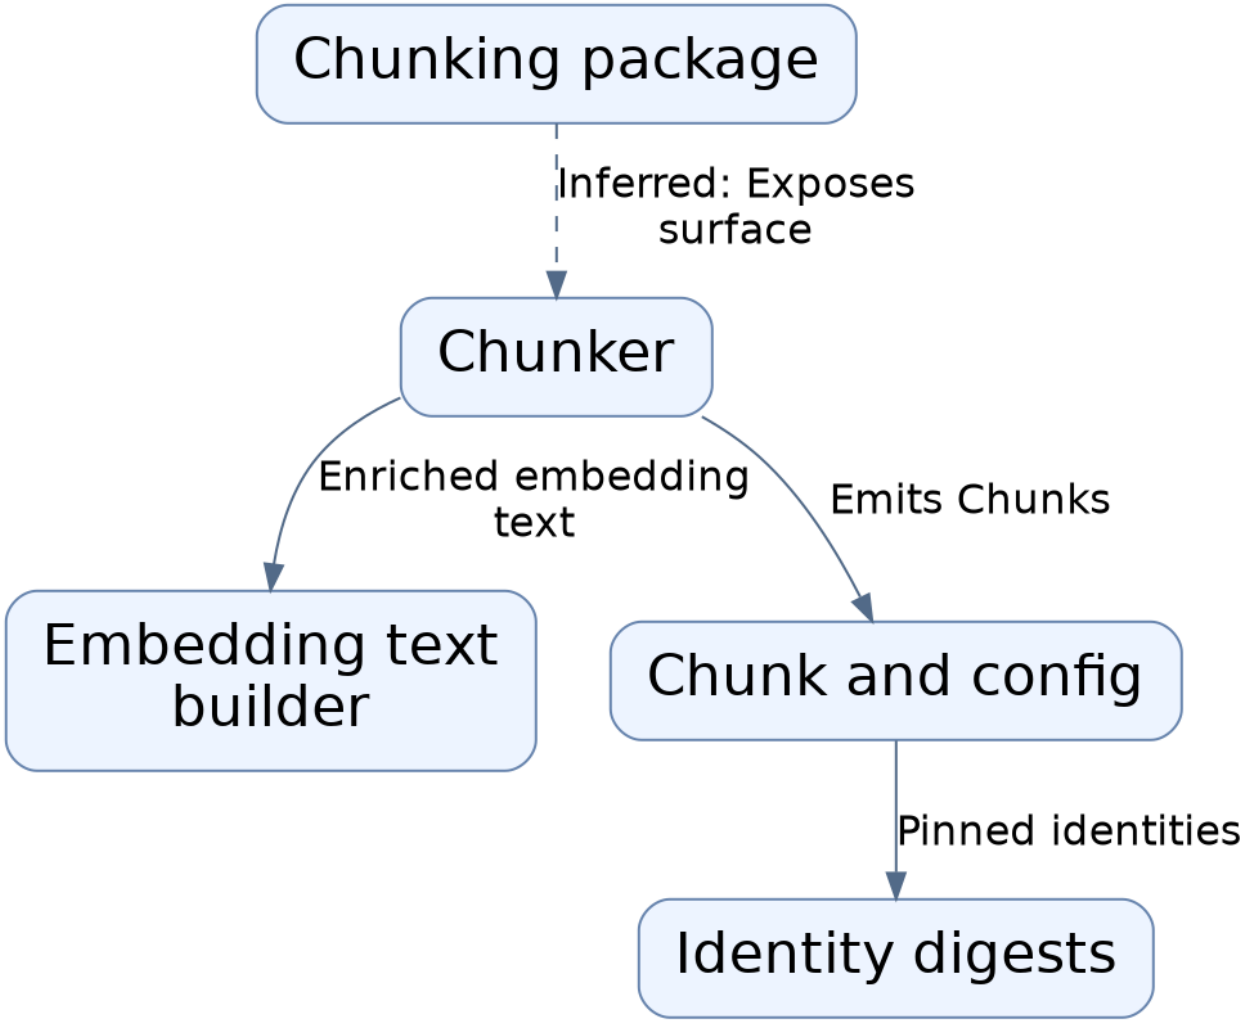


Section chunking boundary

Blocks are grouped by heading path so chunking operates per section, ensuring no chunk spans a heading boundary. The section boundary is the key isolation guarantee.

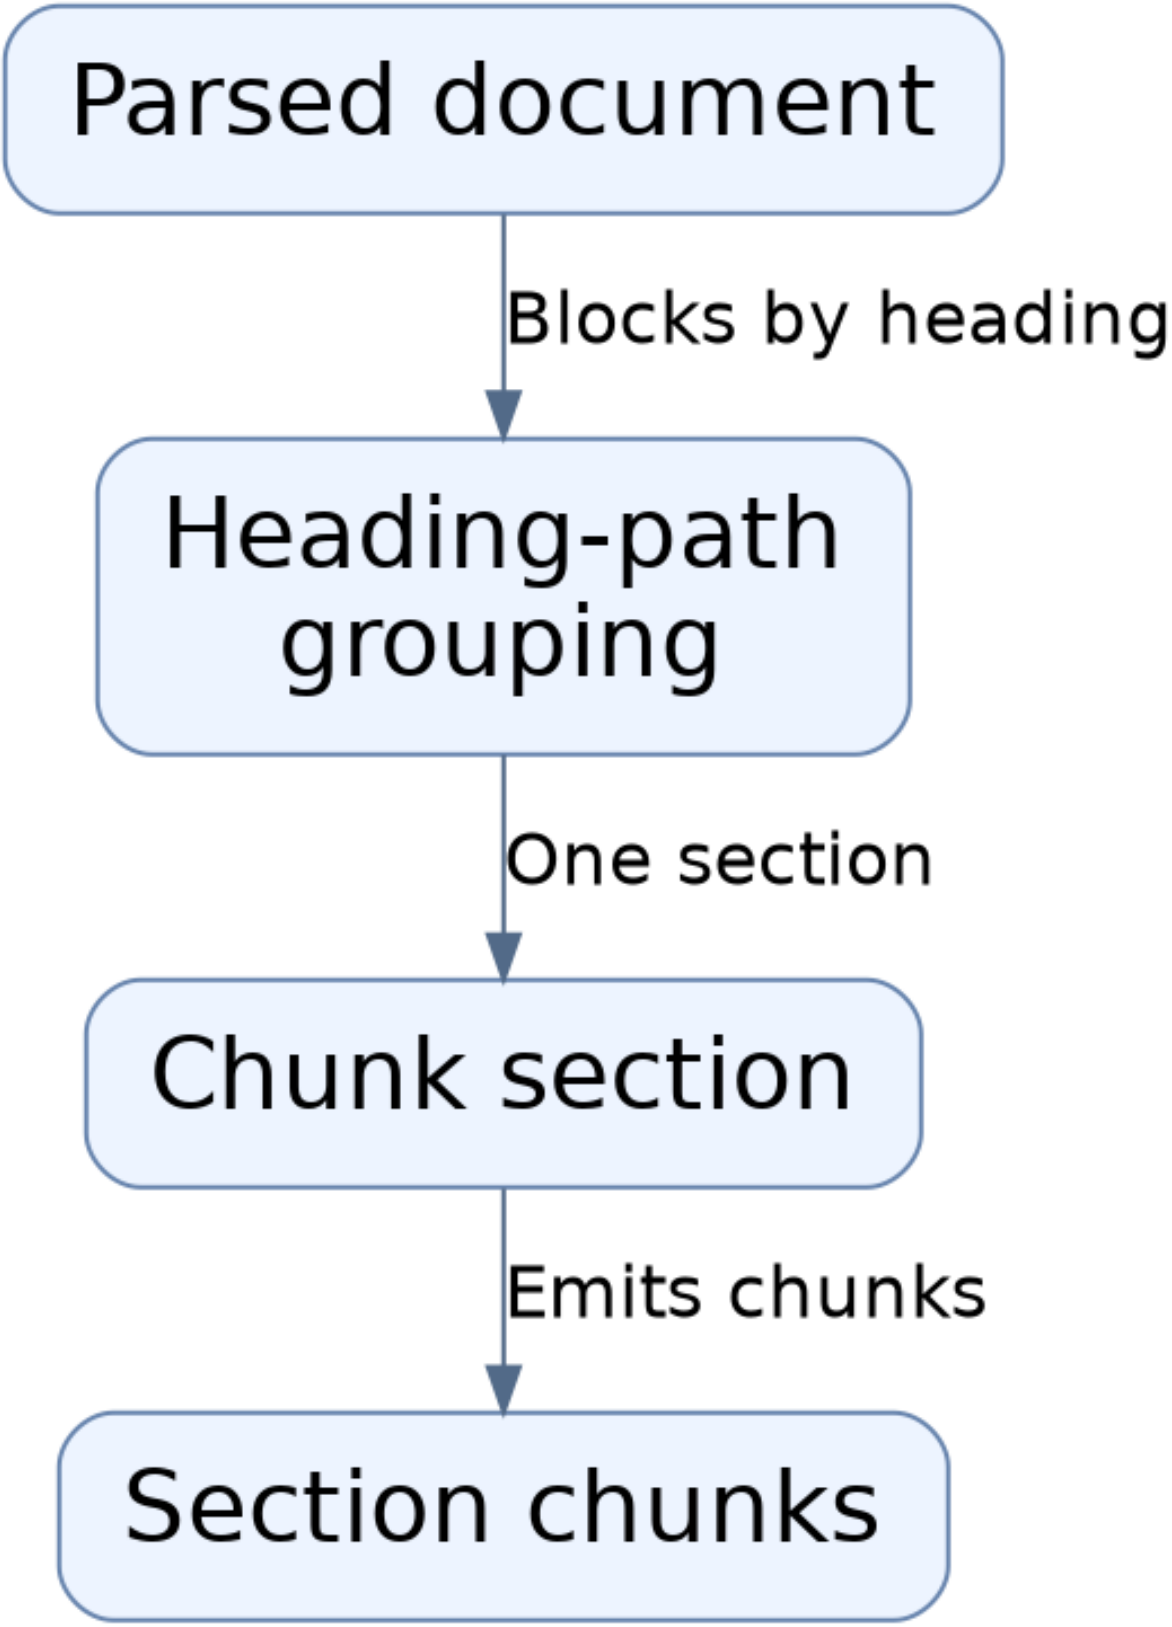

Greedy packing and splitting

Blocks accumulate while the candidate token count stays within the limit; oversized blocks are split by binary prefix search, and trailing overlap seeds the next candidate.

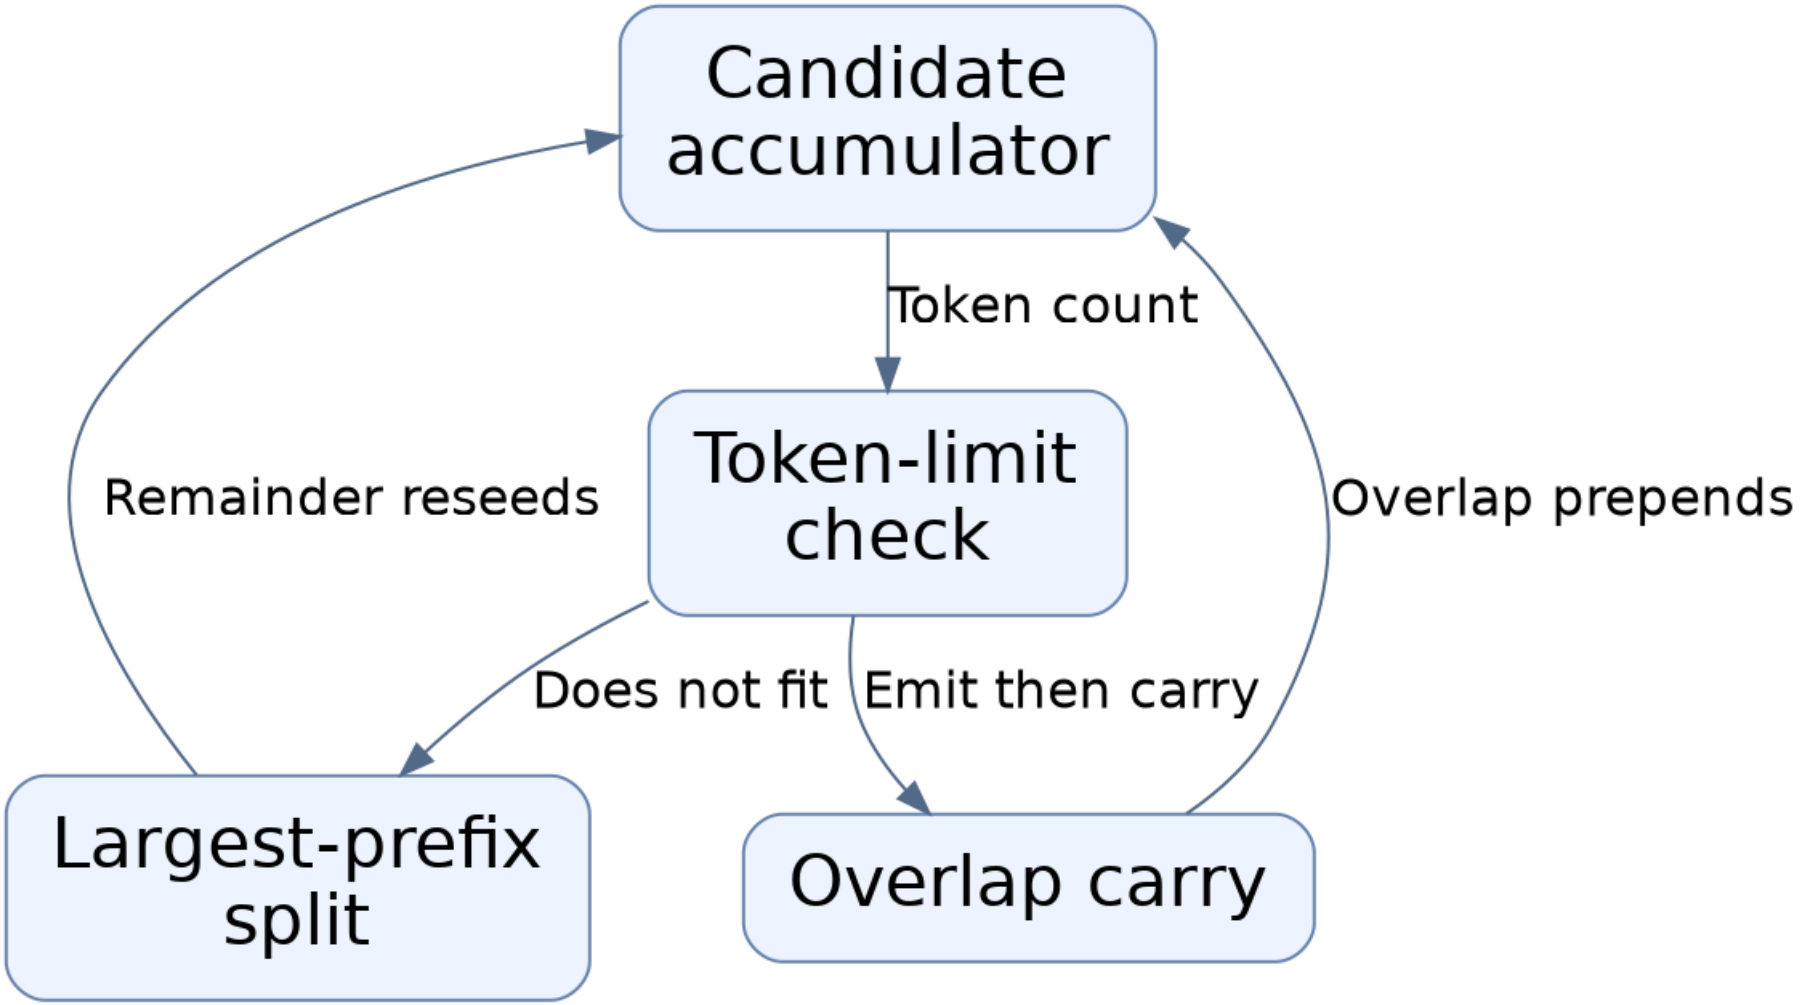

Config and identity derivation

ChunkingConfig validates limits and derives a deterministic version digest pinning the tokenizer; Chunk ids combine document id, config version, order, and canonical content.

