

Architecture

Settings feed a dense retrieval config; the retriever injects an embedding provider and queries OpenSearch through a read alias, emitting shared RetrievalResults while reusing lexical parsing for one result contract.

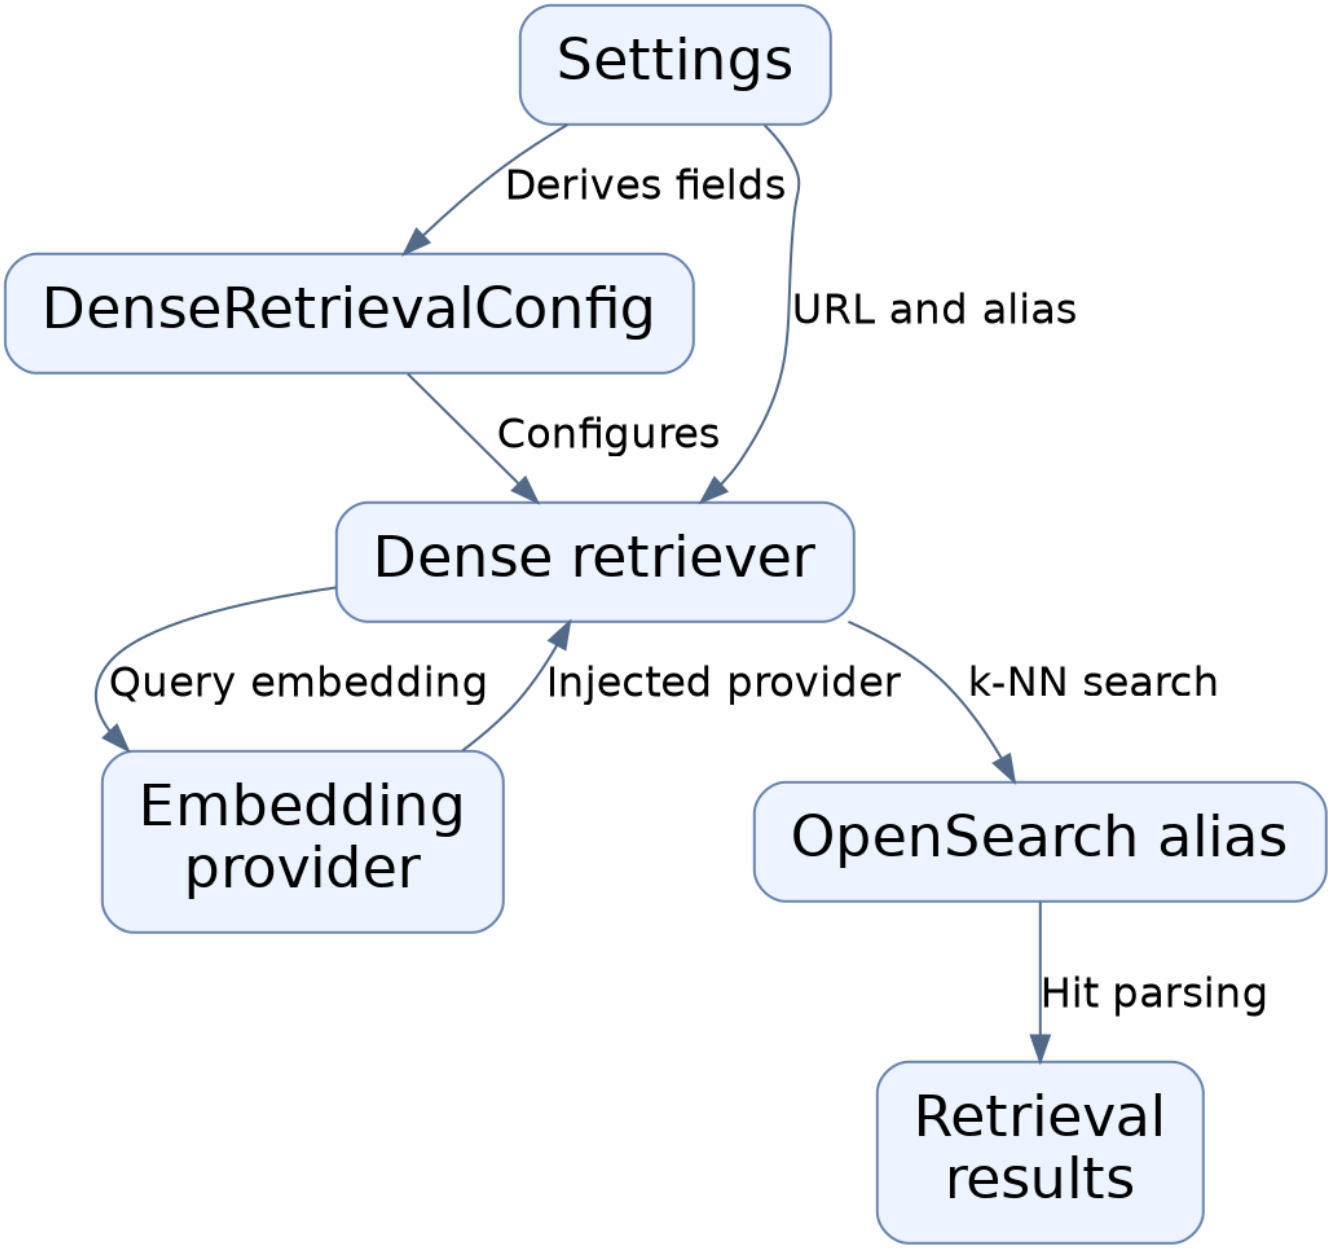

Request Lifecycle

A query is normalized, validated, embedded, and issued as a k-NN search; empty queries short-circuit before any external call, and stage timings plus diagnostics are recorded in the trace.

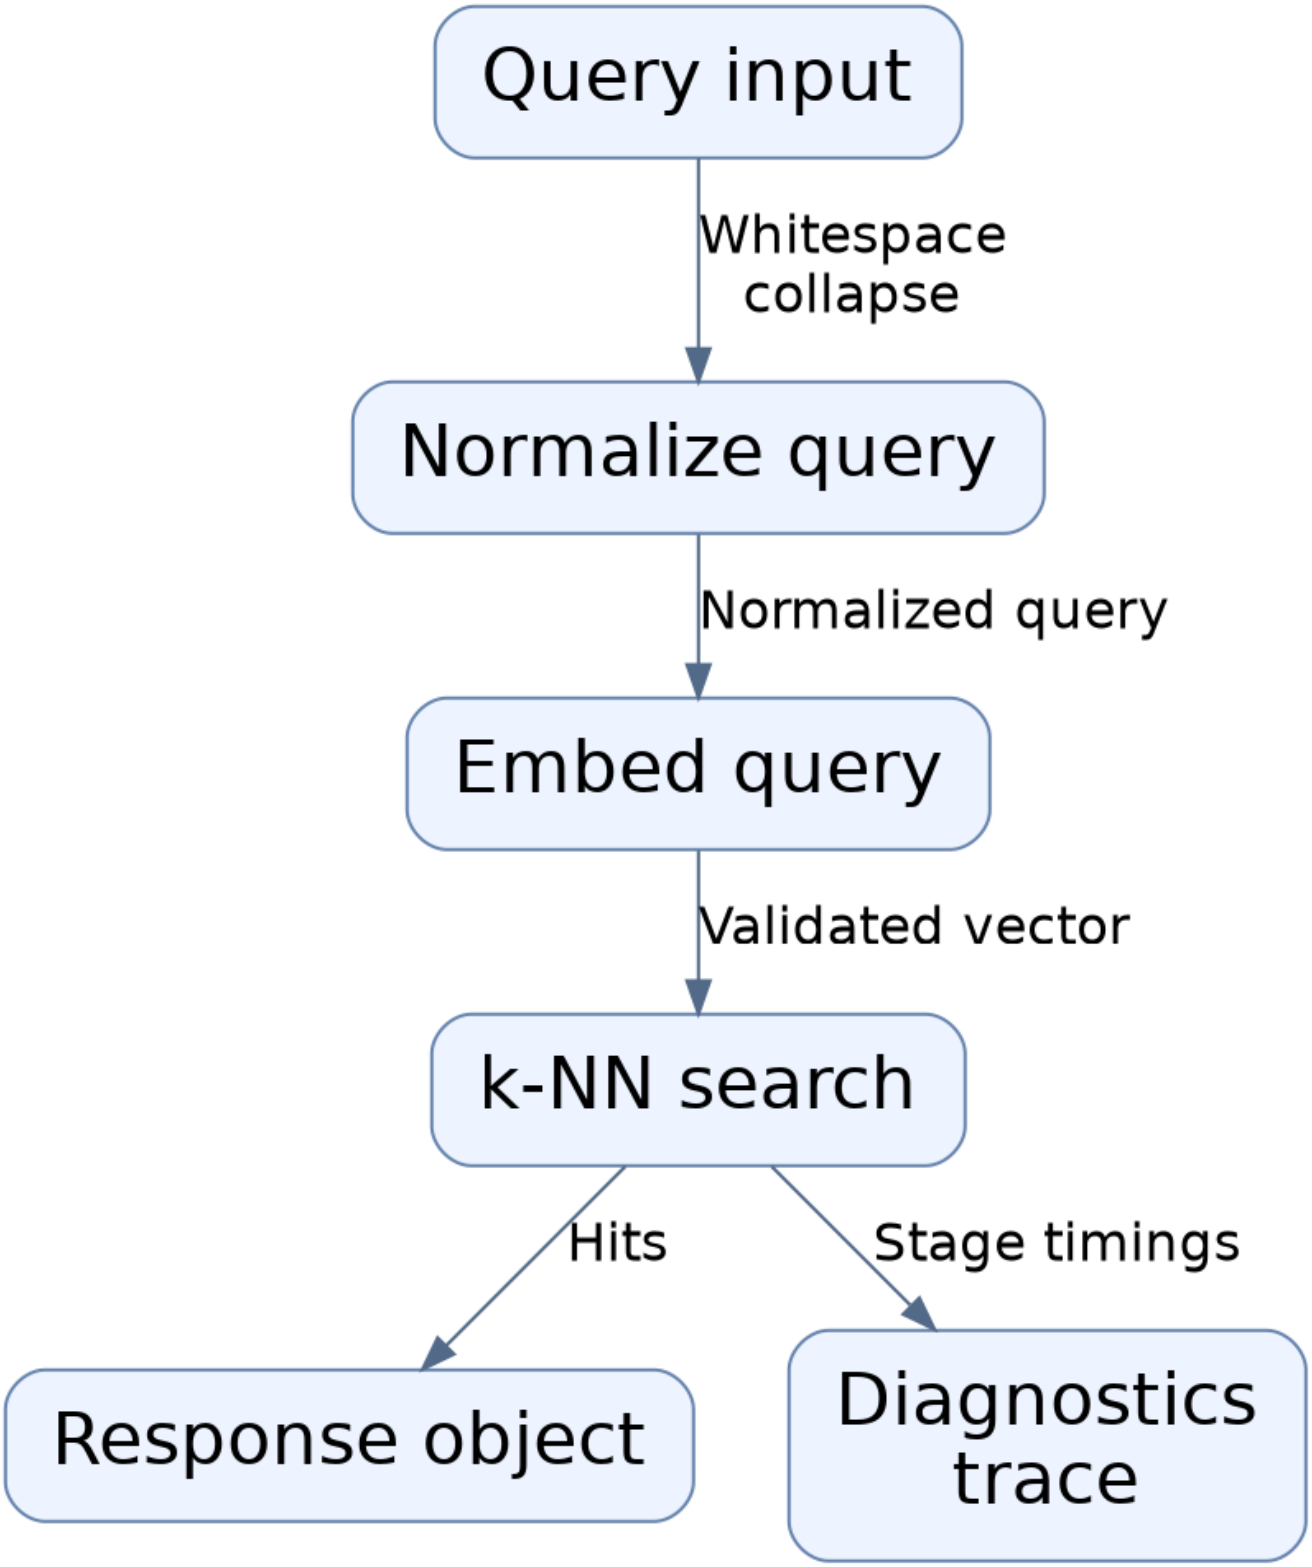

Debug CLI Entry

The only local entry point is a debug CLI that parses query, tenant, and optional collection/limit, opens the configured embedding provider, and builds the retriever from settings.

