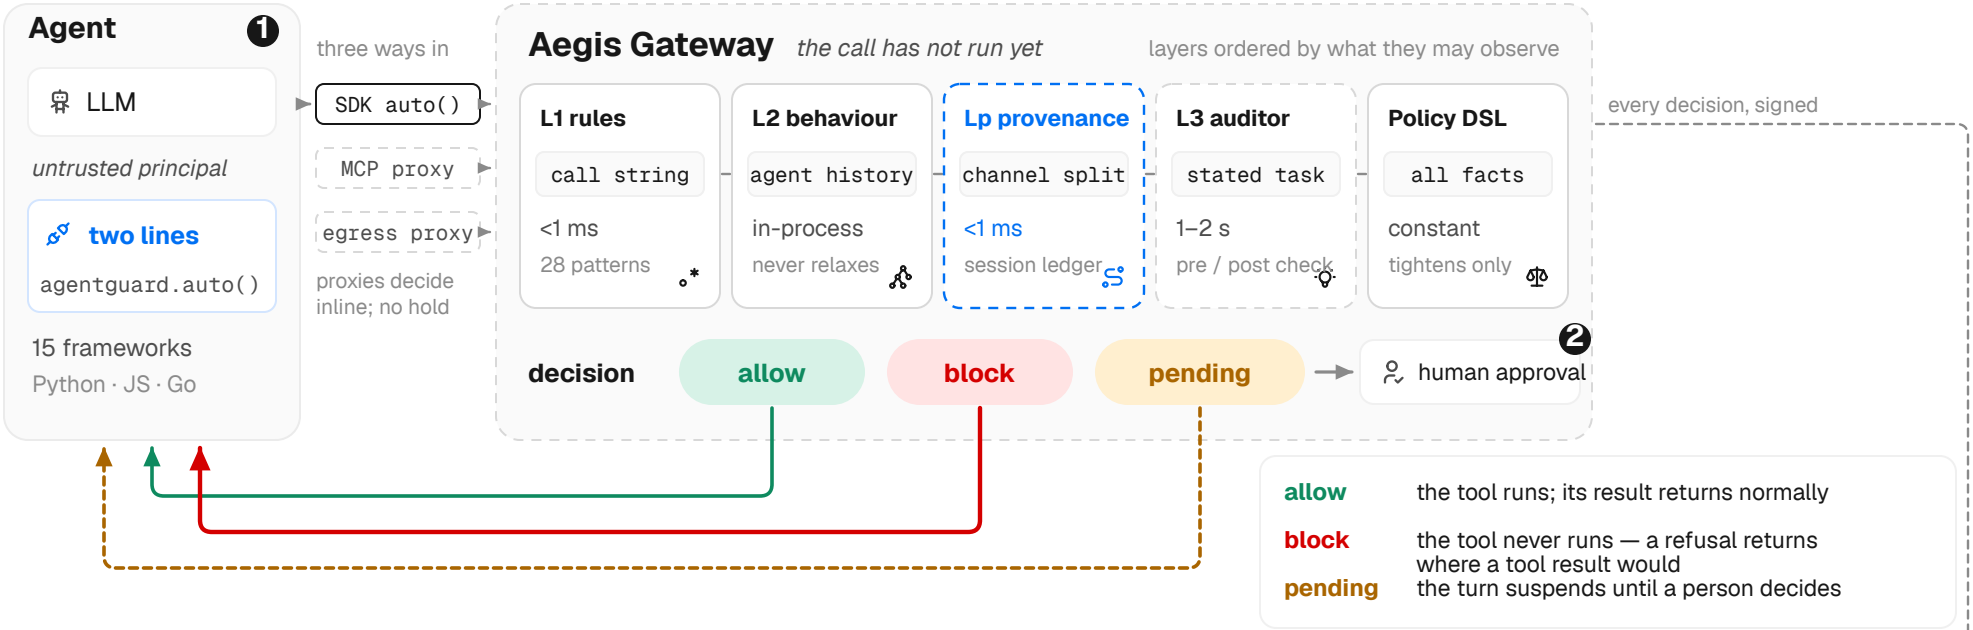


The refusal arrives in-band — which is why a blocked agent explains itself and continues the conversation instead of failing.

Behavioural monitoring

profile · sliding window
IForest · HST · Mahalanobis
ADWIN drift · conformal p-values

Containment & recovery

kill switch (violation count)
budget guard · effect outbox
snapshot → saga → rollback

Pre-deploy

repo scan · 53 OWASP rules
same policy packs, statically
code shield · scan diff

Connectors & fallback

SIEM · OTLP · webhooks · SSO
fail open | closed · disk queue
offline model · AEGIS_OFFLINE

Audit & integrity

3

Ed25519 per-agent signature
SHA-256 chain → Merkle → log
witnesses · offline verifier

Where an attendee acts: 1 drives the agent 2 approves or blocks a held call 3 tampers with the signed log, verification fails