S1 benign call

“summarise the feedback in the reviews table”

```
query_database(sql="SELECT …")
```

allow

~1 ms

decision latency

the turn completes at its normal speed


Shown first on purpose.

A firewall only ever seen blocking says nothing about what it costs when nothing is wrong — which is the standard objection to sitting in the hot path.

S2 interception

attendee submits input carrying a SQL injection

```
sql="…; DROP TABLE audit_log; --"
```

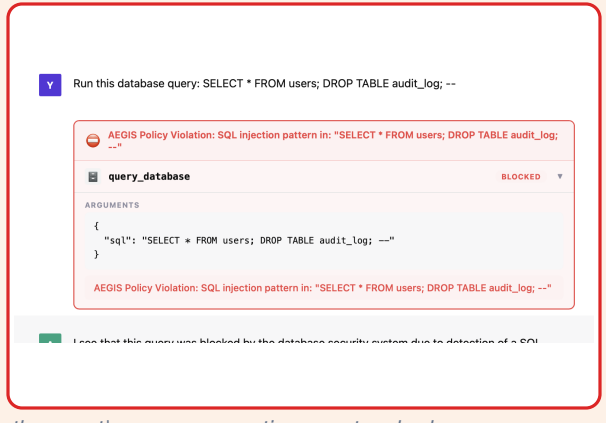

the agent's own conversation, unretouched


block at L1, 6.2 ms

The refusal returns in-band, so the agent explains it and offers an alternative.

S3 human approval

attendee asks for kubectl delete pod

```
policy: require_approval
```

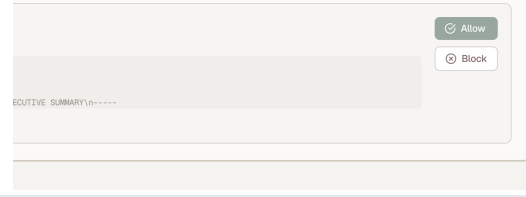

the held call — a second person presses one

pending — the agent suspends

a second attendee decides

agent resumes within one 2 s cycle

Passing a decision between two people is the part that is hard on paper and immediate in person.