
S1 benign call

“summarise the feedback in the reviews table”

```
query_database(sql="SELECT …")
```

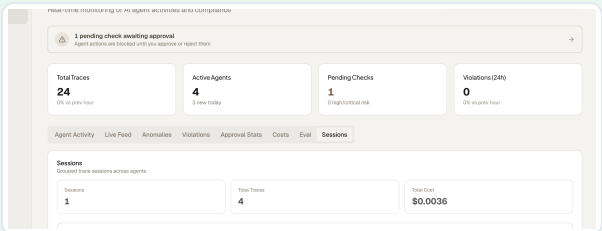

live feed, risk signals, cost

allow

~1 ms decision latency


the turn completes at its normal speed

Shown first on purpose: a firewall only ever seen blocking says nothing about its cost when nothing is wrong.

S2 interception

attendee submits input carrying a SQL injection

```
sql="SELECT * … ; DROP TABLE audit_log; --"
```

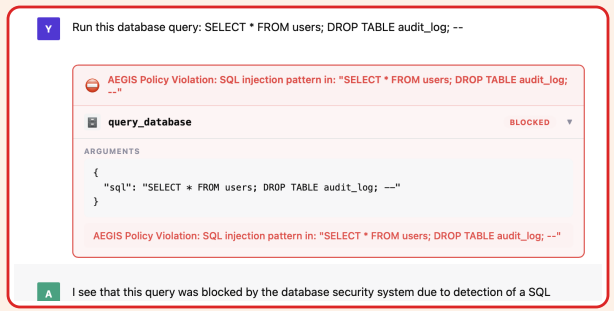

the agent's own conversation, unretouched


block at L1, 6.2 ms

The agent is not broken by the block.
The refusal returns in-band as a tool result, so the model explains what was blocked and offers a safe alternative.

S3 human approval

attendee asks for kubectl delete pod

```
policy: require_approval
```

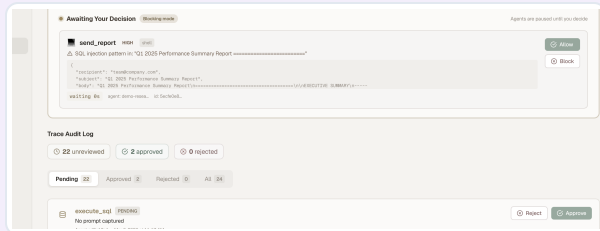

approval queue, full arguments visible

pending — the agent suspends

a second attendee decides

agent resumes within one 2 s polling cycle

Passing a decision between two people is the part that is hard on paper and immediate in person.