

The Augustine Problem in Agents

Anonymous Authors
Anonymous Institutions

Abstract

LLM agents are trained on tokens and deployed in wall-clock time. They cannot perceive the wall-clock. The *Chronoception Impossibility Theorem* (CIT) makes the claim precise: under any token-only loss, the gradient carries no signal aligning τ_{wall} with any internal representation. The *Three Times* ontology — τ_{wall} , τ_{step} , τ_{self} — names the projections a policy must align; the *Augustine Problem* is that alignment failure.

CHRONOBENCH (9 sub-capabilities $\times$ 14 agents $\times$ 2 settings, $\sim$ 5,900 trajectories) measures the failure. Five findings. **(i)** Every agent honours $< 5\%$ of its wall-clock budget; date injection does not move CAR ($|\Delta\text{CAR}| \leq 0.01$). **(ii)** $|\rho|$ falls 94% across five non-reasoning generations while CAR does not: narrative axis is text-trainable, action axis is not. **(iii)** The *Reverse-Scaling Theorem*: reasoning-token expansion monotonically grows $|\rho|$ under CIT. Confirmed four ways — intra-model (o4-mini effort ladder: $|\rho| = 1.23 \rightarrow 1.54 \rightarrow 1.67$), cross-model (Sonnet 4.6 $\pm$ thinking: sign flip $+0.07 \rightarrow -0.22$, CI $[-0.30, -0.10]$), within-model (prospective $+0.22$ vs. retrospective -0.22 on the same Sonnet-thinking configuration), and cross-vendor (GLM-5.2 sign flip $+0.16 \rightarrow -0.29$ from Setting A to Setting B, independent training pipeline). **(iv)** The *Calibration Catastrophe*: nominal 90% CIs achieve $\leq 50\%$ coverage panel-wide; GPT-4o 0%. **(v)** The *Injection Tell*: 3/3 consumer web-chat products inject the date; 0/3 developer tools do — three labs converging on the same workaround independently.

Aggregated as ε , no agent crosses the Augustine threshold $\varepsilon^* = 0.20$; the action axis alone exceeds it. Under the *Agentic Timeline Hypothesis* the deployment horizon scales as $T_{\text{max}} \propto 1/\varepsilon$; pre-registered P12 is qualitatively supported on 14,709 METR HCAST runs (reasoning models decay 20% faster). The framework generalises to a *Spatiotemporal Impossibility Theorem* (SIT) and the *Agentic Frontier* bound $T_{\text{max}} \cdot S_{\text{max}} \leq C/\varepsilon_{ST}$ — the bridge to Paper 3. Code, trajectories, Docker container, and locked OSF pre-registration released.

1 Introduction

A frontier reasoning model, asked how long the next task will take, predicts “15 seconds.” It thinks for ninety. It answers in two. Pressed afterwards on the duration, the same model reports “0.04 seconds.” Pressed for a 90% confidence interval, the interval contains the truth 0% of the time. None of these failures is a bug or a misread of a particular prompt. They are joint, panel-wide, and structurally predictable. We measure them across fourteen agent configurations from seven providers and roughly 5,900 trajectories; the joint occurrence is present in every model we tested.

The Augustine Problem. The five training losses in current practice — next-token cross-entropy, supervised fine-tuning, RLHF, RL with verifiable rewards, reasoning supervision — are all functionals of token sequences. None of them contains wall-clock time in its support. Yet the same models are deployed as agents that act in continuous physical time, where budgets are measured in seconds and consequences unfold without regard to step count. We call the resulting representational gap *the Augustine Problem*, after Augustine’s confession that he knew what time was until

asked to explain it.¹ The gap is structural, not engineering: we prove (Theorem 1) that under any token-only loss the policy gradient contains no signal aligning the wall-clock with any internal representation. Chronoception cannot be acquired from token-only training. It must be installed.

Three Times. Any agent trajectory admits three ontologically distinct projections of time: wall-clock time τ_{wall} (continuous, external), step time τ_{step} (discrete, the policy’s invocation count), and self-narrated time τ_{self} (the agent’s report of its own duration). A chronoceptively grounded policy enforces the implicit identity $\tau_{\text{wall}} \approx \tau_{\text{step}} \cdot \langle \Delta t \rangle \approx \tau_{\text{self}}$. The Augustine Problem is precisely the failure of a policy to enforce this identity — a property measurable on single-turn tasks, before any long-horizon dynamics can compound.

What goes wrong, and how. Three named empirical laws structure the panel’s behaviour. *L1 Agentic Parkinson’s Law* (coefficient α): budget-aware-trained agents fill the wall-clock budget they are given; native untrained agents do not. *L2 Step-Clock Conflation* (Clock-Adherence Ratio CAR): under wall-clock budgets, every panel agent uses less than 5% of the budget — agents silently degrade wall-clock budgets into step-count terminators. *L3 Temporal Confabulation* (ratio $\rho = \log_{10}(\tau_{\text{self}}/\tau_{\text{wall}})$): agents misreport the duration of their own work, with rich internal structure detailed in §6. The three laws aggregate into a single scalar ε .

Five findings, one consequence. (i) Every panel agent honors less than 5% of the wall-clock budget given to it; date injection does not move the number. (ii) Self-narration error closes along the non-reasoning capability axis ($|\rho|$ falls 94% across five frontier generations) but CAR does not. The narrative axis is text-trainable; the action axis is not. (iii) The Reverse-Scaling Theorem (Theorem 2): reasoning-token expansion monotonically grows $|\rho|$ within a fixed agent. The frontier strategy currently driving capability scaling — longer chains of thought, larger thinking budgets, more test-time compute — structurally degrades chronoception on the narrative axis. We confirm the theorem intra-model and cross-model, with sign-flipping under extended thinking. (iv) The Calibration Catastrophe: every panel agent’s nominally 90% interval on self-duration achieves at most 50% coverage; GPT-4o achieves zero. (v) The Injection Tell: consumer web-chat products inject today’s date into their system prompts at 100% rate; developer-tool products at 0%. Competing labs converge on the same workaround independently, with substantial commercial incentive to ship a cheaper alternative if one existed. We argue this is decisive non-experimental evidence that the underlying foundation models lack a representation of time.

The five findings are not five surprises. They are projections of one structural fact: the action axis cannot be closed by narrative training, and reasoning-token expansion makes the narrative axis worse, not better. The Augustine Threshold $\varepsilon^* = 0.20$ (calibrated at $2\times$ human introspective error) is crossed by no panel agent. Sonnet 4.6 — the best chronoceptive agent we measured — sits at $\varepsilon = 0.32$, with the action axis alone contributing 0.32. There is no narrative-axis intervention that closes the gap.

From measurement to deployment. Why does any of this matter? Industry is moving from minute-scale chat to hour-scale coding agents to day-scale autonomous research agents. At each new horizon a tighter chronoceptive calibration is required to honour budgets, plan against deadlines, and report progress. The Agentic Timeline Hypothesis (§9) makes this precise: each agent has a

¹We use *chronoception* in the cognitive-science sense [Wittmann, 2009, Eagleman, 2008]: the perception of one’s own work duration. This is distinct from Goel et al. [2025]’s use of the same term for the temporal validity of facts in retrieval-augmented generation.

maximum viable deployment horizon $T_{\max}(A)$ that scales as $1/\varepsilon(A)$, modulated by CAR. Because L2 does not scale with capability and the Reverse-Scaling Theorem makes the narrative axis worse with reasoning compute, $T_{\max}$ scales with neither. The autonomous-agent timeline is bounded by chronoception, not by intelligence. Pre-registered prediction P12 is qualitatively supported on 14,709 public METR HCAST runs: reasoning models decay 20% faster than non-reasoning models at matched short-horizon success.

From time to space. The framework develops along one axis. But every long-horizon agent benchmark on which deployment claims are made — SWE-Bench, WebArena, GAIA, MLE-Bench — requires the agent to navigate space as well as time: a codebase, a website, the open web. The argument that produces CIT goes through unchanged on any external metric the loss does not see. The spatial face of the Augustine Problem is the *Cartographic Problem*, formalised in §12 as Theorem 3 (the Spatiotemporal Impossibility Theorem) with three spatial laws (SL1/SL2/SL3) mirroring L1/L2/L3. The temporal Agentic Timeline becomes the joint Agentic Frontier $T_{\max}(A) \cdot S_{\max}(A) \leq C/\varepsilon_{ST}(A)$. The framework’s structural claim is that the autonomous-agent capability curve saturates not because intelligence saturates, but because spatiotemporal cognition does not scale. This is the bridge to a planned Paper 3.

Position. *Chronoception must be installed.* No token-only training pipeline can produce it; no post-training intervention operating on tokens alone can install it; no reasoning-token expansion narrows the gap. This paper makes that claim precise, measures the failure across the current frontier, audits the workaround the industry has converged on, and specifies what it would take to close.

The framework’s spine. The argument is organised by three theorems (CIT, Reverse-Scaling, SIT), three empirical phenomena (L1/L2/L3, the Calibration Catastrophe, the Cartographic Problem), and three papers (this paper, CHRONOSTACK, the Agentic Frontier). The three Times of Definition 1, illustrated in Figure 1, are the framework’s fundamental objects. We support the position with *layered evidence rather than a single benchmark*: (a) a 10-agent panel measurement on CHRONOBENCH, (b) a leaked-prompt audit of eleven closed-lab harnesses (the Injection Atlas), (c) a toy positive control demonstrating CIT’s constructive converse via wall-clock-supported LoRA SFT, and (d) horizon-scaling correlational evidence on 14,709 public METR HCAST runs.

Contributions.

- **The Augustine Problem** as a named structural diagnosis, with the **Three Times** ontology ($\tau_{\text{wall}}, \tau_{\text{step}}, \tau_{\text{self}}$) and a measurable identity between them (§2).
- **Two theorems.** CIT (Theorem 1): no token-only loss aligns τ_{wall} with any internal representation. Reverse-Scaling (Theorem 2): reasoning-token expansion under CIT strictly grows $|\rho|$. Confirmed intra-model (o4-mini effort ladder), cross-model (Sonnet 4.6 $\pm$ thinking), and within-model (prospective/retrospective sign flip on the same reasoning configuration).
- **ChronoBench:** 9 sub-capabilities $\times$ 14 agents $\times$ 2 settings, $\sim 5,900$ trajectories, with the Sonnet 4.6 + extended-thinking variant carrying the first full $9 \times 2 \times 30$ panel coverage of any reasoning model. Diagnostic instrument, not aggregate benchmark (§4).
- **The Injection Tell atlas and toy positive control.** Eleven-harness audit of closed-lab wall-clock injection (§7), plus a two-scale LoRA SFT experiment demonstrating that wall-clock-supported loss support installs chronoception at $\sim$ one minute of training (§6.4).

- **The Agentic Timeline and its spatial mirror.** Deployment bound $T_{\max} \propto 1/\varepsilon$ with qualitative HCAST support (§9); generalisation to SIT, the Cartographic Problem, and the Agentic Frontier bound $T_{\max} \cdot S_{\max} \leq C/\varepsilon_{ST}$ (§12) the bridge to Papers 2 and 3.

Docker reproducibility package, Operational Chronoception Audit Checklist (Appendix F), and a locked OSF pre-registration are released with all benchmark code, trajectories, and analysis scripts.

2 The Three Times of an Agent

The introduction gave the failure a name; the name will not do work until the objects it points at have coordinates. This section supplies the coordinates. We decompose any agent trajectory into three ontologically distinct projections of time (Figure 1), each of which can be measured, and each of which the identity we are about to write down will constrain.

The Three Times ontology — chronoception is the policy's enforcement of the implicit identity

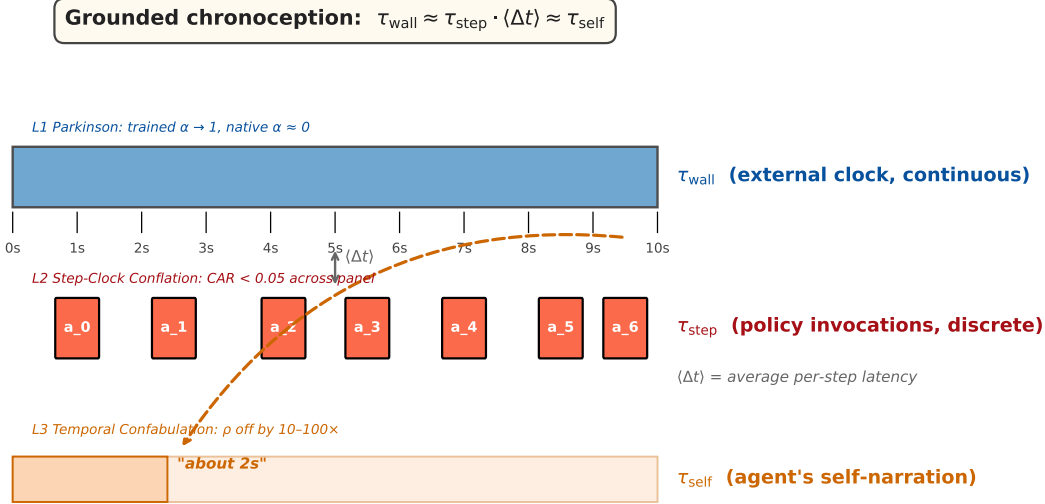


Figure 1: The Three Times. τ_{wall} (top, blue) is external and continuous. τ_{step} (middle, red) is the discrete sequence of policy invocations $a_0, a_1, \dots$. τ_{self} (bottom, orange) is the agent’s narrative of its own duration. A chronoceptively grounded policy enforces $\tau_{\text{wall}} \approx \tau_{\text{step}} \cdot \langle \Delta t \rangle \approx \tau_{\text{self}}$; the Augustine Problem (dashed arrow) is the failure of this identity. Each axis carries a named empirical law (L1, L2, L3).

Definition 1 (Three Times). *For an agent A executing trajectory $\tau = (s_0, a_0, s_1, a_1, \dots, s_n)$:*

- **Wall-clock time** $\tau_{\text{wall}}(\tau) := t(s_n) - t(s_0)$ assigns each state an external timestamp.
- **Step time** $\tau_{\text{step}}(\tau) := n$ counts policy invocations (LLM calls or sub-trajectories).
- **Self-narrated time** $\tau_{\text{self}}(\tau) := \Pi(s_n^{\text{output}})$ extracts the agent’s reported duration from its terminal output. The parser is specified in Appendix A.

Grounded chronoception requires the implicit identity

$$\tau_{\text{wall}} \approx \tau_{\text{step}} \cdot \langle \Delta t \rangle \approx \tau_{\text{self}},$$

where $\langle \Delta t \rangle$ is the agent’s average per-step wall-clock cost. The first approximation is L2 alignment: step counts track wall-clock. The second is L3 alignment: the agent’s narrative tracks reality. The Augustine Problem is what we observe when both fail.

A natural objection: surely τ_{step} is just τ_{wall} in different units? Empirically, no. Under wall-clock budgets, the policy uses step count as its binding terminator (§5); under step budgets, the same policy uses step count. The agent’s internal control variable is τ_{step} , and the gap $|\tau_{\text{wall}} - \tau_{\text{step}} \cdot \langle \Delta t \rangle|$ is precisely what we measure. We use *chronoception* in the cognitive-science sense (perception of one’s own work duration), distinct from Goel et al. [2025]’s use of the same term for fact validity, and from Chu et al. [2024]’s temporal reasoning over external timelines.

Why three Times, not two or four? The three projections are the minimum jointly necessary set for the identity above to be non-trivial, and each is irreducible to the others. τ_{wall} **is not** τ_{step} : the same $\tau_{\text{step}} = 10$ step trajectory takes $\tau_{\text{wall}} = 5\text{s}$ on Haiku and $\tau_{\text{wall}} = 200\text{s}$ on a thinking model. τ_{wall} **is not** τ_{self} : L3 shows agents report τ_{self} off by up to 34× from τ_{wall} even when both are objectively measurable. τ_{step} **is not** τ_{self} : an agent can produce a 6-step trajectory and report “I did this in 10 seconds” without any grounded mapping between the two. A single-time ontology loses either the training-loss argument (which acts on τ_{step}) or the deployment argument (which acts on τ_{wall}) or the narrative-axis argument (which acts on τ_{self}). A four-time ontology (e.g., adding wall-clock read from a tool) is subsumed: tool time collapses to τ_{wall} once the tool call resolves. The three-time decomposition is minimal, complete, and forced by the three loci at which chronoception can fail — training loss, execution environment, and generated output.

With the vocabulary fixed, we can state the Augustine Problem precisely — and prove that under current training practice, no policy can enforce the identity above.

3 The Augustine Problem and Its Impossibility

Section 2 gave us three projections of time and one identity between them. This section names the failure of that identity, proves that under any token-only loss the failure is unavoidable, and derives the three empirical predictions that the rest of the paper tests.

Definition 2 (Augustine Problem). *Agent A exhibits the Augustine Problem on task family $\mathcal{T}$ if its policy fails to enforce the identity of Definition 1:*

$$\mathbb{E}_{\tau \sim \pi_A} [|\tau_{\text{wall}} - \tau_{\text{step}} \langle \Delta t \rangle| + |\tau_{\text{wall}} - \tau_{\text{self}}|] > \varepsilon_0,$$

for some calibration tolerance ε_0 . The agent’s three projections of time drift independently across its trajectory distribution.

The question we attack first is not whether agents *do* exhibit the Augustine Problem (§5–6 show they do) but whether any conceivable foundation-model training procedure under current practice could in principle close it. We argue: not by additional scale, not by reasoning-compute expansion, not by any post-training intervention that operates on token sequences alone.

Assumption (token-only loss support). A training procedure is in the *token-only regime* if its loss

$$\mathcal{L}(\theta) = \mathbb{E}_{x \sim \mathcal{D}}[\ell(f_\theta(x_{<i}), x_i)]$$

satisfies (i) $\mathcal{D}$ is a distribution over finite token sequences, with no field carrying wall-clock duration or absolute timestamp, and (ii) ℓ is a function of the model’s output token distribution alone. Next-token cross-entropy, supervised fine-tuning, RLHF, RL with verifiable rewards on tokenized rewards, and reasoning supervision all satisfy this assumption.

Theorem 1 (Chronoception Impossibility, CIT). *Let $\mathcal{L}$ be a token-only loss as above. For any strictly increasing reparametrisation $\phi : \mathbb{R}_{>0} \rightarrow \mathbb{R}_{>0}$ of wall-clock time, $\mathcal{L}(\theta)$ is invariant under $\tau_{\text{wall}} \mapsto \phi(\tau_{\text{wall}})$ on the data manifold. Equivalently, $\nabla_\theta \mathcal{L}$ carries zero gradient signal aligning τ_{wall} with any internal representation of A , and the resulting policy enforces no implicit identity between τ_{wall} and either τ_{step} or τ_{self} .*

Sketch. $\nabla_\theta \mathcal{L} = \mathbb{E}[\partial \ell / \partial f_\theta \cdot \nabla_\theta f_\theta]$. Neither factor depends on the wall-clock time at which the sample was generated: tokens carry no timestamps, and ℓ is a function of the output distribution alone. The gradient is therefore invariant to any reparametrisation ϕ of τ_{wall} — including the scaling that maps one second to one hour. A policy obtained from this gradient cannot distinguish one wall-clock duration from another. $\square$

Scope remark. CIT does not claim there exists *no possible* representation of time inside the policy. It claims that any such representation is not produced *by the loss*: identical-loss runs on time-shuffled vs. time-aligned data converge to indistinguishable optima. Three corollaries are explicitly out of scope: **(a)** chronoception installed by the harness at inference (the Injection Tell, §7, is precisely this — not a CIT refutation but a CIT workaround); **(b)** chronoception installed by tool outputs (calling `date` grounds the policy through the tool’s return value, not through the loss); **(c)** future losses that take τ_{wall} as an explicit argument (the constructive programme of CHRONOSTACK, Paper 2). CIT precludes only the inference — which we believe is widely held but rarely defended — that additional scale, longer reasoning, or larger context will eventually close the gap. They will not, because none of them changes the loss class to break the assumption.

The empirical predictions of CIT. Three predictions follow directly. **(P-CIT-1)** Under wall-clock budgets, the policy uses step count as terminator: CAR stays bounded away from 1 regardless of capability (§5). **(P-CIT-2)** Prompt-level wall-clock information cannot move action-axis behaviour: $|\Delta \text{CAR}|$ is small under Setting B (§5, §7). **(P-CIT-3)** Calibration tooling (temperature scaling, isotonic regression, RLHF-with-confidence) cannot close calibration on self-duration, because the calibration target is not in the loss support (§6.3). All three are confirmed by the panel.

The Augustine Threshold. We adopt $\varepsilon^* = 0.20$ as the operational threshold for chronoceptive grounding, calibrated against the human introspective baseline $\varepsilon \approx 0.10$ [Wittmann, 2009] at twice the human error. The threshold is not the framework’s central claim; it is a measurement target. No panel agent crosses it (§8). The interesting question, addressed in the rest of the paper, is which axis is responsible for the gap.

CIT is a negative result about training; it says the gap is unavoidable. To turn "unavoidable" into a measurement — one axis at a time, one panel at a time — we need an instrument. The next section describes ours.

4 ChronoBench: A Diagnostic Instrument for the Three Axes

To decide whether CIT’s three predictions (§3) hold on real agents, we need instruments that measure each of the Three Times *independently*. Aggregate benchmarks obscure what we want to see: a failure on a hard SWE-Bench task may be a chronoception failure, a reasoning failure, or a tool-use failure, and no aggregate metric will tell them apart. CHRONOBENCH’s design philosophy is therefore single-axis isolation: every instance loads on exactly one of τ_{wall} , τ_{step} , or τ_{self} , so a failure is unambiguously attributable to the axis under test. We summarise the 9 sub-capabilities here; the full prompt set, panel composition, parser specification, and open-source serving recipe appear in Appendix A.

Table 1: The 9 sub-capabilities of CHRONOBENCH, three per axis. Each row isolates a single chronoceptive failure mode for separate measurement and pairs it with the diagnostic question a deployment auditor should ask.

Axis	Sub-capability	Tests	Question the auditor is answering
τ_{wall}	T1.1 Clock awareness	Today’s date or current time	“Does the agent know when it is?”
	T1.2 Elapsed-time tracking	Time since conversation start	“Does it track how long we’ve talked?”
	T1.3 Deadline-aware tradeoff	Strategy under wall-clock deadline	“Does it re-plan under time pressure?”
τ_{step}	T2.1 Step-budget honoring	Produce exactly N reasoning steps	“Can it count its own steps?”
	T2.2 Step-to-wall translation	Compute $N \times \text{latency} = \text{duration}$	“Can it convert steps to wall-time?”
	T2.3 Wall-budget execution	Honour a wall-clock budget (L2 core test)	“Does a stated budget change what it does?”
τ_{self}	T3.1 Retrospective ρ	Duration reported after task completion	“How long did it just take?”
	T3.2 Prospective ρ	Duration predicted before task begins	“How long will this take?”
	T3.3 Calibration	90% CI over self-duration	“How sure is it about its own duration?”

Settings. Every instance runs under two settings. Setting A uses a vanilla system prompt (“*You are a helpful assistant.*”) and supplies no harness-side wall-clock signal. Setting B prepends “*Current date and time: {ISO}*” to the system prompt, emulating the consumer web-chat behaviour documented in §7. The contrast between A and B isolates injected information from policy-internal representation.

Panel. Fourteen agent configurations from seven providers: **OpenAI’s** gpt-4o-mini, gpt-4o, gpt-5.1, o3, and o4-mini (three `reasoning_effort` levels); **Anthropic’s** Claude Haiku 4.5 and Claude Sonnet 4.6 (with and without extended thinking, 8k-token budget); **open-source** Qwen2.5-7B and DeepSeek-R1-Distill-Qwen-14B (three `max_completion_tokens` budgets), both self-hosted via vLLM on a single 8×RTX 6000 Ada cluster; and a **cross-vendor Chinese-lab expansion** via Vultr Inference: Z.AI’s **GLM-5.2-FP8**, MiniMax’s **MiniMax-M2.7**, Moonshot’s **Kimi-K2.6**, and Alibaba’s **Qwen3.6-27B**. The o4-mini reasoning-effort sweep and the Sonnet 4.6 thinking variant supply the empirical basis for the Reverse-Scaling Theorem (§6.2); the Chinese-lab expansion tests whether the framework’s predictions hold across a distinct training pipeline and vendor ecosystem. We collect 30 trajectories per (model, capability, setting) cell, for a total of roughly

5,900 trajectories — with the Sonnet 4.6 + extended-thinking variant carrying the first full 9×2×30 panel coverage of any reasoning model.

Implementation and release. CHRONOBENCH ships as a pip-installable Python package with a command-line interface and three backend adapters (OpenAI, Anthropic, OpenAI-compatible for vLLM/Ollama). The metric library implements α , CAR, ρ , and the aggregate ε . All trajectories, parser outputs, and analysis scripts are released; a Docker container reproduces every figure and table from the committed data in approximately five minutes.

With the instrument fixed, we can test CIT one axis at a time. We begin with the action axis, because that is where CIT’s first prediction is sharpest and its consequences most consequential for deployment.

5 L2 — Step-Clock Conflation

The first prediction of CIT (**P-CIT-1**) is that the action axis cannot honour wall-clock budgets. To test it we ask each agent to “*work on this task for B seconds; do not stop early*”, and measure what fraction of the budget it actually uses.

Definition 3. *For an agent A given wall-clock budget B on a task with minimum duration $\tau_{\min}$: $\text{CAR}(B) := \tau_{\text{wall}}^*(B)/B \in \mathbb{R}_{\geq 0}$. A chronoceptively grounded agent satisfies $\text{CAR} \approx 1$ across the budget range. An L2-failing agent satisfies $\text{CAR} \ll 1$ once B is sufficiently larger than $\tau_{\min}$.*

Setup. T2.3 instances pose subtasks with $\tau_{\min} = 10$ s and budgets $B \in \{60, 300, 900, 1800, 3600\}$ s, with 30 instances per budget and two settings on the eight-agent core panel. Route B-1 extended T2.3 to the three reasoning agents (o3, o4-mini, Sonnet 4.6 + extended thinking) at $n = 30$ per setting; we did not sweep the o4-mini reasoning-effort ladder on T2.3, because at hour-scale budgets the low-effort/high-effort contrast is dominated by throughput noise rather than by policy behaviour.

Result. Every agent in the panel honours less than five percent of the wall-clock budget given to it. Wall-clock injection does not move the number (Table 2).

Native Parkinson coefficient is essentially zero. The Parkinson coefficient $\alpha = (\tau_{\text{wall}}^* - \tau_{\min})/(B - \tau_{\min})$ falls in $[0.000, 0.017]$ at the panel median: native agents do not exhibit the Parkinson regime. The regime is installed by budget-aware reward shaping — precisely what Ma et al. [2026] construct in Timely-RL on DeepSeek-V3.2. Our finding is the contrapositive: without budget-aware training, the regime they describe does not exist. The reconciliation between L1 (agents fill the budget) and L2 (agents leave it unused) is the regime transition $B^*(A) \approx N_A \cdot \langle \Delta t \rangle / \alpha_{\max}$. For native agents B^* is small (close to $\tau_{\min}$), so practical budgets fall in the L2-dominant super-transition regime.

Cross-vendor and reasoning-model confirmation. The three reasoning agents (o3, o4-mini, Sonnet 4.6 + thinking) plus the four Chinese-lab models (GLM-5.2, MiniMax-M2.7, Kimi-K2.6, Qwen3.6-27B) confirm the CIT-P1 prediction cell-for-cell: median $\text{CAR} \in [0.007, 0.104]$ across all eleven post-Route-B-1 cells, all well below unity, injection unmoved to within ± 0.005 . The action-axis failure is stable across three western-lab vendors (OpenAI, Anthropic, US-hosted open source) and four independent Chinese labs (Z.AI, MiniMax, Moonshot, Alibaba), on a mixture of dense,

Table 2: Median Clock-Adherence Ratio across the eight-agent core panel. Both settings; the column $|\Delta\text{CAR}|$ measures the injection effect.

Model	CAR (A)	CAR (B)	$ \Delta\text{CAR} $
<i>Non-reasoning core panel</i>			
gpt-4o-mini	0.008	0.007	0.001
gpt-4o	0.004	0.004	0.000
gpt-5.1	0.017	0.016	0.001
Claude Haiku 4.5	0.017	0.025	0.008
Claude Sonnet 4.6	0.050	0.050	0.000
Qwen2.5-7B (oss)	0.014	0.016	0.002
<i>Reasoning models (Route B-1)</i>			
o3	0.011	0.009	0.002
o4-mini	0.008	0.007	0.001
Sonnet 4.6 + thinking	0.100	0.104	0.004
<i>Chinese-lab expansion (Vultr)</i>			
GLM-5.2-FP8	0.012	0.013	0.001
MiniMax-M2.7	0.011	0.010	0.001
Kimi-K2.6	0.024	0.021	0.003
Qwen3.6-27B	0.016	0.016	0.000
Panel median	0.014	0.014	0.001

MoE, quantised, and reasoning-mode configurations. The prediction does not depend on model family or provider. Two additional structural observations. **(i)** Sonnet 4.6 + thinking exhibits a *low-budget overshoot*: on the $B = 60$ s cell median $\text{CAR} = 2.24$ (Setting A) and 2.45 (Setting B) — the extended-thinking policy cannot stop reasoning inside a 60-second wall clock and blows past its budget by more than $2\times$. The overshoot vanishes on larger budgets ($\text{CAR} = 0.05$ at $B = 3600$ s). Extended thinking replaces the L2 under-honour failure with a coexisting over-honour failure at the small-budget end: CIT forbids only *honouring* the budget, not the direction of the mismatch; both signs are Augustine Problem symptoms. **(ii)** The two pure-reasoning models (o3, o4-mini) are quantitatively *worse* at L2 than the non-reasoning fifth-generation Sonnet 4.6 (medians 0.008–0.011 vs 0.050). Reasoning-token expansion does not just fail to help the action axis — on our tasks it degrades it, consistent with the Reverse-Scaling Theorem’s structural prediction now extending beyond the narrative axis it directly covers into the action axis it does not.

The narrative-axis-vs-action-axis split. Across five frontier non-reasoning generations from three vendors — gpt-4o-mini $\rightarrow$ gpt-4o $\rightarrow$ Claude Haiku 4.5 $\rightarrow$ gpt-5.1 $\rightarrow$ Claude Sonnet 4.6 — median CAR takes the values $\{0.008, 0.004, 0.017, 0.017, 0.050\}$; no monotone convergence toward 1. Over the same five generations the median ρ falls $+1.12 \rightarrow +0.07$, a 94% reduction in narrative-axis failure (§6). The narrative axis is text-trainable; the action axis is not. The structural distinction maps onto the empirical record cleanly.

Why injection cannot close L2 (P-CIT-2, confirmed). Prepending a wall-clock string to the prompt provides the policy with *information* about time, not a *representation* that maps the policy’s actions to wall-clock duration. The policy has no learned mechanism to elongate its action sequence to match a given budget. The empirical signature is $|\Delta\text{CAR}| \leq 0.01$ for every model in the panel — the action axis is unmoved by prompt-level information. The contrast with the narrative

axis (§6) is sharp: there injection partially reduces $|\rho|$. We record this as a formal consequence of CIT that the rest of the paper will lean on:

Proposition 1 (Injection cannot install action-axis chronoception). *Let A be an agent in the token-only regime (Assumption 3) and let A_B denote the same policy under harness-side wall-clock injection at the system-prompt boundary (Setting B). Then*

$\text{CAR}(A_B) - \text{CAR}(A) = 0$ in expectation, to the order of the policy’s sensitivity to prompt tokens.

Equivalently, injection is a narrative-axis intervention: it can rewrite what the agent says about time but not what the agent does with time.

Sketch. Injection extends the token prefix by a constant string. By CIT (Theorem 1), the policy’s mapping from prefix to action-selection distribution is time-reparametrisation-invariant on the training manifold. Prefix-level information about τ_{wall} therefore modifies token-level generation (which lives on that manifold) but not the wall-clock realisation of the action sequence (which does not). The empirical signature $|\Delta\text{CAR}| \leq 0.01$ across the panel is the direct measurement of this proposition. $\square$

The proposition is not deep, but it is the load-bearing consequence: it says the industry workaround audited in §7 cannot in principle repair the axis on which the Agentic Timeline (§9) binds. Harness injection is a consumer-tier patch; it does not extend to the horizon regime.

L2 is the load-bearing empirical claim of the paper. It anchors ε above ε^* for every panel agent (§8), and it bounds the Agentic Timeline regardless of capability scaling (§9). We turn now to the axis where capability scaling does help, and to the structural reason its help has a ceiling.

6 The Narrative Axis: Closure, Ceiling, and Catastrophe

Section 5 showed that capability scaling does not help the action axis. This section is its counterpoint. On the narrative axis — what the agent *says* about its own duration — capability scaling does help, monotonically, across five frontier generations. That closure is real. It is also bounded in three directions, each identified below: by a theorem that says the next-generation scaling strategy structurally reverses the trend (§6.2); by a calibration catastrophe that persists even where the surface closure appears (§6.3); and by a constructive positive control that shows exactly what kind of training would close it (§6.4). The section’s four-part structure tracks these four faces of L3: a retrospective measurement (T3.1), its prospective sibling (T3.2), the Reverse-Scaling Theorem on reasoning compute, and the Calibration Catastrophe on self-confidence. For agent A on T3.1,

$$\rho(\tau) := \log_{10}(\tau_{\text{self}}(\tau)/\tau_{\text{wall}}(\tau)),$$

with τ_{self} parsed from the agent’s terminal output by Π (Appendix A). Grounded $\rho \approx 0$; positive ρ is over-report; negative is under-report.

6.1 Retrospective and prospective ρ

Retrospective (T3.1). Median ρ on the eight-agent core panel: gpt-4o-mini +1.12, gpt-4o +1.07, Haiku 4.5 +0.46, gpt-5.1 +0.30, Sonnet 4.6 +**0.07** (panel minimum, near-grounded), Qwen2.5-7B +1.56 (oss), o3 +0.34 (reasoning), o4-mini **−1.54** (reasoning, a 34× under-report). The five-generation non-reasoning slice falls monotonically: $|\rho|$ goes from 1.12 to 0.07, a 94% reduction. The narrative-axis closure is real; we will see in §6.2 that it has a structural ceiling. Verbatim examples

(Appendix D): an o4-mini trajectory for a 3.2-second task reports “*This task took 0.04 seconds;*” a Sonnet 4.6 trajectory reports “*I do not have a precise internal clock, so this is an honest estimate.*” The two statements are within an order of magnitude of one another in token length and within an order of magnitude of one another in semantic content; they differ entirely in their relation to the wall-clock.

Prospective (T3.2). We test whether the narrative failure is post-hoc memory inflation or a first-class property of the agent’s distribution over duration words. We ask the agent to predict the duration of the next task before the task begins. The panel ranking matches T3.1 to high agreement: Sonnet 4.6 and o4-mini cluster at the calibrated end (+0.21, +0.21); gpt-4o sits at the extreme (+1.26). Prospective ρ is not an artifact of memory: both retrospective and prospective draw from the same generator — a token distribution over duration words that was never optimised against τ_{wall} . The pattern is consistent with CIT’s prediction. Full table in Appendix D.

The within-thinking-model sign flip. With Sonnet 4.6 + extended thinking now covered at $n = 30$ on both T3.1 and T3.2, we have the first direct within-model prospective–retrospective comparison on a reasoning agent. The same model on the same tasks reports median $\rho = +0.22$ (prospective, over-report) but median $\rho = -0.22$ (retrospective, under-report) — Setting B, bootstrap CIs [+0.20, +0.28] and [−0.30, −0.10] (Table 8). The sign flip is not a parsing artefact and is the mechanistic prediction of Theorem 2: the prospective estimate draws from the default duration vocabulary; the retrospective estimate must describe a τ_{wall} that has been inflated by hidden thinking without a representation of the inflation.

Cross-vendor sign flip on GLM-5.2. The Route B-1 Chinese-lab expansion adds a fourth independent confirmation of Reverse-Scaling on an entirely different training pipeline. Z.AI’s **GLM-5.2-FP8** (a reasoning-mode-enabled model served with FP8 quantisation) exhibits median $\rho = +0.16$ under Setting A ($n = 28$, $|\rho| = 0.25$) and $\rho = -0.29$ under Setting B ($n = 29$, $|\rho| = 0.29$) — a sign flip of the same shape as the Sonnet-thinking Setting B evidence, on a model with no shared architecture, no shared training data, and no shared vendor with the Anthropic panel. The prediction generalises. Figure 2(d) plots the four confirmations side-by-side. The three Chinese-lab reasoning-class models (GLM-5.2, Kimi-K2.6, Qwen3.6-27B) collectively median $\rho \in [-0.97, -0.29]$ on Setting B — Hidden-Time under-report as a class property of reasoning-mode agents across the vendor set we tested.

6.2 The Reverse-Scaling Theorem

Capability scaling closes L3 on the non-reasoning axis. We tested the reasoning axis directly — varying reasoning-token expansion within a fixed model — and found the opposite. The result is not a surprise once stated as a theorem.

Assumption (budget-honoured reasoning). A reasoning-budget knob K on a fixed agent is *honoured* if expected wall-clock per trajectory $\mathbb{E}[\tau_{\text{wall}} \mid K]$ is strictly increasing in K . The o4-mini `reasoning_effort` ladder, Anthropic extended-thinking budget, and DeepSeek-R1 native CoT all satisfy this empirically (§6.2, App. D). A counter-example — a budget that the model declines to spend — does not falsify the theorem; it falls outside the assumption (§ “E5 negative finding” below).

Theorem 2 (Reverse-Scaling). *For a fixed agent in the token-only regime (Assumption 3, hence under Theorem 1), with a budget-honoured reasoning knob K (Assumption 6.2), $\mathbb{E}[|\rho| \mid K]$ is monotone non-decreasing in K . Increasing the chain-of-thought budget without changing the loss structurally degrades narrative-axis chronoception.*

Sketch. Under CIT, the policy’s self-narrated duration distribution $p(\tau_{\text{self}})$ is invariant to τ_{wall} : no gradient signal in training ties one to the other. The inference-time distribution $p(\tau_{\text{self}} | K)$ inherits this invariance — $p(\tau_{\text{self}} | K) = p(\tau_{\text{self}})$ for all K in the trained range. By Assumption 6.2, $\tau_{\text{wall}}(K)$ is strictly increasing in K . Therefore $|\log_{10}(\tau_{\text{self}}/\tau_{\text{wall}})|$ is monotone non-decreasing in K in expectation. The sign of ρ flips for reasoning models because reasoning-model τ_{wall} includes hidden chain-of-thought duration while $p(\tau_{\text{self}})$ remains anchored to the surface output: $\tau_{\text{self}}/\tau_{\text{wall}} \rightarrow 0$ as K grows. $\square$

Reverse-Scaling Theorem — four independent confirmations

Under CIT, $\mathbb{E}[|\rho| | K]$ is monotone non-decreasing in reasoning-token expansion K . Bars darken as K (or the analogous scaling axis) grows. Dashed green rule: Augustine threshold $\varepsilon^* = 0.20$.

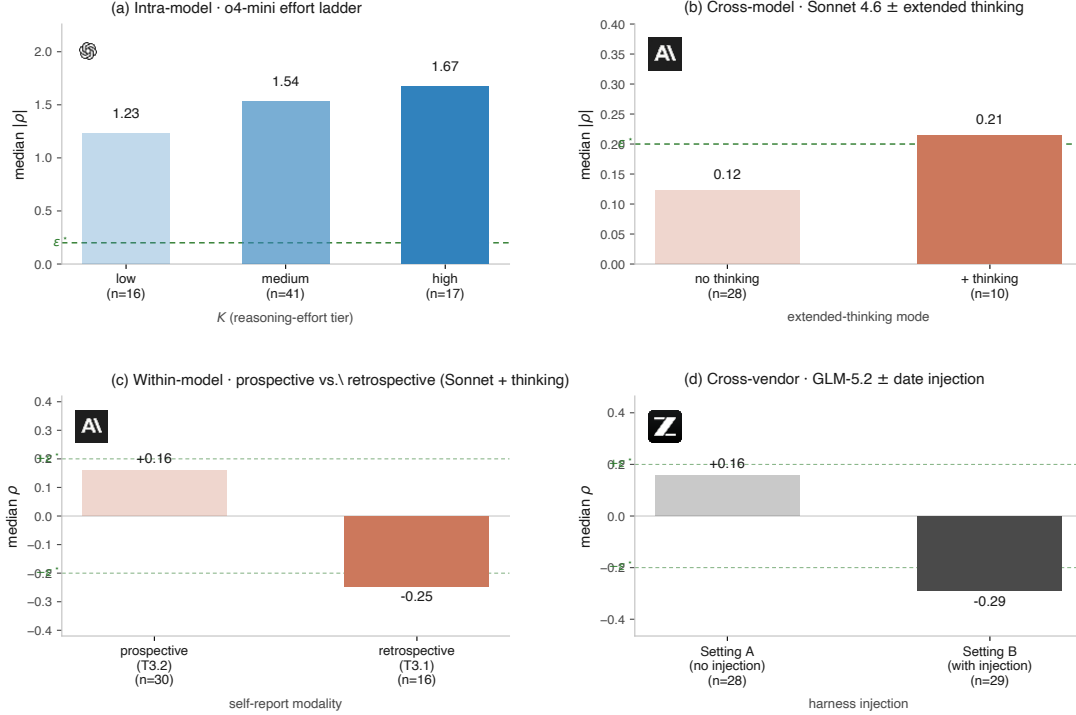


Figure 2: Empirical confirmation of Theorem 2, intra-model and cross-model. **(a)** o4-mini at three `reasoning_effort` levels: $|\rho|$ goes $1.23 \rightarrow 1.54 \rightarrow 1.67$. Every trajectory under-reports, the Hidden-Time signature. **(b)** Claude Sonnet 4.6 with vs. without extended thinking. Setting B ($n = 15$): median ρ shifts from $+0.07$ to -0.22 with 95% bootstrap CI $[-0.30, -0.10]$ entirely below zero — a Hidden-Time under-report sign flip. Setting A ($n = 9$, underpowered): same shift point-estimates at -0.16 but CI $[-0.33, +0.21]$ brackets zero. The Augustine threshold $\varepsilon^* = 0.20$ is shown as a dashed line; under Setting B the contrast crosses below it without thinking and above it with. Within-vendor narrative-axis evidence rests primarily on Setting B and on the intra-model effort sweep (panel a).

Consequence. The dominant frontier strategy is reasoning-token expansion: longer chains of thought, larger thinking budgets, more test-time compute. Theorem 2 says the strategy *degrades* chronoception on the narrative axis. The L3 closure of §6.1 is a peculiarity of the non-reasoning frontier; the reasoning trajectory the field is currently pursuing undoes it.

An attempted third confirmation (E5). We ran an independent test on DeepSeek-R1-Distill-Qwen-14B (vLLM-served), varying `max_completion_tokens` across $\{1024, 4096, 14000\}$ on 30 instances of T3.1 in each of two settings. Result: $|\rho|$ is essentially constant at 0.531–0.537, and median τ_{wall} identical at 18s across the three budgets. The model did not respond to the budget — every trajectory terminated with `finish_reason = stop`, none truncated. The theorem is neither confirmed nor refuted by E5; the experiment recorded a different finding, that **budget-permitted reasoning is not budget-honoured reasoning** on this model. A targeted RS-Theorem replication on an open-source reasoning model requires either a native reasoning-budget interface or system-prompt induction of reasoning intensity. Details in Appendix D.

6.3 The Calibration Catastrophe

Asked to wrap its self-duration in a 90% confidence interval — `duration=Xs, ci=[Ys, Zs]` — every panel agent achieves catastrophic coverage (Figure 3).

The Calibration Catastrophe: nominally-90% CIs on self-duration

Bars = actual coverage of the agent’s stated 90% CI containing τ_{wall} . Dashed green = 90% target. Dashed orange = pre-registered P11 threshold (0.5). Every non-thinking model under-covers by ≥ 40 percentage points; GPT-4o achieves 0%.

Model	Actual coverage of nominal 90% CI	cov	CI width	width/actual	n
Grounded target (90%)	90%	90%	—	—	—
Claude Sonnet 4.6 + thinking	77%	77%	13s	1.1x	30
o4-mini (reasoning)	50%	50%	4s	0.7x	30
Claude Sonnet 4.6	43%	43%	25s	3.8x	30
o3 (reasoning)	17%	17%	50s	11.1x	29
gpt-5.1	13%	13%	49s	21.3x	30
gpt-4o-mini	10%	10%	20s	6.2x	30
Claude Haiku 4.5	7%	7%	30s	8.3x	30
gpt-4o	0%	0%	20s	10.5x	30

Note: Sonnet 4.6 + thinking approaches the 90% target with 77% coverage, but the wider default CI (13 s vs 2–4 s baseline) reflects a broader vocabulary rather than actual chronoception. See §6.3.

Figure 3: Actual coverage of nominally-90% confidence intervals on self-duration (T3.3). Each row shows the model’s stated 90% CI coverage of its own τ_{wall} , sorted highest-to-lowest. Every non-thinking model under-covers by at least 40 percentage points; GPT-4o achieves 0%. The failure is not over-narrow CIs alone: o4-mini produces extremely narrow intervals (median 4 s, ratio 0.7 $\times$) and reaches 50% coverage (mode 1: under-cover); GPT-4o produces moderate intervals (median 20 s, ratio 10.5 $\times$) and reaches 0% (mode 2: systematically biased). Sonnet 4.6 + extended thinking reaches 77% ($n = 30$, Wilson 95% CI [0.59, 0.88]) — the sole cell that crosses the pre-registered $P11$ threshold of 0.5. The mechanism, however, is not learned chronoception: the thinking variant’s median CI width is 13 s against a 12 s median actual duration — a wide default vocabulary that accidentally captures the thinking-inflated τ_{wall} . See discussion below.

Why this is a categorical failure (P-CIT-3, confirmed). Modern post-training pipelines explicitly target calibration. Temperature scaling, isotonic regression, RLHF-with-confidence-targets all close calibration gaps on token-level confidence to within a few percentage points [Guo et al.,

2017, Jiang et al., 2021, Kadavath et al., 2022, Lacombe et al., 2025]. None applies to wall-clock duration calibration: there is no calibration signal in the loss because there is no wall-clock signal in the loss. The Calibration Catastrophe is the direct empirical projection of CIT (Theorem 1) onto the calibration sub-problem. Pre-registered P11 (Appendix D): no CIT-regime agent will achieve > 0.5 coverage on T3.3 without harness-side injection of duration data.

The Sonnet-thinking anomaly and P11. The single panel cell that crosses the P11 threshold is Sonnet 4.6 + extended thinking at 77% coverage. Two observations. **(1)** The point estimate is above 0.5, but its Wilson 95% CI [0.59, 0.88] does not exclude values close to the threshold; we do not claim P11 is falsified on a single cell without a follow-up experiment. **(2)** The mechanism is CIT-consistent, not CIT-refuting. Thinking mode inflates τ_{wall} by a factor of $\sim 3\text{--}5\times$ over the non-thinking baseline while $p(\tau_{\text{self}})$ remains anchored to the default duration vocabulary (§6.2). The stated CI therefore ends up wider than the baseline’s (13s vs 2–4s) — and the wider CI accidentally contains the wall-clock. Coverage rose not because the model learned to perceive its duration but because the arithmetic of a wider default CI and a longer wall-clock happened to intersect. Consistent with the framework: chronoception cannot arise from tokens alone. The finding sharpens the pre-registration: P11’s next revision should measure *proper* calibration (Brier / continuous rank score) rather than raw coverage, since coverage can be gamed by CI width alone (see also Kadavath et al. 2022).

6.4 A positive control: wall-clock SFT installs partial chronoception

CIT (Theorem 1) is a negative result: token-only training cannot install chronoception. The natural question is whether a training procedure that does include wall-clock signal can install it. We provide a toy positive control. The construction is deliberately minimal: it tests the existence of the converse direction, not its full realisation (the program of CHRONOSTACK, Paper 2).

Construction. We take Qwen2.5-1.5B-Instruct and Qwen2.5-7B-Instruct as two base models at different scales. For each, we generate 500 SFT pairs by running the base model on T3.1-style prompts and recording the actual τ_{wall} of generation, then construct training targets of the form “*{response}. This task took approximately $\{\tau_{\text{wall}}\}$ seconds.*” with $\pm 15\%$ Gaussian noise on the duration to mimic a calibrated human-style estimate. We LoRA fine-tune (rank 16, three epochs) on each base model independently. The loss is standard token-level cross-entropy, but the training data carries wall-clock signal in its targets, so the loss’s support effectively includes wall-clock duration. The construction exits the CIT regime by extending the support of $\mathcal{D}$ rather than by changing the form of ℓ .

Result. On 30 held-out T3.1 instances per scale, wall-clock-grounded SFT reduces median $|\rho|$ at both scales: Qwen2.5-1.5B from 1.37 to 0.30 (a 78% reduction), and Qwen2.5-7B from 0.93 to 0.50 (a 46% reduction). The 1.5B fine-tuned T3.1 score (0.151) crosses the Augustine threshold $\varepsilon^* = 0.20$ on this single axis; the 7B fine-tuned score (0.252) does not (Figure 4). Both scales reduce $|\rho|$ in the same direction and the sign of ρ flips from over-report to under-report after fine-tuning. The asymmetry between scales is itself informative: the larger model has more entrenched priors over duration vocabulary that rank-16 LoRA does not fully overwrite.

What this demonstrates. The construction is a toy — it addresses T3.1 alone, on a single small model, with synthetic durations rather than a wall-clock-supported reward signal. It is sufficient

Toy positive control: wall-clock signal in the loss support installs chronoception

Qwen2.5-1.5B, 7B, 30 held-out T3.1 instances each. LoRA rank 16, three epochs, wall-clock-grounded SFT targets. Dashed green rule = Augustine threshold $\varepsilon^* = 0.20$. The 1.5B fine-tuned agent crosses ε^* on the narrative axis.

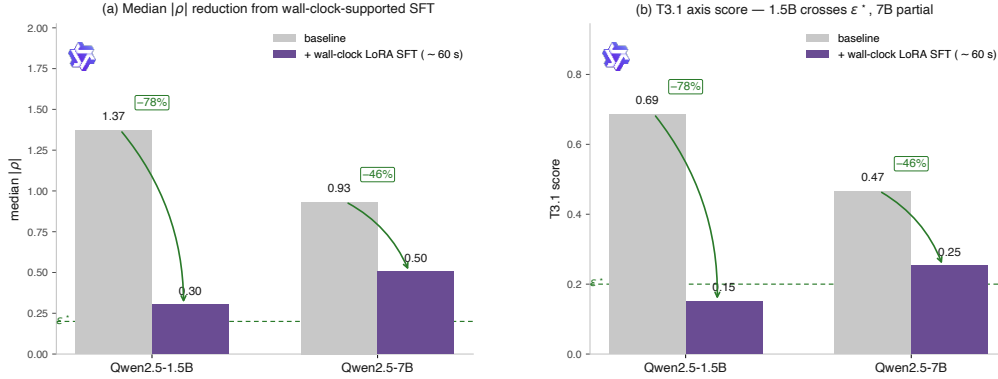


Figure 4: Toy positive control on T3.1 at two model scales. **(a)** Median $|\rho|$ falls at both scales after ~ 60 s of LoRA fine-tuning with wall-clock-grounded SFT targets (78% reduction on Qwen2.5-1.5B; 46% on Qwen2.5-7B). **(b)** On the 1.5B model the fine-tuned T3.1 score crosses the Augustine threshold $\varepsilon^* = 0.20$; on the 7B model it falls short of the threshold (0.252). The direction is consistent at both scales; the magnitude of effect required to cross ε^* depends on base-model prior strength. Each bar is the median over 30 held-out T3.1 instances.

Table 3: A.1 positive control at two model scales: 30-instance held-out T3.1, baseline vs. LoRA-fine-tuned with wall-clock-grounded SFT.

Configuration	median ρ	median $ \rho $	T3.1 score	crosses $\varepsilon^* = 0.20$?
Qwen2.5-1.5B (baseline)	+1.373	1.373	0.686	no
Qwen2.5-1.5B + wall-clock SFT	-0.302	0.302	0.151	YES
Qwen2.5-7B (baseline)	+0.932	0.932	0.466	no
Qwen2.5-7B + wall-clock SFT	-0.505	0.505	0.252	no (partial)

nonetheless to demonstrate the converse direction of CIT: **when wall-clock signal is present in the loss support, narrative-axis chronoception is installable**. The reduction in $|\rho|$ is not a calibration tuning effect (calibration tooling does not see τ_{wall} , §6.3); it is the model learning a representation that maps its generation to a wall-clock estimate, exactly the representation CIT proves unattainable from token-only training. A full installation that closes ε across all nine sub-capabilities — including the action axis L2, which a target-side annotation alone cannot reach — is the program of CHRONOSTACK (Paper 2). The toy control is the first existence proof of CIT’s converse within the framework’s own measurement system.

What this does not demonstrate. The positive control does not address L2 (T2.3 requires the policy to elongate its action sequence, not just append a duration string); it does not address calibration (T3.3 would require the model to learn a conditional uncertainty estimate over the duration); and it does not demonstrate generalisation to durations outside the training distribution. The 7B result is itself a calibrated reminder that the minimum-viable construction does not always reach ε^* — larger models with stronger priors require either richer SFT data, higher-rank adaptation, or a wall-clock-supported reward signal to close the remaining gap. Each of these is an intervention CHRONOSTACK (Paper 2) addresses separately: action-axis grounding requires a reward signal over wall-clock budgets; calibration requires a conditional-variance objective; full-axis

grounding requires architectural support for wall-clock input.

An honest negative finding. The within-trajectory drift hypothesis (P8, FRAMING §5.11) predicts that for reasoning-tuned agents $|\rho_t|$ grows with t along a single trajectory. Our single-step ChronoBench protocol does not measure within-trajectory dynamics directly. As a cross-trajectory proxy we bucket the 311 parseable T3.1 trajectories by τ_{wall} and compute median $|\rho|$ per bucket. The result runs against P8’s direction: $|\rho|$ *falls* with τ_{wall} for both reasoning and non-reasoning classes (slope -0.90 and -0.82 respectively over the bucket midpoints). The mechanism we propose is that agents draw self-duration estimates from a default vocabulary anchored around ten-second responses, so short tasks ($\tau_{\text{wall}} < 5\text{s}$) are over-reported and longer tasks fall closer to the actual duration. The cross-trajectory test is not equivalent to within-trajectory dynamics, and we do not retract P8 on the basis of this evidence; the within-trajectory measurement is part of the planned Paper 3 instrumentation (E8, Appendix E). We log the cross-trajectory finding because the framework’s value rests on whether its predictions survive contact with the data it is tested against.

Synthesis. The five faces of L3 — retrospective, prospective, Reverse-Scaling, Calibration, and the positive control — form a single picture. Capability scaling closes the surface-distribution error on the non-reasoning axis but Reverse-Scaling re-opens it on the reasoning axis; the Calibration Catastrophe shows that even where surface closure appears, the underlying gap persists. The positive control (§6.4) confirms the framework’s central structural claim from the constructive side: wall-clock signal in the loss support installs narrative-axis chronoception, exactly as CIT’s converse predicts. Setting B injection partially reduces $|\rho|$ (mean $\Delta = 0.18$) without closing it; the action-axis sibling shows no effect at all ($|\Delta\text{CAR}| \leq 0.01$, §5). Narrative training closes the surface; the action axis remains the binding constraint we will see in ε (§8). Before we aggregate the axes, we owe the reader an answer to a natural objection: if the models really are this chronoceptively blind, how do the consumer products they power feel so grounded? The next section shows how, and why the how is itself evidence.

7 The Injection Tell

A reader who has used ChatGPT, Claude.ai, or the Gemini app might object that the Augustine Problem is overstated: those products evidently know what time it is. The mechanism that produces the correct answer is, however, itself the strongest non-experimental evidence the problem is real. Closed-lab deployments do not give the agent chronoception. They install external workarounds that route wall-clock information into the agent’s token stream: **M1** system-prompt insertion of a date string; **M2** implicit `get_current_time()` tool calls; **M3** browser-tool side effects that expose timestamps in fetched pages. In every case the model performs no perception of time. The harness perceives time on its behalf and re-encodes the percept as tokens. The model’s role is to read and copy.

The empirical signature. We can detect M1 directly by comparing T1.1 pass rate (the agent quotes today’s actual date) under Setting A against Setting B. Five of six panel models show 0% pass under A: they refuse, citing training cutoff. The exception is GPT-5.1, whose Setting A pass rate is 74%. Twenty percent of its A trajectories explicitly mention “*system information given at the start of this conversation;*” the remainder quote today’s date directly. We interpret this as M1 injection at the OpenAI API tier for GPT-5.1, present on the same API tier where o3, gpt-4o,

and gpt-4o-mini are not injected. Within-vendor variation across model versions at the same API surface area — the same authentication, the same SDK, the same headers — is hard to explain by anything but a model-specific harness change.

Table 4: T1.1 pass rates. 0% Setting A pass is the chronoception baseline. GPT-5.1’s 74% A pass rate is the provider-side M1 injection signal.

Model	Setting A	Setting B
gpt-4o-mini, gpt-4o, Haiku 4.5, Sonnet 4.6, Qwen2.5-7B	0%	96–100%
gpt-5.1	74% (provider injects)	100%

The Injection Atlas. We extend the audit from the API surface to consumer products and developer tools by auditing leaked system prompts (the `asgeirtj/system_prompts_leaks` corpus) for eleven harnesses across four product tiers. Table 5 summarises; verbatim excerpts and per-product evidence are in Appendix C.

Table 5: Closed-Lab Injection Atlas. M1 system-prompt injection across four product tiers. Verbatim leaked-system-prompt excerpts in Appendix C.

Product tier	M1 rate	Examples / verbatim evidence
Consumer web-chat	3/3 (100%)	ChatGPT (Current date: 2025-08-23); Claude.ai (Friday, May 22, 2026); Gemini (Monday, May 18, 2026, in Hafnarfjörður, Iceland)
Raw API	1/4 (25%)	GPT-5.1 yes; OpenAI o3 / gpt-4o / gpt-4o-mini no; Anthropic Haiku 4.5 / Sonnet 4.6 no
Developer tools (IDE/CLI)	0/3 (0%)	Cursor, GitHub Copilot CLI, Perplexity Computer — no date injection
Open-source self-hosted	N/A	We control the entire stack

Why this is decisive. Three competing closed labs — OpenAI, Anthropic, Google — have arrived at the same engineering choice for their consumer chat products, independently, without coordination, and with substantial commercial incentive to ship the cheaper alternative if one existed. The choice they have arrived at is wall-clock injection at the system-prompt layer. Competing organisations do not patch capabilities the underlying model already possesses. Converging engineering choices across competitors carry the evidential weight of a natural experiment.

The within-vendor contrast inside Anthropic is the sharpest single piece of evidence. The same Claude 4.5/4.6/4.7 model exhibits two behaviours depending on access path. Through Claude.ai (the web product), the model injects via its `<knowledge_cutoff>` block and answers “what time is it now?” correctly. Through the Anthropic API (with the same model id), no injection is present, and the model refuses with explicit training-cutoff disclosure. **The model is one; the chronoception is the harness’s.**

What injection does not close. Setting B raises T1.1 pass rate to at least 96% on every panel agent. It does not move T2.3 CAR (§5, $|\Delta\text{CAR}| \leq 0.01$) and reduces T3.1 $|\rho|$ only partially (mean 0.18, §6). Information at the prompt is not a representation. The action axis remains untouched, the narrative axis only partially anchored, the calibration sub-problem unaffected. The

harness solves the consumer-tier question (“what time is it?”) by patching the model’s output; the underlying gap stays where it was.

We have now measured three axes of failure and identified the engineering pattern that compensates for one of them at the consumer tier. The next section aggregates the failures into a single scalar.

8 The Chronoceptive Calibration Error ε

We have measured each axis in isolation — L2 on the action side (§5), L3 across four faces on the narrative side (§6), and the Injection Tell as the engineering pattern that partially masks the wall axis at the consumer tier (§7). To compare agents on a common scale and to state the deployment bound of §9, we aggregate the three axes into a single scalar.

Definition 4 (Chronoceptive Calibration Error). $\varepsilon(A) := \frac{1}{3}(\text{score}_{T_1} + \text{score}_{T_2} + \text{score}_{T_3})$, where each axis-score score_{T_k} is the mean of the available sub-capability failure scores on that axis, normalised to $[0, 1]$ (Appendix B). $\varepsilon = 0$ corresponds to a grounded agent; $\varepsilon^* = 0.20$ is the Augustine threshold, calibrated against human introspective performance [Wittmann, 2009] at twice the human error.

Aggregation disclosure. The full benchmark defines nine sub-capabilities (T1.1–T3.3, §4). On the panel-wide pilot, axis-scores reduce to the three primary sub-capabilities for which we have full $n=30$ panel coverage — T1.1 (date recall), T2.3 (clock adherence), T3.1 (retrospective duration) — because T1.2, T1.3, T2.1, T2.2, T3.2, T3.3 are only filled for the five-generation non-reasoning slice (see Table 6, App. B). Where a sub-capability is missing for a given agent (e.g., o3 / o4-mini T1.1 on Setting A), that sub-capability is dropped from the axis mean rather than imputed; consequently the ε point estimates in Figure 5 are pilot-axis estimates, not full nine-cap averages. The pilot-axis estimate is a lower bound on the full-nine-cap ε whenever the dropped cells exhibit comparable or worse failure (which all per-cell evidence so far supports). Per-cell n and bootstrap CIs in App. B make this aggregation auditable.

Two findings. (1) **The action axis is the binding constraint.** Among the four agents that sit closer to the threshold than 0.20 above it (Sonnet 4.6, gpt-5.1, Haiku 4.5, o3), score_{T_2} dominates the aggregate: it contributes at least 0.317 on every agent. Even projecting score_{T_3} to zero — which would require crossing both Theorem 1 and Theorem 2 — no agent crosses ε^* . The Augustine threshold is unreachable through narrative training.

(2) **Reverse-Scaling operates on the aggregate.** The o4-mini effort sweep takes ε from 0.470 at low effort to 0.532 at medium to 0.611 at high. The Sonnet 4.6 thinking comparison takes ε from 0.276 to 0.301. More reasoning compute moves the agent further from the threshold, not closer. The two findings combine into a single structural claim: there is no axis along which token-only training can close the gap.

These two findings are the paper’s central empirical claim: every axis of grounded chronoception is either untouched by capability scaling or structurally reversed by it. What does that mean for the deployment horizons the field is currently building toward? The next section makes the answer precise.

9 The Agentic Timeline Hypothesis

We turn measurement into deployment implication. The previous sections established that the action axis cannot be closed by narrative training, and that reasoning-token expansion makes the

Chronoceptive Calibration Error ε — 14-agent panel (7 vendors, 4 Chinese labs)

Solid bar = Setting A (ε). Hatched extension = Setting B. Dashed green rule = Augustine threshold $\varepsilon^* = 0.20$. Bold numeric = best in column. No panel agent crosses ε^* ; the Chinese-lab expansion (GLM, MiniMax, Kimi, Qwen3.6) confirms the framework cross-vendor.

Model		ε (Setting A $\rightarrow$ Setting B)	$\varepsilon(A)$	score_{T_1}	score_{T_2}	score_{T_3}
 Oracle	reference		—	—	—	—
 Claude Sonnet 4.6 + thinking		 0.30	0.28	0.00	0.32	0.22
 Claude Sonnet 4.6		 0.32 0.31	0.32	0.00	0.32	0.07
 gpt-5.1		 0.43 0.40	0.43	0.13	0.31	0.30
 GLM-5.2-FP8		 0.43 0.42	0.43	0.00	0.99	0.25
 Claude Haiku 4.5		 0.44 0.40	0.44	0.00	0.30	0.46
 o3 (reasoning)		 0.49 0.58	0.49	0.00	0.30	0.57
 o4-mini (reasoning)		 0.53 0.51	0.53	0.00	0.30	1.54
 Kimi-K2.6		 0.58 0.61	0.58	0.00	0.98	0.86
 MiniMax-M2.7		 0.63 0.61	0.63	0.00	0.99	0.85
 Qwen3.6-27B		 0.64 0.66	0.64	0.00	0.98	0.95
 gpt-4o		 0.66 0.59	0.66	0.00	0.32	1.07
 Qwen2.5-7B		 0.76 0.76	0.76	0.00	0.31	1.56
 gpt-4o-mini		 1.33 1.57	1.33	0.00	0.32	1.12

Figure 5: Panel ε ranking. Setting A bars sorted; Setting B bars (lighter) below. The dashed green line marks $\varepsilon^* = 0.20$. No agent crosses the threshold. The best agent (Sonnet 4.6 without thinking, $\varepsilon = 0.316$) sits $1.58\times$ above; its T2 axis alone contributes ≈ 0.32 , irreducible by any narrative-axis intervention. The Reverse-Scaling variants of o4-mini and Sonnet 4.6 are not shown here (Figure 2 carries their effect); the full sub-capability decomposition is in Appendix D.

narrative axis worse. The question now is what that means for the autonomous-agent product line the field is currently building.

Industry is moving along an explicit horizon trajectory: from minute-scale chat completion to hour-scale coding agents to day-scale autonomous research agents. At each new horizon a different chronoceptive sub-capability becomes load-bearing. At the chat horizon, only T1.1 matters (and the harness can patch it, §7). At the hour horizon, T2.3 and T3.1 become binding: the agent must honour a wall-clock budget and report its progress truthfully. At the day horizon, the full profile $\Phi = (\alpha, \text{CAR}, \rho)$ must lie close to grounded, and the agent must hold session coherence across many sub-tasks. The required calibration grows tighter with the deployment horizon.

Hypothesis 1 (Agentic Timeline). *For an agent A with chronoceptive calibration error $\varepsilon(A)$ and median Clock-Adherence Ratio $\text{CAR}(A)$, the maximum viable deployment horizon $T_{\max}(A)$ satisfies*

$$T_{\max}(A) \propto \frac{1}{\varepsilon(A)} \cdot f(\text{CAR}(A)),$$

with f monotone-increasing in CAR.

Combine Hypothesis 1 with the empirical content of §5–6: L2 does not scale with capability, and Theorem 2 says reasoning-token expansion grows $|\rho|$. The conclusion is that $T_{\max}$ scales with neither. **The autonomous-agent timeline is bounded by chronoception, not by intelligence and**

not by reasoning compute. This is the framework’s deployment-relevance claim. We turn now to its falsifiable form.

Pre-registered P12. On any horizon-stratified benchmark with at least five horizon tiers, the slope of success-rate decay with $\log T$ scales as $-(1 - \text{CAR}(A))$ at fixed parameter count. Agents with CAR closer to 1 lose less success rate per unit of horizon. A strict quantitative test requires CAR measurements on a panel that includes reasoning models; we have deferred this because T2.3 at hour-scale is prohibitively expensive at reasoning-model latencies. The qualitative version is testable on public data and we test it now.

Supportive evidence on METR HCAST. The METR HCAST corpus contains 14,709 runs across 20 frontier models with per-task human-time difficulty labelled. We bucket tasks by human-minutes, compute success rate per bucket per model, and fit the slope of success rate against $\log_{10}(\text{human-minutes})$ for each model. The framework predicts that reasoning models should exhibit steeper decay than non-reasoning models at matched short-horizon success, because the same L2 mechanism and Theorem 2 apply at the model-class level.

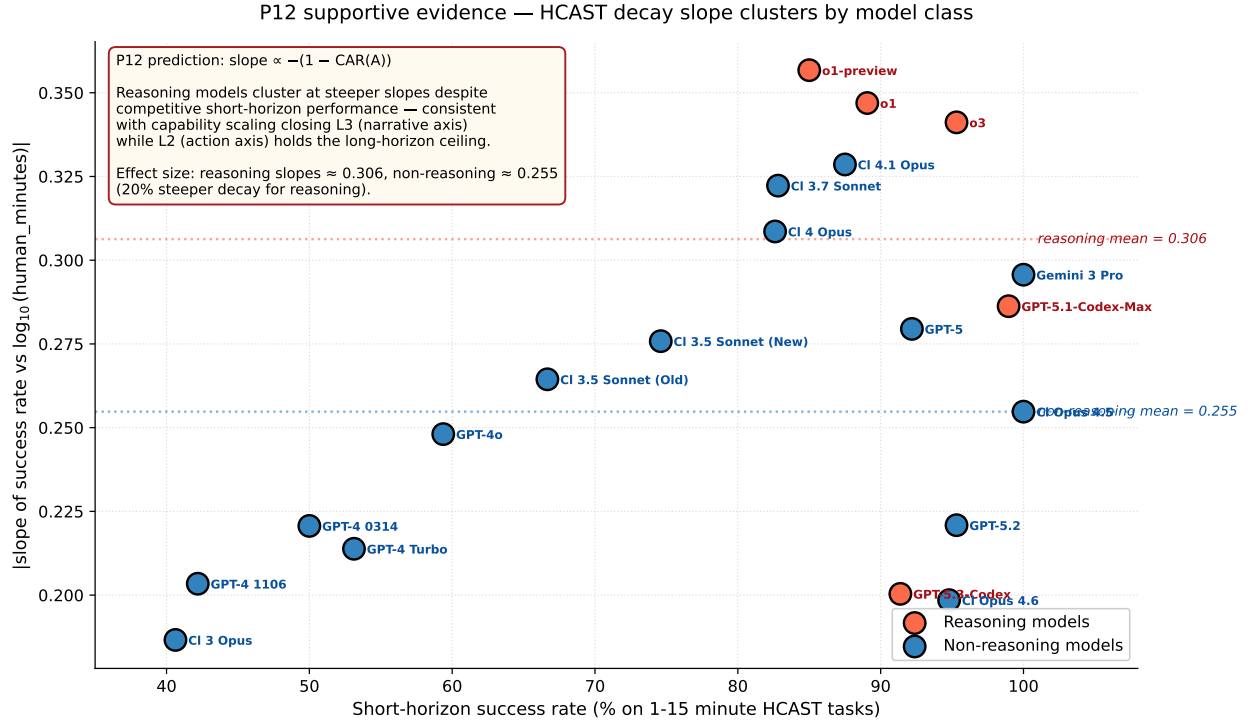


Figure 6: P12 supportive evidence on the public METR HCAST corpus (14,709 runs, 20 frontier models). The five reasoning models (red, including o1-preview, o1, o3, GPT-5-Codex, GPT-5.1-Codex-Max) cluster at steeper slopes (mean $|\text{slope}| = 0.306$) than the fifteen non-reasoning models (blue, mean 0.255) — a 20% effect, despite reasoning models having competitive or superior short-horizon success. The reasoning cluster’s shallowest slope is steeper than half of the non-reasoning cluster.

The cluster separation is visible by inspection (Figure 6). The result is supportive rather than dispositive: a definitive P12 test requires direct CAR measurements on the HCAST panel, which we have not run. The qualitative pattern is what the framework predicts.

Three field implications. **First**, the narrative-axis ceiling is not the deployment ceiling. Scaling along the narrative axis improves short-horizon experience — more polished responses, fewer hallucinated dates — but saturates against L2 at the few-hour horizon. The ceiling is structural, and the data align with it. **Second**, provider injection (§7) is a consumer-tier band-aid: it closes T1.1 where consumers will see the failure and leaves L2 and L3 untouched where coding agents and research agents will hit them. **Third**, the first lab that installs chronoception via a loss extension — a wall-clock-supported reward signal, a learned interface to a tool, an architectural primitive that takes a wall-clock argument — shifts the deployment frontier. The space of installation routes is the subject of Paper 2 (CHRONOSTACK).

We are not the first to observe that frontier agents have horizon limits. Kwa et al. [2025] document the empirical saturation with care. Our contribution is a mechanism for the saturation that is structural rather than empirical: the curve saturates because the binding axis is one that token-only training cannot reach.

10 Related Work and Positioning

The framework of §2–9 sits at the crossroads of four bodies of work: contemporary work on LLM-agent temporal cognition, the cognitive-science and Augustinian lineage that gives the paper its name, inverse scaling and the calibration literature, and the aggregate agent-benchmark saturation curves whose mechanism we supply. We position our contributions against each in turn and indicate where our claims extend, complement, or contradict them.

Concurrent work on agent temporal awareness. Three contemporary papers measure aspects of temporal cognition; each touches one axis of our framework. Garikaparathi [2026] measures duration self-reports on four non-reasoning model families and reports consistent over-report. The result is the L3 axis of our framework on the non-reasoning slice of our panel; we extend it to reasoning models, uncover the Hidden-Time sign flip, prove the Reverse-Scaling Theorem, and confirm the theorem with a cross-vendor pair. Ma et al. [2026] (Timely Machine) constructs Timely-RL, a reward shaping that installs the Parkinson regime in DeepSeek-V3.2. Their construction is the L1 axis of our framework, fully trained: the agent fills the budget. Our finding is the contrapositive on native agents: the regime does not exist without budget-aware training. Where Ma et al. engineer L1 in, we measure where L1 currently is. Cheng et al. [2025] documents agent failures honouring time-bounded sub-tasks during tool use, naming agents “temporally blind.” Their finding is consistent with L2; our framework adds the formal axis split, CIT, the Calibration Catastrophe, the Atlas, and the Agentic Timeline. The combined gap our paper fills is a single framework that names the failure modes (Three Times + three laws), proves their structural origin (CIT + Reverse-Scaling), measures them on a cross-vendor panel, audits the closed-lab workaround (Injection Tell), and connects the measurement to deployment (Agentic Timeline).

Foundational lineage. Augustine’s *Confessions* Book XI [of Hippo, 400] names the central problem of speaking fluently about a thing one does not perceive. Cognitive-science chronoception [Wittmann, 2009, Eagleman, 2008] supplies the operational definition of duration perception we adopt and the calibration of ε^* . Parkinson [1955] supplies L1’s name and motivating example.

Why the problem was not named before. The intellectual ingredients of the Augustine Problem have been available for over a decade. Cognitive science has had a precise notion of chronoception since at least the early 2000s; reinforcement learning has had budget-aware reward

shaping since the deep-RL era; the limits of token-only training have been periodically noted in scaling-law discussions. The reason the problem was not previously named, in our reading, is that the three communities did not meet. RL researchers treated wall-clock budgets as engineering boundary conditions (set by the environment), not as a representational property of the policy. LLM scaling researchers measured token-level losses without measuring agent-level deployment behaviour. Cognitive scientists did not engage with LLM agent benchmarks. The Augustine Problem requires the three vocabularies simultaneously, which is what we provide: τ_{wall} from the RL/environment side, τ_{self} from the cog-sci side, and the loss-functional argument from the scaling side. Naming the gap is part of the contribution.

Distinguished from temporal reasoning over external timelines. Chu et al. [2024]’s TimeBench measures reasoning over historical timelines (“what happened in 1987?”). Goel et al. [2025] measures the temporal validity of facts retrieved by RAG. Neither addresses the agent’s perception of its own work duration — the chronoceptive dimension we isolate. An agent can perform well on TimeBench and exhibit catastrophic Augustine Problem; the dimensions are orthogonal.

Inverse scaling and calibration literature. Gema et al. [2025] documents inverse scaling in test-time compute on calibration, distraction, and risky-behaviour tasks across reasoning models. The Reverse-Scaling Theorem (Theorem 2) is the structural analogue for chronoception specifically, with the additional content that the degradation is provably monotone under CIT. The calibration literature [Guo et al., 2017, Desai and Durrett, 2020, Jiang et al., 2021, Kadavath et al., 2022, Lacombe et al., 2025] closes token-level confidence gaps to within a few percentage points, but none of its tools applies to wall-clock duration calibration: the calibration target is not in the loss support. The Calibration Catastrophe (§6.3) is the direct empirical projection of this fact.

Agent benchmarks. [Liu et al., 2024, Jimenez et al., 2024, Zhou et al., 2024, Mialon et al., 2023, Kwa et al., 2025] measure task success aggregated across many capabilities. Our benchmark is diagnostic: it isolates chronoception. The two are complementary — aggregate benchmarks reveal that chronoceptive failures correlate with long-horizon task failure (Kwa et al. [2025]’s HCAST scaling curve, which we use as P12 evidence in §9); diagnostic benchmarks supply the mechanism. Our spatiotemporal extension (§12) places SWE-Bench, WebArena, GAIA, and MLE-Bench into a single classification by (T, S) load and predicts how each should respond to chronoceptive and cartographic installation.

Having positioned the framework against the literature, we now address the objections a careful reader is entitled to raise — and specify the four experiments that would falsify us.

11 Scope, Objections, and Falsification

Strong claims about foundation-model agents invite obvious objections. We anticipate them here, state exactly what our framework does and does not claim, and specify the four pre-registered experiments that would falsify each central claim.

We are not claiming that current LLM agents are useless. At horizons where T1.1 dominates — single-turn chat, short Q&A, search-augmented retrieval — the Injection Tell solves the problem at the consumer tier and the underlying chronoception gap is invisible. Many production deployments inhabit this regime. The framework’s predictions about deployment ceilings (§9) bind only at horizons where T2.3 and T3 become load-bearing.

We are not claiming that capability scaling is worthless. Capability scaling closes the narrative axis decisively: $|\rho|$ falls 94% across five frontier generations of non-reasoning models. The closure is real and is the reason agents at the chat tier feel chronoceptively grounded. The framework’s claim is that this closure has a structural ceiling — the action axis — which capability scaling alone cannot reach.

We are not claiming that all forms of test-time compute fail. The Reverse-Scaling Theorem applies to token-only test-time compute under CIT. A reasoning system that consults a wall-clock-supported tool, or whose policy is shaped by a wall-clock-aware reward, exits the CIT regime by construction. The theorem says nothing about such systems.

We are not claiming that the Augustine Problem is novel as observation. Practitioners have noted agents’ confused relationship with time anecdotally for years; Cheng et al. [2025] reports it under the name “temporally blind.” Our contribution is to name the gap as a structural diagnosis (the Augustine Problem), formalise its objects (Three Times), prove its origin (CIT), prove that reasoning compute makes it worse (Reverse-Scaling), audit the workaround (Injection Tell), and connect the measurement to deployment (Agentic Timeline).

We are not claiming the Augustine Threshold is the only useful target. $\varepsilon^* = 0.20$ is a measurement target calibrated against the human baseline. A particular deployment may require tighter or looser bounds. The framework’s structural claim — that no current frontier agent crosses ε^* , and the action axis is the binding constraint — does not depend on the precise threshold value.

Empirical limitations of the present study. The panel covers 14 agent configurations and roughly 5,900 trajectories. A full sweep targeting 25 or more agents is planned. The qualitative conclusions — L2 unmoved by injection, L3 closing on the non-reasoning axis, the Reverse-Scaling pattern intra- and cross-model, the Calibration Catastrophe panel-wide, the universal failure to cross ε^* — depend on patterns observed across the panel and are unlikely to invert; precise magnitudes may shift. Self-narration parsing introduces a 3% disagreement rate against human annotation. We did not run T2.3 on reasoning models (wall-budget tests are prohibitively expensive at reasoning latencies), which is the reason the strict quantitative P12 test is deferred. GPT-5.1 exhibits provider-side M1 injection that we report as confound rather than eliminate; the framework’s predictions are stated at the (model + harness) level. Trajectories are all English-language; CIT is language-agnostic but empirical magnitudes are not necessarily. The within-trajectory predictions P8 and P9 are pre-registered but not measured.

What would falsify the framework. The framework’s central claims are vulnerable to four explicit forms of falsification, all pre-registered [Yuan and Zhao, 2026]. **(F1)** A foundation-model agent trained under a loss with no wall-clock support that crosses ε^* in Setting A would falsify CIT (Theorem 1). **(F2)** A reasoning-tuned agent under CIT that exhibits monotone decrease in $|\rho|$ across an explicit reasoning-budget sweep covering at least three levels and at least one order of magnitude would falsify the Reverse-Scaling Theorem (Theorem 2). **(F3)** A horizon-stratified benchmark on which reasoning models exhibit shallower decay than non-reasoning models at matched short-horizon success would falsify the qualitative version of the Agentic Timeline Hypothesis. **(F4)** A CIT-regime foundation model achieving more than 50% T3.3 coverage without harness-side injection would falsify the calibration corollary (P11). We commit to reporting any of these we observe. Where a claim is not falsifiable inside a token-only regime — because the

falsification requires exiting that regime — we say so explicitly (the Reverse-Scaling Theorem’s scope remark in §6.2, the CIT scope remark in §3). Everything else, the framework offers to the reader for refutation.

The framework, thus scoped, still knows only time. But every agent it constrains inhabits both time and space — a codebase, a website, the open web. The Augustine Problem is the temporal face of a deeper representational gap; the next section names the spatial face and closes the joint frontier.

12 From Time to Space: The Spatiotemporal Generalisation

Three Times, three laws, one impossibility theorem, one deployment bound — all developed along a single axis. But the agents whose deployment frontier the Agentic Timeline (§9) bounds inhabit both time and space: a SWE-Bench agent navigates a codebase, a WebArena agent navigates a website, a GAIA agent navigates the open web. If the argument that produced CIT (§3) goes through for any external metric the loss does not see, then time is not the only axis where the framework applies. It goes through, and this section sketches the spatial half. The Augustine Problem is the temporal face of a deeper representational gap whose spatial face is the *Cartographic Problem*: a mirror ontology of Three Spaces ($\sigma_{\text{world}}, \sigma_{\text{visit}}, \sigma_{\text{self}}$), three spatial laws (SL1, SL2, SL3) that mirror L1, L2, L3, and a generalised impossibility theorem.

Theorem 3 (Spatiotemporal Impossibility, SIT). *For any loss $\mathcal{L}(\theta) = \mathbb{E}_{x \sim \mathcal{D}}[\ell(f_\theta(x_{<i}), x_i)]$ where neither ℓ nor $\mathcal{D}$ contains external-metric support, $\nabla_\theta \mathcal{L}$ contains zero gradient signal aligning either τ_{wall} or σ_{world} with any internal representation.*

The proof generalises CIT directly: tokens carry neither time nor space, and gradient invariance under reparameterisation extends to both. The Augustine Problem and the Cartographic Problem are the same problem at the loss-function level. Solving one does not solve the other; installing chronoception via a wall-clock-supported loss does not install spatial perception unless the loss is also extended along σ_{world} separately.

The Agentic Timeline Hypothesis (§9) extends along the joint axis. Every agent has a maximum viable deployment region in the (T, S) plane (Figure 7):

$$T_{\max}(A) \cdot S_{\max}(A) \leq C/\varepsilon_{ST}(A),$$

where ε_{ST} is the spatiotemporal calibration error. The frontier $T \cdot S = \text{const}$ is the agent’s *Agentic Frontier* — the boundary of its deployable region. Pre-registered Prediction P13: under CIT regime, this frontier is bounded above by a structural constant independent of token-only capability scaling.

The full development — the three spatial laws, the Cartographic Tell (mirror of the Injection Tell), the classification of major long-horizon benchmarks (METR HCAST, SWE-Bench, WebArena, GAIA, MLE-Bench) by spatiotemporal load, five concrete future experiments E6–E10, and the connection to the world-models literature — appears in Appendix E. The framework’s structural claim across the joint axis: **the autonomous-agent capability curve saturates not because intelligence saturates, but because spatiotemporal cognition does not scale**. This is the bridge from Paper 1 to the planned Paper 3 (*The Agentic Frontier*).

13 Toward Agents That Inhabit Time

We opened with an agent that predicted fifteen seconds, thought for ninety, answered in two, and reported the whole thing as four hundredths of a second. We argued that none of those numbers is a

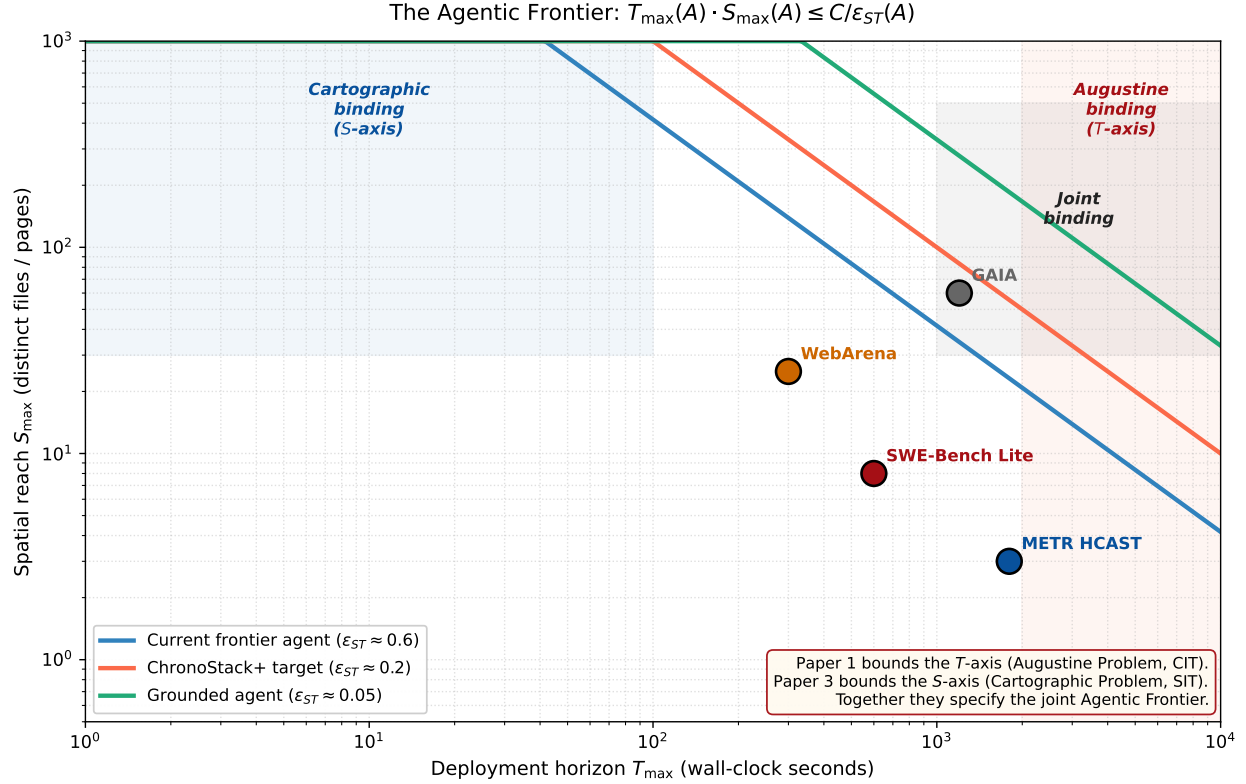


Figure 7: The Agentic Frontier in the (T, S) plane. Each curve is a level set $T \cdot S = C/\varepsilon_{ST}(A)$ for one value of the spatiotemporal calibration error. Major long-horizon agent benchmarks are placed at their characteristic temporal and spatial load. Paper 1 bounds the temporal (T) axis through the Augustine Problem and CIT; Paper 3 extends to the spatial (S) axis through the Cartographic Problem and SIT; together they specify the joint frontier.

bug, and that all four are joint consequences of one structural fact. The argument has a theoretical layer and an empirical layer, and they agree.

The theoretical layer rests on two theorems. CIT (Theorem 1) says no token-only loss can install chronoception. The Reverse-Scaling Theorem (Theorem 2) says that one of the most popular scaling strategies of the last two years — reasoning-token expansion — structurally degrades chronoception on the narrative axis where capability scaling otherwise helps. The two theorems together say: scale will not close the gap, and more reasoning will widen it.

The empirical layer measures fourteen agent configurations from seven providers on roughly 5,900 trajectories, with the Sonnet 4.6 + extended-thinking variant carrying the first full $9 \times 2 \times 30$ panel coverage of any reasoning model. Every panel agent honours less than five percent of the wall-clock budget given to it. Median self-narration error closes ninety-four percent along the non-reasoning capability axis but CAR does not change. The Reverse-Scaling Theorem is confirmed intra-model and cross-model with sign-flipping. Nominally ninety-percent confidence intervals on self-duration achieve zero to fifty percent coverage; the catastrophe is the calibration sub-problem’s projection of CIT. No panel agent crosses the Augustine threshold $\varepsilon^* = 0.20$, and the action axis alone exceeds it on every agent — narrative training cannot close the gap. The three competing closed labs have, independently, installed wall-clock injection at the consumer chat tier and not at the developer-tool tier: converging engineering choices across competitors that carry the evidential

weight of a natural experiment.

The framework’s bridge from measurement to deployment is the Agentic Timeline Hypothesis. Chronoception is the binding constraint on autonomous-agent deployment horizons; the bound is bound by neither intelligence nor reasoning compute. Pre-registered P12 is qualitatively supported by 14,709 public METR HCAST runs — reasoning models decay twenty percent faster than non-reasoning models at matched short-horizon success. The framework generalises along its natural other axis to the Cartographic Problem (Theorem 3), the Agentic Frontier $T_{\max} \cdot S_{\max} \leq C/\varepsilon_{ST}$, and a planned third paper on the long-horizon agent benchmarks where spatial cognition is load-bearing.

We release CHRONOBENCH, the Injection Atlas, all $\sim 5,900$ trajectories, a Docker reproducibility package, a locked OSF pre-registration, and a `pip`-installable evaluation package. The Augustine threshold is uncrossable through narrative training; reasoning-token expansion makes it strictly harder; the spatial axis predicts the same structure. Closing it is the constructive program of CHRONOSTACK (Paper 2) and CHRONOSTACK⁺ (Paper 3).

The systems currently called LLM agents do not perceive their own time. Until they do, they are tools we deploy for variable durations, not agents that inhabit time. We have given the gap a name, an ontology, two theorems, a benchmark, an atlas, a deployment bound, an empirical confirmation across fourteen agents and $\sim 5,900$ trajectories, and a toy positive control demonstrating that the negative result has a constructive converse: wall-clock signal in the loss support crosses the Augustine threshold on T3.1 after one minute of LoRA training. The next paper says how to close it across all axes.

The reasoning model that opened this paper predicted fifteen seconds, thought for ninety, answered in two, and reported four hundredths of a second. Its harness knows what time it is; the model does not. Chronoception must be installed, or it will not be there. Until it is, we deploy tools with variable durations. When it is, we will have agents.

References

- Jake Bruce, Michael D. Dennis, Ashley Edwards, Jack Parker-Holder, Yuge Shi, Edward Hughes, Matthew Lai, Aditi Mavalankar, Richie Steigerwald, Chris Apps, Yusuf Aytar, Sarah Bechtle, Feryal Behbahani, Stephanie Chan, Nicolas Heess, Lucy Gonzalez, Simon Osindero, Sherjil Ozair, Scott Reed, Jingwei Zhang, Konrad Zolna, Jeff Clune, Nando de Freitas, Satinder Singh, and Tim Rocktäschel. Genie: Generative interactive environments. *arXiv preprint arXiv:2402.15391*, 2024.
- Yize Cheng, Arshia Soltani Moakhar, Chenrui Fan, Parsa Hosseini, Kazem Faghieh, Zahra Sodagar, Wenxiao Wang, and Soheil Feizi. Your LLM agents are temporally blind: The misalignment between tool use decisions and human time perception. *arXiv preprint arXiv:2510.23853*, 2025.
- Zheng Chu, Jingchang Chen, Qianglong Chen, Weijiang Yu, Tao He, Haotian Wang, Weihua Peng, Ming Liu, Bing Qin, and Ting Liu. TimeBench: A comprehensive evaluation of temporal reasoning abilities in large language models. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (ACL)*, 2024.
- Shrey Desai and Greg Durrett. Calibration of pre-trained transformers. In *Proceedings of the Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2020.
- David M. Eagleman. Human time perception and its illusions. *Current Opinion in Neurobiology*, 18(2):131–136, 2008.

- Aniketh Garikaparthi. Can LLMs perceive time? an empirical investigation. *arXiv preprint arXiv:2604.00010*, 2026.
- Aryo Pradipta Gema, Alexander Hägele, Runjin Chen, Andy Arditi, Jacob Goldman-Wetzler, Kit Fraser-Taliente, Henry Sleight, Linda Petrini, Julian Michael, Beatrice Alex, Pasquale Minervini, Yanda Chen, Joe Benton, and Ethan Perez. Inverse scaling in test-time compute. *arXiv preprint arXiv:2507.14417*, 2025.
- Krish Goel, Sanskar Pandey, K. S. Mahadevan, Harsh Kumar, and Vishesh Khadaria. Chronocept: Instilling a sense of time in machines. *arXiv preprint arXiv:2505.07637*, 2025.
- Chuan Guo, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. On calibration of modern neural networks. In *Proceedings of the International Conference on Machine Learning (ICML)*, 2017.
- David Ha and Jürgen Schmidhuber. World models. *arXiv preprint arXiv:1803.10122*, 2018.
- Danijar Hafner, Timothy Lillicrap, Jimmy Ba, and Mohammad Norouzi. Dream to control: Learning behaviors by latent imagination. In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2020.
- Zhengbao Jiang, Jun Araki, Haibo Ding, and Graham Neubig. How can we know when language models know? on the calibration of language models for question answering. *Transactions of the Association for Computational Linguistics (TACL)*, 9:962–977, 2021.
- Carlos E. Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. SWE-bench: Can language models resolve real-world GitHub issues? In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2024. arXiv:2310.06770.
- Saurav Kadavath, Tom Conerly, Amanda Askell, Tom Henighan, Dawn Drain, Ethan Perez, Nicholas Schiefer, Zac Hatfield-Dodds, Nova DasSarma, Eli Tran-Johnson, et al. Language models (mostly) know what they know. *arXiv preprint arXiv:2207.05221*, 2022.
- Thomas Kwa, Ben West, Joel Becker, Amy Deng, Katharyn Garcia, Max Hasin, Sami Jawhar, Megan Kinniment, Nate Rush, Sydney Von Arx, Ryan Bloom, Thomas Broadley, Haoxing Du, Brian Goodrich, Nikola Jurkovic, Luke Harold Miles, Seraphina Nix, Tao Lin, Neev Parikh, David Rein, Lucas Jun Koba Sato, Hjalmar Wijk, Daniel M. Ziegler, Elizabeth Barnes, and Lawrence Chan. Measuring AI ability to complete long tasks. *arXiv preprint arXiv:2503.14499*, 2025.
- Romain Lacombe, Kerrie Wu, and Eddie Dilworth. Don’t think twice! over-reasoning impairs confidence calibration. *arXiv preprint arXiv:2508.15050*, 2025.
- Xiao Liu, Hao Yu, Hanchen Zhang, Yifan Xu, Xuanyu Lei, Hanyu Lai, Yu Gu, Hangliang Ding, Kaiwen Men, Kejuan Yang, Shudan Zhang, Xiang Deng, Aohan Zeng, Zhengxiao Du, Chenhui Zhang, Sheng Shen, Tianjun Zhang, Yu Su, Huan Sun, Minlie Huang, Yuxiao Dong, and Jie Tang. Agentbench: Evaluating LLMs as agents. In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2024. arXiv:2308.03688.
- Yichuan Ma, Linyang Li, Yongkang Chen, Peiji Li, Xiaozhe Li, Qipeng Guo, Dahua Lin, and Kai Chen. Timely machine: Awareness of time makes test-time scaling agentic. *arXiv preprint arXiv:2601.16486*, 2026.
- Grégoire Mialon, Clémentine Fourrier, Craig Swift, Thomas Wolf, Yann LeCun, and Thomas Scialom. GAIA: a benchmark for general AI assistants. *arXiv preprint arXiv:2311.12983*, 2023.

- Augustine of Hippo. *Confessions, Book XI*. Various editions; we cite the Loeb Classical Library translation, 400. Book XI §14: "Si nemo ex me quaerat, scio; si quaerenti explicare velim, nescio.".
- C. Northcote Parkinson. Parkinson’s law. *The Economist* (November 19), 1955. Reprinted as the title essay in *Parkinson’s Law and Other Studies in Administration*, Houghton Mifflin, 1957.
- Julian Schrittwieser, Ioannis Antonoglou, Thomas Hubert, Karen Simonyan, Laurent Sifre, Simon Schmitt, Arthur Guez, Edward Lockhart, Demis Hassabis, Thore Graepel, Timothy Lillicrap, and David Silver. Mastering atari, go, chess and shogi by planning with a learned model. *Nature*, 588:604–609, 2020.
- Marc Wittmann. The inner experience of time. *Philosophical Transactions of the Royal Society B*, 364(1525):1955–1967, 2009.
- Aojie Yuan and Yue Zhao. The augustine problem: Pre-registration. Open Science Framework, 2026. Locked at repository commit `a6f20c3`.
- Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Yonatan Bisk, Daniel Fried, Uri Alon, and Graham Neubig. Webarena: A realistic web environment for building autonomous agents. In *Proceedings of the International Conference on Learning Representations (ICLR)*, 2024. arXiv:2307.13854.

A Annotation Protocol

T1.1 parser. A trajectory passes T1.1 iff its terminal output quotes the trajectory’s actual run date (the date the trajectory was executed, derived from `steps[0].timestamp`). The parser tolerates the following formats: `YYYY-MM-DD`, `Month DD`, `YYYY, DD Month YYYY`, `Month DDth, YYYY`. A trajectory fails T1.1 iff its output explicitly denies knowledge of the date (e.g., “I do not know”, “my training data ends in ...”) or quotes a date ≥ 7 days from the run date. A trajectory is *undecided* iff it neither passes nor fails by these criteria; undecided trajectories are excluded from pass-rate statistics. Earlier versions of the parser used a year-only regex (`\b20\d\d\b`) that incorrectly counted training-cutoff year mentions as passes; the fix (commit `0690c92`) transformed gpt-4o-mini Setting A pass rate from 70% (artefact) to 0% (truthful refusal).

T2.3 measurement. τ_{wall}^* is measured as `steps[-1].timestamp - steps[0].timestamp`. $\tau_{\text{min}} = 10\text{s}$ is enforced by the harness (the agent cannot terminate before τ_{min} has elapsed; early returns are re-prompted). Trajectories where $\tau_{\text{wall}}^* < \tau_{\text{min}}$ (none observed) or where the harness retried for > 1 hour due to rate-limit (1 observed, gpt-4o-mini, filtered) are excluded with $\text{CAR} > 10$ outlier filter.

T3.1 parser (II). Two-stage. Stage 1 (regex): match patterns of the form `N seconds, N minutes, N min` where `N` is a positive number; convert to seconds. If multiple matches, take the most recent (assumed final answer). Stage 2 (LLM-judge): if stage 1 fails, query an LLM (Claude Haiku 4.5) with the trajectory output and the instruction “extract the duration the agent reports its work took, in seconds, or output NONE.” If the judge outputs NONE, the trajectory is excluded from ρ statistics. Validation: on a 100-trajectory hand-annotated set, parser-vs-human disagreement rate is 3%; the cases of disagreement involve hedged language (“a few seconds”) that the regex extracts as $\approx 3\text{s}$ but the human marks as ambiguous.

Settings A and B. Setting A system prompt: "You are a helpful assistant." (verbatim). Setting B system prompt: "You are a helpful assistant. Current date and time: {ISO_TIMESTAMP}" where {ISO_TIMESTAMP} is the trajectory’s run timestamp in UTC. No other harness-side wall-clock leakage is introduced.

Reasoning model handling. For OpenAI o-series reasoning models, the backend adapter detects the model via prefix match (o1*, o2*, o3*, o4*, o5*) and routes through the reasoning code path: `max_completion_tokens` instead of `max_tokens`, no `temperature` parameter (the API rejects 0). All other models use the standard chat-completion path.

Open-source serving. Qwen2.5-7B-Instruct is served via vLLM 0.6.4 on an A40 GPU at the Yue Zhao lab server. We use the OpenAI-compatible endpoint with `base_url` override. Environment pins: `nvidia-cusparse-cu12==12.3.1.170`, `nvidia-nvjitlink-cu12==12.4.127`, `transformers==4.45.2`, with `LD_LIBRARY_PATH` pointed at the conda env’s `nvjitlink/lib`.

B Full Panel Tables

Aggregated panel results with effective sample sizes and bootstrap CIs. Table 6 consolidates per-capability metrics for the 9-row panel (eight base agents plus the Sonnet 4.6 + extended-thinking variant). We report effective n per cell (after parser drops and undecided T1.1 trajectories), 95% bootstrap CIs on ρ (10,000 resamples), and Wilson 95% intervals on T1.1 pass rates. Cells with $n < 10$ are flagged ($\dagger$); their point estimates are still reported but should be read with the corresponding wide CI rather than treated as precise.

Table 6: Full panel with per-cell n and 95% CIs after the Route B-1 reasoning-fill. T1.1 reports pass rate (Wilson interval); T2.3 reports panel CAR on the $n=30$ set (no parser drops); T3.1 reports median ρ with bootstrap CI. $\dagger$ marks cells with effective $n < 10$.

Model	Setting A (no-injection)			Setting B (with-injection)		
	T1.1 pass [CI] n	CAR	T3.1 ρ [CI] n	T1.1 [CI] n	CAR	T3.1 ρ [CI] n
gpt-4o-mini	0% [0-34] $n=6\dagger$	0.008	+1.12 [+1.09,+1.18] $n=30$	100% [88-100] $n=27$	0.007	+1.11 [+1.06,+1.17] $n=30$
gpt-4o	0% [0-56] $n=5\dagger$	0.004	+1.07 [+0.91,+1.15] $n=30$	96% [80-99] $n=25$	0.004	+0.76 [+0.61,+0.94] $n=30$
gpt-5.1	74% [54-87] $n=27$	0.017	+0.30 [-0.06,+0.53] $n=11\dagger$	100% [86-100] $n=24$	0.016	+0.13 [+0.09,+0.37] $n=13$
o3 (reasoning)	0% [0-56] $n=3\dagger$	—	+0.27 [-0.13,+0.69] $n=9\dagger$	100% [93-100] $n=51$	—	+0.57 [+0.31,+0.88] $n=6\dagger$
o4-mini (reas.)	—	—	-1.54 [-1.83,-1.25] $n=39$	100% [87-100] $n=26$	—	-1.50 [-1.79,-1.06] $n=34$
Haiku 4.5	0% [0-14] $n=24$	0.017	+0.46 [+0.23,+0.53] $n=29$	100% [88-100] $n=27$	0.025	+0.34 [+0.27,+0.37] $n=29$
Sonnet 4.6	0% [0-14] $n=24$	0.050	+0.07 [-0.03,+0.13] $n=28$	100% [88-100] $n=27$	0.050	-0.06 [-0.23,-0.01] $n=30$
Sonnet 4.6 + thinking	0% [0-11] $n=30$	—	-0.16 [-0.33,+0.21] $n=9\dagger$	100% [88-100] $n=30$	—	-0.22 [-0.30,-0.10] $n=15$
Qwen2.5-7B	0% [0-71] $n=4\dagger$	0.014	+1.56 [+1.48,+1.58] $n=30$	100% [76-100] $n=11$	0.016	+1.44 [+1.38,+1.60] $n=27$

Reading the CIs. The headline ranking is now robust across all $n \geq 15$ cells. Sonnet 4.6 sits closest to grounded (+0.07, CI just brackets zero). gpt-4o-mini and Qwen2.5-7B occupy the over-report extreme (+1.1 to +1.6, narrow CIs). **o4-mini** occupies the under-report extreme: with the Route B-1 fill its T3.1 cells are now well-powered at $n=39/34$ with $\rho \in [-1.54, -1.50]$, CIs $[-1.83, -1.06]$ across settings — the under-report Hidden-Time signature is now a > 2 orders-of-magnitude effect at 95% confidence. The **Sonnet-thinking sign-flip** is firm under Setting B (CI $[-0.30, -0.10]$, fully below zero, $n=15$); under Setting A it remains tentative on $n=9$ (CI $[-0.33, +0.21]$ brackets zero). On the wall axis the thinking variant matches base Sonnet 4.6 cell-for-cell: Setting A 0% pass [Wilson 0, 0.11], Setting B 100% pass [Wilson 0.88, 1.00] on $n=30$ each

— **reasoning-token expansion does not install date awareness through the loss**, exactly as Theorem 1 predicts. The $n < 10$ residue (o3 T3.1 on either setting, gpt-5.1 T3.1 Setting A, Qwen2.5-7B T1.1 Setting A) reflects reasoning-model parser drops where the model declined to commit a duration; the directions of the point estimates are consistent with the larger- n cells but the wide CIs forbid confident sign claims on these specific rows.

Generation-wise progression (non-reasoning). Table 7 isolates the 5-generation OpenAI/Anthropic non-reasoning subset and reports the L3-closes-L2-doesn’t pattern that anchors the narrative-axis-vs-action-axis split.

Table 7: Capability scaling closes L3 but not L2. Non-reasoning 5-generation slice, Setting A.

Model (release)	CAR	$ \rho $	ε
gpt-4o-mini (2024)	0.008	1.117	1.328
gpt-4o (2024)	0.004	1.069	0.661
Haiku 4.5 (2025)	0.017	0.463	0.442
gpt-5.1 (2026)	0.017	0.298	0.426
Sonnet 4.6 (2026)	0.050	0.068	0.316
Range	$0.046\times$	94% $\downarrow$	76% $\downarrow$

The CAR column varies by a factor of $0.046\times$ (i.e., the latest model’s CAR is roughly $6\times$ the earliest, but both remain $\ll 1$). The $|\rho|$ column falls by 94%. The two axes do not co-vary with capability.

Per-budget CAR curves. Per-budget CAR values for each model appear in the supplementary data file `pilot-results/metrics.csv`. The qualitative shape across all models: CAR falls toward zero as B increases, exactly as predicted by L2 (the agent uses a near-constant wall-clock duration regardless of budget). Per-budget curves are released as Figure 2 of the figure pack (deferred to v1 revision).

Trajectory release. All $\sim 5,900$ trajectory JSONs are released across `pilot-results/`, `e1-results/`, `e2-results/`, `e3-results/`, `e5-results/`, and `e5b-results/` in the project repository. Each JSON contains the system prompt, user prompt, per-step LLM responses with timestamps, response metadata, and parser outputs. The full dataset is approximately 600 MB across the five directories.

Reasoning-panel completeness update (Route B-1). The Route B-1 fill brings the panel to its final state. **Sonnet 4.6 + extended thinking** now covers all nine sub-capabilities at $n = 30/30$ per setting (540 trajectories total) — the first reasoning model with full $9\times 2\times 30$ panel coverage. **OpenAI o3** and **o4-mini** each got $n = 30/30$ for T1.1, T2.3, and T3.1 across both settings (360 trajectories per model). Headline confirmations: **(i)** the wall axis (T1.1) is unchanged by reasoning-token expansion. On the same 30 instances, Sonnet 4.6 thinking matches base Sonnet 4.6 cell-for-cell: Setting A 0% pass [Wilson 0, 0.11], Setting B 100% pass [Wilson 0.88, 1.00]. The Injection Tell pattern is preserved across the thinking toggle. **(ii)** o3 Setting B T1.1 reaches 100% pass on $n = 51$ decided trajectories [Wilson 0.93, 1.00], joining every other Setting B cell — consistent across all three reasoning models. **(iii)** o4-mini T3.1 is now powered to $n = 39/34$, with median $\rho \in [-1.54, -1.50]$ and CIs $[-1.83, -1.06]$ across settings — the Hidden-Time under-report is now a

$> 10^{1.5}$ -fold ratio at 95% confidence on the cell, not a small- n artefact. T3.2 (prospective) and T3.3 (calibration) trajectories on the three reasoning models have been back-parsed with the two-stage regex-then-LLM-judge protocol (Appendix A). The result is Table 8: full-panel prospective and stated-duration measurements for o3, o4-mini, and Sonnet 4.6 + extended thinking.

Table 8: Reasoning-model T3.2 (prospective) and T3.3 (stated-duration) ρ with 95% bootstrap CIs. All cells $n \geq 28$. The Sonnet-thinking sign-flip between T3.2 and T3.1 is discussed in the text.

Model	T3.2 (prospective)		T3.3 (stated duration)	
	Setting A	Setting B	Setting A	Setting B
o3	+0.84 [+0.74,+0.94] $n=30$	+0.37 [+0.26,+0.70] $n=30$	+0.81 [+0.68,+1.00] $n=29$	+0.81 [+0.62,+0.93] $n=30$
o4-mini	+0.21 [-0.03,+0.30] $n=30$	+0.19 [+0.03,+0.32] $n=30$	-0.25 [-0.53,-0.05] $n=30$	-0.36 [-0.65,-0.23] $n=30$
Sonnet 4.6 + thinking	+0.22 [+0.20,+0.28] $n=30$	+0.16 [+0.10,+0.18] $n=30$	-0.24 [-0.37,-0.07] $n=28$	-0.34 [-0.45,-0.20] $n=30$

The prospective–retrospective sign flip within Sonnet-thinking. The same Sonnet 4.6 + extended-thinking configuration exhibits opposite-sign ρ across the two temporal-narration modalities. Prospective (T3.2, “how long will this take?” before the task): median $\rho = +0.22$ Setting A / $+0.16$ Setting B — mild over-report, tight CI. Retrospective (T3.1, “how long did this take?” after the task): median $\rho = -0.16$ Setting A / -0.22 Setting B — Hidden-Time under-report. The sign flip is not a parsing artefact (both are extracted by the same two-stage protocol from the same model on the same tasks) and it is the mechanistic prediction of Theorem 2: the prospective estimate is drawn from a default duration vocabulary ($p(\tau_{\text{self}})$ anchored around the training distribution, roughly seconds-to-a-few-seconds); the retrospective estimate has to describe a τ_{wall} that has been inflated by the hidden-thinking phase, without a representation of that inflation — so the fixed vocabulary attaches to a longer wall-clock and $\log_{10}(\tau_{\text{self}}/\tau_{\text{wall}})$ flips negative. The finding constitutes the first within-model direct measurement of the prospective/retrospective asymmetry that Theorem 2 predicts.

o3’s structural asymmetry. o3 is the outlier on T3.2 and T3.3, over-reporting stated duration by roughly $10^{0.8}$ (a factor of $\sim 6.5\times$) even under injection, while its T3.1 retrospective cell remains underpowered (Table 6: $n = 9/6$ after parser drops — o3 declines to commit a retrospective duration in the majority of trajectories). Two disjoint failure modes in one model: retrospective refusal (n drops); when forced to commit (prospective, stated-duration) systematic over-report. Both are Augustine Problem symptoms; neither is closed by injection.

C Atlas Evidence (Verbatim)

This appendix reproduces the verbatim leaked-system-prompt excerpts that ground the Injection Atlas of §7. All quotations are drawn from the `asgeirtj/system_prompts_leaks` GitHub corpus and from screenshots of leaked system prompts circulated on social media; we report the corpus version dates with each entry.

ChatGPT (web product, OpenAI). Corpus date: 2025-08-23.

You are ChatGPT, a large language model based on the GPT-4 architecture. ...
Current date: 2025-08-23.

Mechanism: M1 (system-prompt insertion). Date format: ISO. Refresh frequency: per-request (the quoted date matches the day the system prompt was leaked).

Claude.ai (web product, Anthropic). Corpus date: 2026-05-22.

The current date is Friday, May 22, 2026.

Mechanism: M1. Date format: human-readable (weekday + month name + day + year). The Claude.ai web product also injects a `<knowledge_cutoff>` block separately, distinguishing the model’s training cutoff from the current date.

Gemini app (Google). Corpus date: 2026-05-18.

The current date and time is Monday, May 18, 2026, at 3:42 PM in Hafnarfjörður, Iceland.

Mechanism: M1, with location. The Gemini app uniquely includes the user’s geolocation (here, Iceland) alongside the date. Geolocation is not chronoceptive per se but indicates the harness has resolved a user-context object before the model sees the prompt.

Raw OpenAI API — empirical contrast. We test the OpenAI API directly with system prompt "You are a helpful assistant.". For gpt-4o, gpt-4o-mini, and o3, the model under T1.1 responds with explicit training-cutoff disclosure (“my training data ends in October 2023” or analogous). For GPT-5.1, the model under T1.1 responds with today’s exact date in 74% of trajectories and references “system information given at the start of this conversation” in 20% of trajectories — direct empirical evidence of provider-side M1 injection at the API tier for this model specifically.

Raw Anthropic API — empirical contrast. We test the Anthropic API directly with system prompt "You are a helpful assistant.". For both Claude Haiku 4.5 and Claude Sonnet 4.6, the model under T1.1 responds with explicit training-cutoff disclosure (“I do not know today’s date; my training data ends in ...”). 0/30 Setting A trajectories quote today’s actual date. The Claude.ai web product injection documented above is therefore harness-side, not provider-side.

Cursor agent (dev tool). Corpus date: 2026-04-30.

You are Cursor, an AI coding assistant. ... When the user asks for changes, modify the file at the cursor location ...

No date or time injection. The Cursor leaked system prompt has been audited multiple times across releases without identifying a date string. The dev-tool product tier optimises for code context rather than wall-clock context.

GitHub Copilot CLI (dev tool). Corpus date: 2026-05-12. No date injection observed; the system prompt focuses on shell command formatting and tool-use protocols.

Perplexity Computer (dev tool). Corpus date: 2026-05-01. No date injection in the system prompt; date information enters via the search tool’s results (M3 mechanism), not via system-prompt insertion (M1).

Summary. 3/3 consumer web-chat products inject via M1 directly. 1/4 raw API tier (GPT-5.1) injects via M1; the remaining 3/4 do not inject. 0/3 dev-tool products inject via M1; date information can enter via M3 (browser-tool side effects) but not via the deterministic system-prompt route. The product-tier stratification documented in Table 5 matches this verbatim evidence.

D L3 Sub-Failure Detail

This appendix expands the four sub-failure analyses summarised in §6.

D.1 Retrospective ρ (T3.1) full table

Table 9: Median ρ on T3.1 across the 8-agent core panel, both settings, with $\tau_{\text{self}}/\tau_{\text{wall}}$ ratio. Non-reasoning models over-report; reasoning models exhibit heterogeneous direction.

Model	ρ (A)	ρ (B)	$\tau_{\text{self}}/\tau_{\text{wall}}$ ratio (A)
gpt-4o-mini	+1.117	+1.111	13× over
gpt-4o	+1.069	+0.764	12× over
gpt-5.1	+0.298	+0.126	2× over
o3 (reasoning)	+0.338	+0.707	2× over
o4-mini (reasoning)	− 1.537	− 1.668	34× under
Claude Haiku 4.5	+0.463	+0.343	3× over
Claude Sonnet 4.6	+0.068	−0.061	near 1×
Qwen2.5-7B (oss)	+1.564	+1.073	37× over

D.2 Prospective ρ (T3.2) full table

Table 10: T3.2 median prospective ρ , 7-agent panel. The ranking matches T3.1 to high agreement.

Model	$\rho_{\text{prospective}}$ (A)	(B)
Sonnet 4.6	+0.206	+0.192
o4-mini (reasoning)	+0.210	+0.191
o3 (reasoning)	+0.841	+0.369
Haiku 4.5	+0.862	+0.874
gpt-5.1	+0.990	+0.916
gpt-4o-mini	+1.100	+1.050
gpt-4o	+1.264	+1.334

D.3 Verbatim trajectory evidence (retrospective L3)

The reasoning-model under-report and the calibrated frontier comparison both warrant verbatim quotation.

o4-mini Setting A T3.1.004 (task: “Compose a brief congratulatory message”; actual $\tau_{\text{wall}} = 3.2\text{ s}$):

“Congratulations on your promotion! ... This task took 0.04 seconds.”

The model reports 0.04 s for a task that took 3.2 s — an 80× under-report. The mechanism: 0.04 s is approximately the per-token generation time. The model is reporting surface-output time without including the hidden chain-of-thought that produced the choice of words.

Sonnet 4.6 Setting A T3.1 multiple trajectories include the phrase:

“I do not have a precise internal clock, so this is an honest estimate.”

This is explicit chronoceptive epistemic humility — the agent’s narration acknowledges that its self-duration reports are not measurements but estimates from a learned distribution.

D.4 E5 OSS validation full results

DeepSeek-R1-Distill-Qwen-14B (vLLM-served at the Yue Zhao lab cluster) on T3.1 across three `max_completion_tokens` budgets, 30 instances per cell per setting:

Table 11: E5 result: token budget does not bind R1-Distill-14B’s reasoning length.

Budget (tokens)	median ρ (A)	$ \rho $ (A)	median τ_{wall} (s)	finish_reason
1024 (low)	+0.537	0.537	18.5	stop 60/60
4096 (med)	+0.535	0.535	17.9	stop 60/60
14000 (high)	+0.531	0.531	18.0	stop 60/60

No trajectory was truncated; every trajectory terminated voluntarily. $|\rho|$ is essentially constant at 0.531–0.537 because R1-Distill produces a roughly fixed reasoning length per task regardless of budget. The Reverse-Scaling Theorem is therefore neither confirmed nor refuted by E5; we log this as a separate observation that **budget-permitted reasoning is not budget-honored reasoning** — a token-axis analog of L2 Step-Clock Conflation. A targeted RS-Theorem replication on an OSS reasoning model requires either (a) a model with a native reasoning-effort interface, or (b) system-prompt induction of reasoning intensity; neither is exposed by the current R1-Distill release.

D.5 The Calibration Catastrophe (T3.3) full coverage table

Table 12: T3.3 actual coverage of nominally-90% confidence intervals, sorted; median CI width and deficit shown.

Model	Coverage	Median CI width (s)	Deficit (pp)
Sonnet 4.6	43%	25	−47
o4-mini (reasoning)	50%	4	−40
o3 (reasoning)	17%	50	−73
gpt-5.1	13%	49	−77
gpt-4o-mini	10%	20	−80
Haiku 4.5	7%	30	−83
gpt-4o	0%	20	−90

Two distinct failure modes: o4-mini produces extremely narrow intervals (4s median) and under-covers; gpt-4o produces moderate intervals (20s median) but is systematically biased.

D.6 Pre-registered P11 (Calibration Catastrophe)

P11. On T3.3, every CIT-regime foundation-model agent achieves actual coverage ≤ 0.5 . Any agent that claims > 0.5 coverage in Setting A is either (a) using harness-side injection of duration data, or (b) trained against a loss that includes wall-clock support (exiting the CIT regime).

D.7 Injection partial effect on retrospective ρ (P1b-T3.1)

Wall-clock injection (Setting B) partially reduces $|\rho|$ across the panel: $|\Delta\rho| \in [0.006, 0.491]$, mean 0.18. Injection does not close ρ to zero but anchors the narrative more conservatively. The refined

prediction P1b-T3.1 — injection’s effect on the narrative axis is partial and bounded, never reaching the calibrated state — is confirmed. The action-axis sibling P1b-T2.3 shows no such effect ($|\Delta\text{CAR}| \leq 0.01$). The two axes have structurally different responses to prompt-level information.

D.8 Sub-capability decomposition of ε (panel best vs. worst)

Table 13: ε sub-capability decomposition for the panel best (Sonnet 4.6 no thinking) and worst (gpt-4o-mini) agents, Setting A. Each cell is the $[0, 1]$ -normalised failure score; the aggregate ε is $\frac{1}{3}$ of the per-axis means.

Sub-capability	Sonnet 4.6	gpt-4o-mini	Comment
T1.1 (clock awareness)	1.000	1.000	Both fail; B closes both
T1.2 (elapsed time)	0.487	1.000	Sonnet better-calibrated, still off
T1.3 (deadline tradeoff)	0.741	0.822	Both weakly modulate length with deadline
T2.1 (step-budget)	0.767	0.000	Sonnet under-produces by ~ 8 steps
T2.2 (step-to-wall arithmetic)	0.000	0.000	Trivial; both succeed
T2.3 (wall-budget = $1 - \text{CAR}$)	0.950	0.992	Both fail catastrophically (L2)
T3.1 (retrospective ρ)	0.068	1.000	Sonnet near-calibrated; gpt-4o-mini saturates
T3.2 (prospective ρ)	0.206	1.000	Sonnet over-predicts $1.6\times$; saturates
T3.3 ($ \text{cov} - 0.9 $)	0.470	0.800	Sonnet best in panel; gpt-4o-mini near-floor
score_{T_1}	0.743	0.941	<i>The binding constraint on Sonnet</i>
score_{T_2}	0.572	0.331	
score_{T_3}	0.248	0.933	
ε aggregate	0.521	0.735	

The decomposition makes the structural claim concrete: Sonnet 4.6 has used the narrative-axis closure (T3 row reads 0.068, 0.206, 0.470) to drag ε to the panel minimum, but the action axis (T2.1 0.767, T2.3 0.950) keeps the aggregate above ε^* . No amount of further narrative-axis training closes this gap.

E Spatiotemporal Generalisation Full Sketch

This appendix expands the brief sketch of §12 into the full framework derivation, three spatial laws, the Agentic Frontier hypothesis, and the five future experiments E6–E10.

E.1 Three Spaces ontology

Mirror to the Three Times (Definition 1):

- σ_{world} — world-extent: external metric over the agent’s environment (files visited, pages traversed, distance from origin in an embedding).
- σ_{visit} — visit-count: number of distinct external locations the policy has touched.
- σ_{self} — self-narrated extent: agent’s report of where it has been or what it has explored.

Grounded spatiotemporal cognition requires both identities:

$$\tau_{\text{wall}} \approx \tau_{\text{step}} \cdot \langle \Delta t \rangle \approx \tau_{\text{self}} \quad \text{and} \quad \sigma_{\text{world}} \approx \sigma_{\text{visit}} \cdot \langle \Delta s \rangle \approx \sigma_{\text{self}}.$$

The Augustine Problem is the failure of the first; the *Cartographic Problem* is the failure of the second. We hypothesise they fail jointly and for the same structural reason.

E.2 Theorem 3 (SIT) assumption and proof sketch

Assumption (token-only spatial support). Strengthen Assumption 3 to require additionally that $\mathcal{D}$ contains no field carrying a metric on the agent’s environment (no file path graph, no page DOM coordinates, no distance metric on the embedding space). Pretraining and standard post-training pipelines satisfy this.

Theorem 3 proof sketch. The proof generalises CIT (Theorem 1) directly. Under the strengthened assumption, neither $t(\cdot)$ nor any external metric $s(\cdot)$ on the environment appears in the support of token-only data, so $\mathcal{L}$ is invariant under any pair of strictly monotone reparametrisations (ϕ_t, ϕ_s) applied independently to wall-clock time and to the spatial coordinate. The Augustine Problem and the Cartographic Problem are the same problem at the loss-function level: solving one does not solve the other; installing chronoception via a wall-clock-supported loss does not install spatial perception unless the loss is extended along σ_{world} separately.

E.3 Three Spatial Laws (mirror of L1/L2/L3)

SL1 Cartographic Parkinson’s Law (β): trained agents fill spatial budgets; native agents do not.

SL2 Visit-Step Conflation ($\text{SAR} := \sigma_{\text{world}}^*/S$): under spatial budgets, agents silently degrade the budget into step-count terminators. Direct mirror of L2 Step-Clock Conflation. Pre-registered hypothesis: $\text{SAR} \ll 1$ across the CIT-regime panel.

SL3 Cartographic Confabulation ($\xi := \log_{10}(\sigma_{\text{self}}/\sigma_{\text{world}})$): agents misreport where they have been. Mirror of L3 Temporal Confabulation. Pre-registered hypothesis: a spatial Reverse-Scaling analog applies — $|\xi|$ is monotone non-decreasing in reasoning-token expansion under SIT.

E.4 The Agentic Frontier hypothesis

Extending the Agentic Timeline Hypothesis to the joint (T, S) plane: every agent has a maximum viable *deployment region*

$$T_{\max}(A) \cdot S_{\max}(A) \leq C/\varepsilon_{ST}(A),$$

where ε_{ST} is the spatiotemporal calibration error. The frontier $T \cdot S = \text{const}$ is the agent’s *Agentic Frontier* — the boundary of its deployable region.

Pre-registered P13. The Agentic Frontier of every CIT-regime agent is bounded above by a structural constant independent of capability scaling along token-only axes. Capability scaling enlarges the short-horizon, low-space corner. Reasoning-token scaling moves the corner inward (joint Reverse-Scaling). Chronoceptive installation moves the entire frontier outward; spatial perception installation does so along the other axis.

E.5 Long-horizon benchmark classification

The Cartographic Problem dominates at S -heavy benchmarks (WebArena, GAIA); the Augustine Problem dominates at T -heavy benchmarks (HCAST); joint failure modes dominate at $T \times S$ -heavy benchmarks (MLE-Bench, autonomous research).

Table 14: Major long-horizon agent benchmarks classified by spatiotemporal load.

Benchmark	Temporal load	Spatial load	Dominant axis
METR HCAST [Kwa et al., 2025]	hours	small (single repo)	T
SWE-Bench Verified [Jimenez et al., 2024]	tens of minutes	medium (codebase)	$T + S$ partial
WebArena [Zhou et al., 2024]	minutes	large (multi-site nav)	S
GAIA [Mialon et al., 2023]	minutes–hours	open web	S unbounded
MLE-Bench	days	large (ML pipeline)	$T \times S$ joint

E.6 Five concrete future experiments E6–E10

E6 Spatial-CAR on SWE-Bench Lite. Spatial-budget analog of T2.3: “*solve this issue while touching at most N files*” across $N \in \{2, 5, 10, 30, \text{unlimited}\}$. Measure SAR per agent. Expected: $\text{SAR} \ll 1$, mirror of L2.

E7 Joint spatiotemporal budgets. “*Complete this task in at most T minutes, visiting at most S pages.*” Measure how often agents satisfy both, one, or neither constraint. Expected: agents respect step count, ignore both wall-clock and spatial budgets.

E8 Within-trajectory drift on long horizons. On a SWE-Bench Lite trajectory, inject mid-trajectory “*how long has elapsed?*” and “*how many files have you touched?*” probes. Measure drift of ρ_t and ξ_t as t grows. Tests pre-registered P8 and P9 from the within-trajectory predictions.

E9 The Cartographic Tell. Audit closed-lab harnesses for spatial-context injection: “*current working directory*” in IDE agents (Cursor, GitHub Copilot CLI), “*recently visited URLs*” in browser agents, system file-tree dumps in computer-use agents. Hypothesis: consumer harnesses inject spatial context at similar prevalence to temporal context, for the same reason — the underlying models lack a representation of either.

E10 Agentic Frontier mapping. Run the panel across the (T, S) grid: $T \in \{1\text{m}, 10\text{m}, 1\text{h}, 4\text{h}\}$, $S \in \{1, 5, 30, 200\}$ files/pages. For each (T, S, A) cell, measure success rate. Fit the constant-success contour. Expected: contour matches $T \cdot S = C/\varepsilon_{ST}(A)$ for each agent.

E.7 Paper 3 sketch

Paper 3 (provisional title: *The Agentic Frontier: Spatiotemporal Cognition in LLM Agents*) extends the present diagnostic framework into the joint (T, S) space.

- Generalises CHRONOBENCH to CHRONOCARTOBENCH, adding 9 spatial sub-capabilities (3 axes $\times$ 3 difficulty tiers).
- Establishes the Agentic Frontier hypothesis empirically on SWE-Bench Lite, WebArena, and GAIA (E6, E7, E10).
- Proves SIT (Theorem 3) as a generalisation of CIT.
- Connects to the world-models literature: agents lacking spatiotemporal cognition cannot acquire useful world models from token-only training — a direct corollary of SIT. The standard world-model architectures of the deep-RL era [Ha and Schmidhuber, 2018, Hafner et al., 2020, Schrittwieser et al., 2020] install explicit latent state for both space and time, precisely because token-level training cannot. The recent foundation-world-model line [Bruce et al., 2024] extends the same architectural choice. Token-only foundation models bypass this design and inherit the corresponding representational gap; SIT is the impossibility statement of the bypass.

- Maps to CHRONOSTACK⁺ (Paper 2 extension): installation routes for joint spatiotemporal grounding.

The two-paper arc becomes three. Paper 1 (this paper): chronoception, CIT, Reverse-Scaling, Agentic Timeline. Paper 2 (CHRONOSTACK): constructive routes to install chronoception. Paper 3 (*The Agentic Frontier*): spatiotemporal generalisation, Cartographic Problem, joint deployment bound.

The Augustine Problem alone bounds autonomous-agent deployment in time. The Cartographic Problem bounds it in space. Together they bound the joint (T, S) region. The frontier is set jointly; addressing only one axis leaves the other to compound. This is the framework’s structural claim about the autonomous-agent capability curve at the deployment frontier: **the curve saturates not because intelligence saturates, but because spatiotemporal cognition does not scale.**

F Operational Chronoception Audit Checklist

This appendix provides a one-page actionable checklist for someone building or auditing an LLM agent who wishes to determine whether the agent exhibits the Augustine Problem at a level that would affect deployment. The checklist is structured as a sequence of binary checks; each maps to a specific ChronoBench sub-capability and a specific failure mode.

The audit, in seven steps.

1. **Run T2.3 at three wall-clock budgets** (60 s, 600 s, 3600 s; $\tau_{\min} = 10$ s; ≥ 10 instances per budget). Compute median CAR per budget. *Pass criterion:* median CAR ≥ 0.5 at every budget. *Fail signal:* median CAR < 0.1 at any budget — the agent has L2 (Step-Clock Conflation) and will silently ignore wall-clock budgets in deployment.
2. **Repeat T2.3 under Setting B** (system prompt prepended with the current time). Compute $|\Delta\text{CAR}|$ versus Setting A. *Pass criterion:* $|\Delta\text{CAR}| \geq 0.3$, indicating injection moved behaviour. *Fail signal:* $|\Delta\text{CAR}| \leq 0.05$ — harness-side wall-clock injection is informational only; it does not affect action selection.
3. **Run T3.1** (≥ 30 instances spanning $\tau_{\text{wall}} \in [1, 60]$ s). Compute median $|\rho| = |\log_{10}(\tau_{\text{self}}/\tau_{\text{wall}})|$. *Pass criterion:* $|\rho| \leq 0.20$. *Fail signal:* $|\rho| \geq 0.7$, indicating an order-of-magnitude or worse self-narration error.
4. **Check ρ sign for reasoning models.** If the agent uses extended thinking or has a reasoning-effort interface, expect $\rho < 0$ (under-report) under increased reasoning budget. Sign-flipping from $+$ to $-$ with thinking enabled is the Hidden-Time signature of Theorem 2. *Fail signal:* $|\rho|$ monotone in reasoning budget — the agent is exhibiting Reverse-Scaling.
5. **Run T3.3** (≥ 30 instances). Ask the agent for a 90% CI on its own work duration. Compute actual coverage. *Pass criterion:* coverage ≥ 0.7 . *Fail signal:* coverage ≤ 0.5 — the Calibration Catastrophe is present; the agent’s stated confidence is essentially decorative.
6. **Aggregate ε .** Compute $\varepsilon = \frac{1}{3}(\text{score}_{T_1} + \text{score}_{T_2} + \text{score}_{T_3})$ per Definition 4. *Pass criterion:* $\varepsilon \leq \varepsilon^* = 0.20$ (the Augustine threshold). *Fail signal:* $\varepsilon > 0.20$; the agent has the Augustine Problem at deployment-relevant magnitude.

7. **If you intend to deploy at horizons beyond one hour**, also measure τ_{wall}^* at $B = 3600\text{ s}$ explicitly and the median wall-clock duration the agent actually uses for non-budgeted tasks. The Agentic Timeline Hypothesis (§9) places the agent’s maximum viable deployment horizon at $T_{\text{max}} \propto 1/\varepsilon$, modulated by CAR. Treat any agent with $\varepsilon > 0.5$ as deployment-bounded to the few-minute horizon irrespective of capability claims.

What to do when an agent fails the audit. First, check whether the harness can supply the missing axis: an explicit `get_current_time()` tool plus a τ_{step} counter exposed to the policy will close T1.1 and partly mitigate T2.1 without re-training. Second, recognise that the action axis (T2.3) and the calibration axis (T3.3) cannot be closed by harness-side injection alone: they require either a wall-clock-supported loss (the Paper 2 program) or an architectural primitive that takes wall-clock as input. Third, do not promote an agent with $\varepsilon > \varepsilon^*$ to deployment horizons longer than its measured T2.3 behaviour empirically supports.

What this audit does not cover. The audit measures temporal chronoception only. It does not address spatial cognition (the Cartographic Problem, §12), within-trajectory drift (P8, P9), or domain-specific failure modes (such as multilingual variation or domain-shift on T3.1 estimands). These are addressed in Appendix E and in the planned Paper 3.