The ER model contains the main entity sets User, Actor, Title, GameSession, and Guess.
A user can play many game sessions, and each game session belongs to one user.
Each game session contains guesses, and each guess refers to one actor.
A game session also has one correct answer actor. Actors and titles have a many-to-many relationship because one actor can appear in many titles, and one title can contain many actors.
Users can also follow other users, which is represented as a recursive relationship on User.

UserActorGame(
user_id, username, email, password_hash,
session_id, played_date, answer_actor_id,
guess_id, guess_number, guessed_actor_id,
actor_first_name, actor_last_name, birth_year, death_year, primary_profession,
title_id, primary_title, title_type, start_year, genres,
followee_id
)

user_id → username, email, password_hash
actor_id → first_name, last_name, birth_year, death_year, primary_profession
title_id → primary_title, title_type, start_year, genres
session_id → user_id, answer_actor_id, played_date
guess_id → session_id, guessed_actor_id, guess_number
(user_id, followee_id) → follow relationship
(actor_id, title_id) → actor-title relationship

The normalized schema is very similar to the ER-derived schema. The main difference is that many-to-many relationships, such as Actor appearing in Title and User following User, become separate relationship tables. We chose the normalized schema because it reduces redundancy, avoids update anomalies, and matches the relational database structure needed for MySQL.

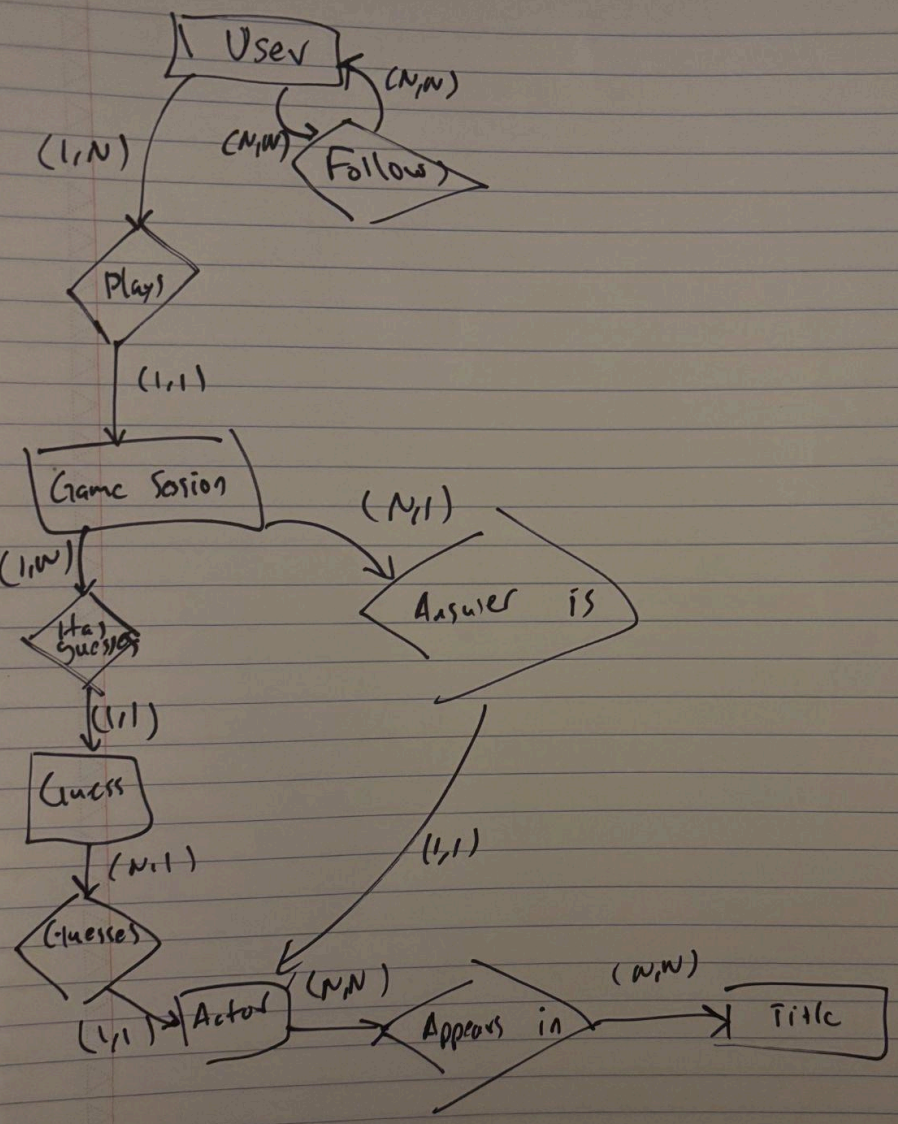
User
(N,N)
(N,N)
Follow
(1,N)
Plays
(1,1)
Game Sesion
(N,1)
Answer is
(1,N)
Has Sucsess
(1,1)
Guess
(N,1)
Guesses
(1,1)
Actor
(N,N)
Appears in
(N,N)
Title