


In my code one fork() process happens at a time where a function, say resized is called, the program will fork the child and run the exec() function. Once done the abort() function returns to the parent, killing the child. After this the next function call happens and this process repeats.

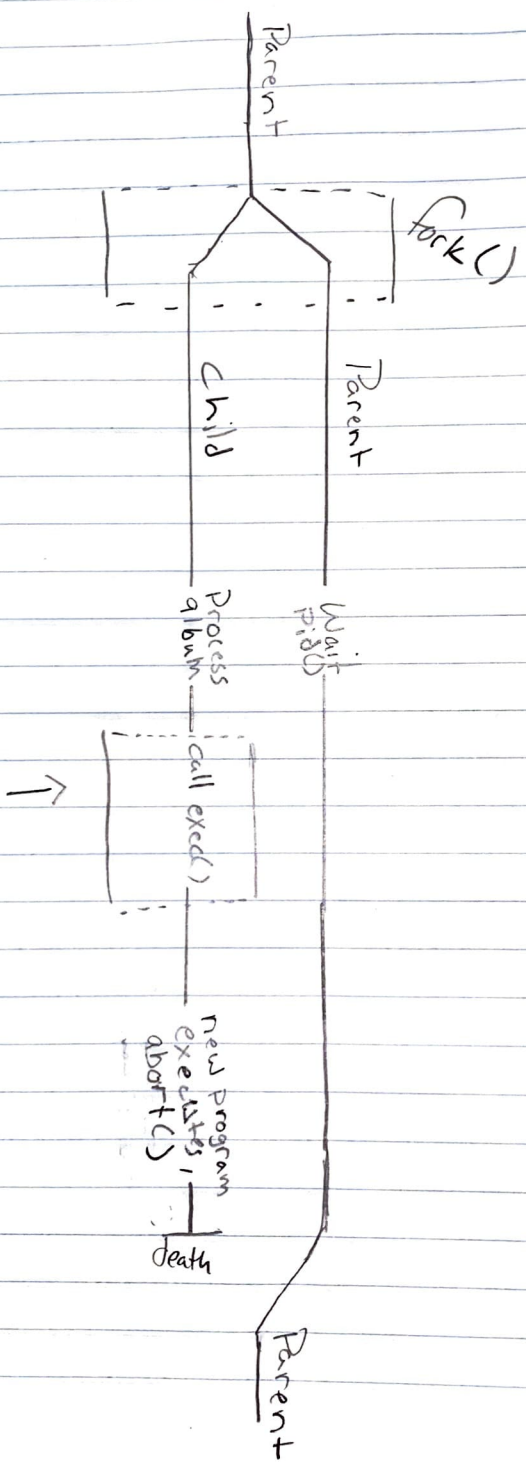

where (convert, display, and arguments are called and processed)