

Informatics 1A

Functional Programming Lectures 12–13

Data Types and Data Abstraction

Don Sannella

University of Edinburgh

Part I

2022 Inf1A FP Competition

2022 Inf1A FP Competition

- Prizes: Book tokens. And glory!
- Number of prizes depend on number and quality of entries.
- Write a Haskell program with interesting graphics. Be creative!
- Previous years's entries are online:

`https://homepages.inf.ed.ac.uk/wadler/fp-competition-2019/`

`https://ue-infla-2020.github.io/FP-competition-2020/`

- Sponsored by Galois (`galois.com`)
- Submit code and image(s), list everyone who contributed.
- E-mail submissions

`To: Younwoo Jeong <younwoo11650@gmail.com>`

`Subject: 2022 Inf1A FP Competition`

- Submit by: **4pm Monday 21 November**
- Prizes awarded: **9am Tuesday 29 November**

Part II

Efficiency and O-notation



Premature optimization is the root
of all evil.

— *Donald Knuth* —

AZ QUOTES



Premature optimization is the root
of all evil in programming.

— *Tony Hoare* —

AZ QUOTES

Left vs. Right

Let $xss = [xs_1, \dots, xs_m]$ consist of m lists each of length n .

Associated to the left, `foldl (++) [] xss`.

$$((([] ++ xs_1) ++ xs_2) ++ xs_3) \cdots ++ xs_m$$

Number of steps

$$\underbrace{0 + n + 2n + 3n + \dots + (m-1)n}_{m \text{ times}} = O(m^2 n)$$

Associated to the right, `foldr (++) [] xss`.


$$xs_1 ++ \cdots (xs_{m-2} ++ (xs_{m-1} ++ (xs_m ++ [])))$$

Number of steps


$$\underbrace{n + n + n + \cdots + n}_{m \text{ times}} = O(mn)$$

steps. When $m = 1000$, the first is a thousand times slower than the second!

$t = n$ vs $t = n^2$

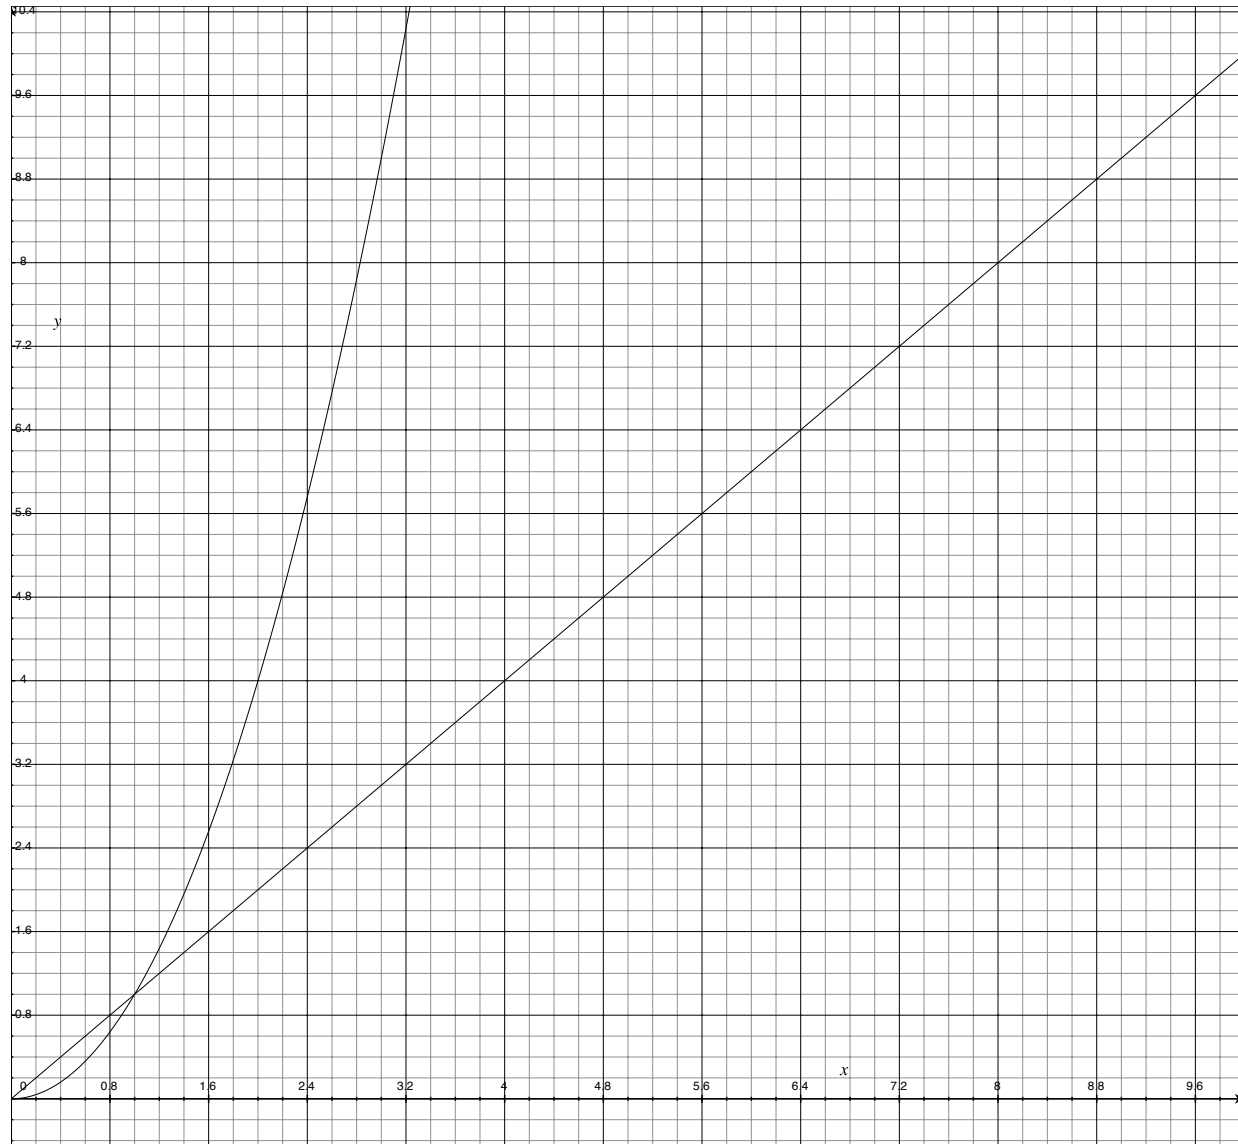

$$t = 2n \text{ vs } t = 0.5n^2$$

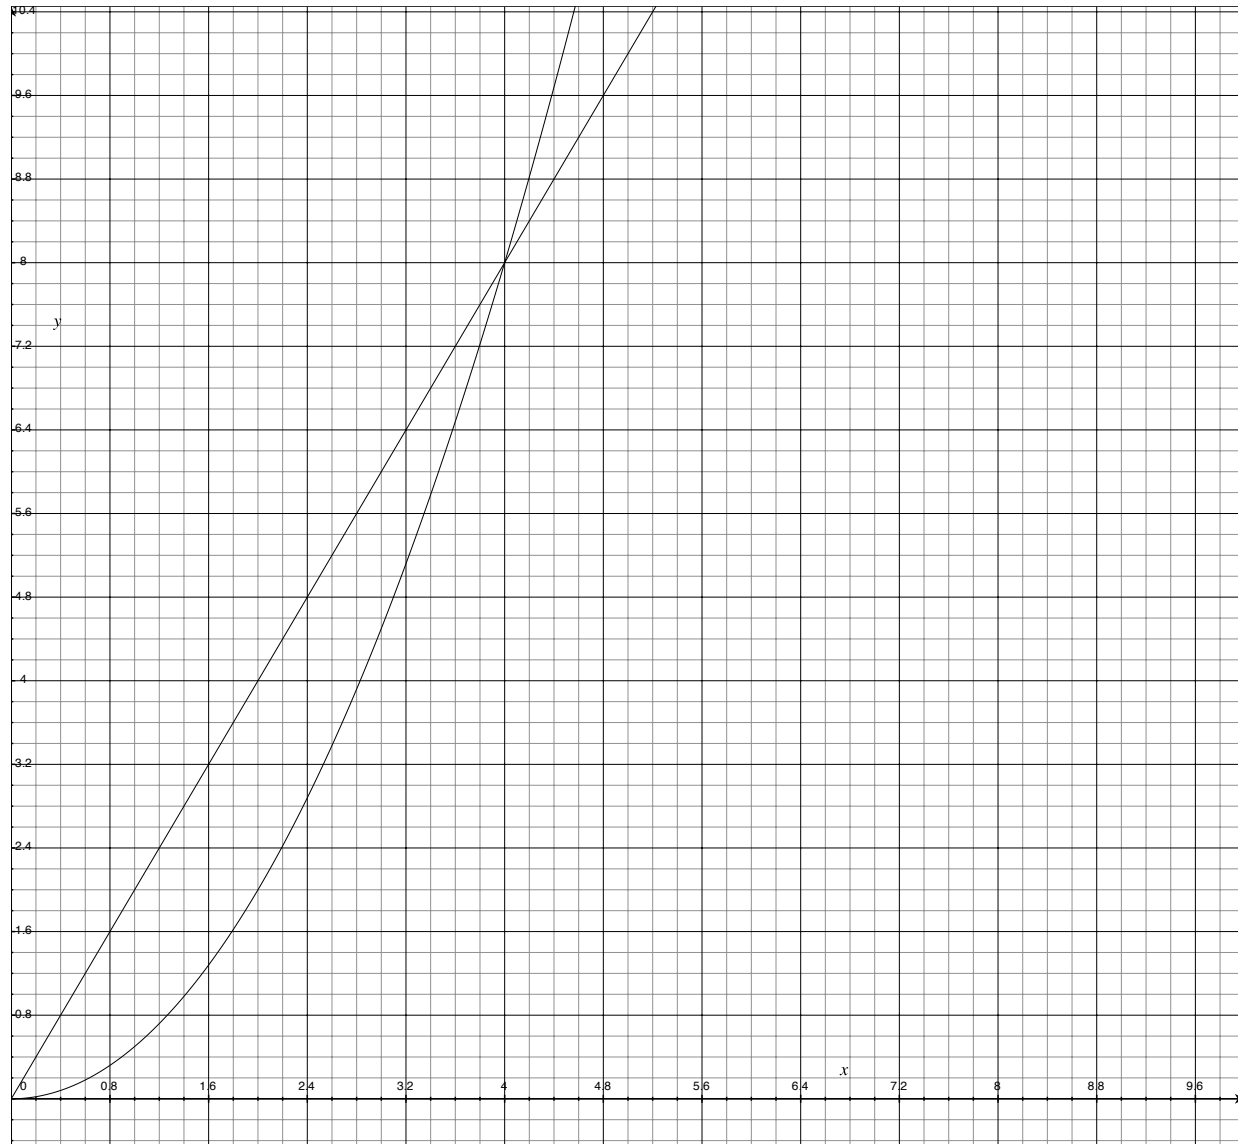

Big-O notation

Definition We say f is $O(g)$ when g is an upper bound for f , for big enough inputs. To be precise, f is $O(g)$ if there are constants c and m such that $f(n) \leq cg(n)$ for all $n \geq m$.

For instance: $2n + 10$ is $O(n)$ because $2n + 10 \leq 4n$ for all $n \geq 5$.

Big-O notation

Definition We say f is $O(g)$ when g is an upper bound for f , for big enough inputs. To be precise, f is $O(g)$ if there are constants c and m such that $f(n) \leq cg(n)$ for all $n \geq m$.

For instance: $2n + 10$ is $O(n)$ because $2n + 10 \leq 4n$ for all $n \geq 5$.

Constant factors don't matter


$$O(n) = O(an + b), \text{ for any } a \text{ and } b$$

$$O(n^2) = O(an^2 + bn + c), \text{ for any } a, b, \text{ and } c$$


$$O(n^3) = O(an^3 + bn^2 + cn + d), \text{ for any } a, b, c, \text{ and } d$$

$$O(\log_2(n)) = O(\log_{10}(n))$$

$O(n), O(n^2), O(n^3), O(n^4)$

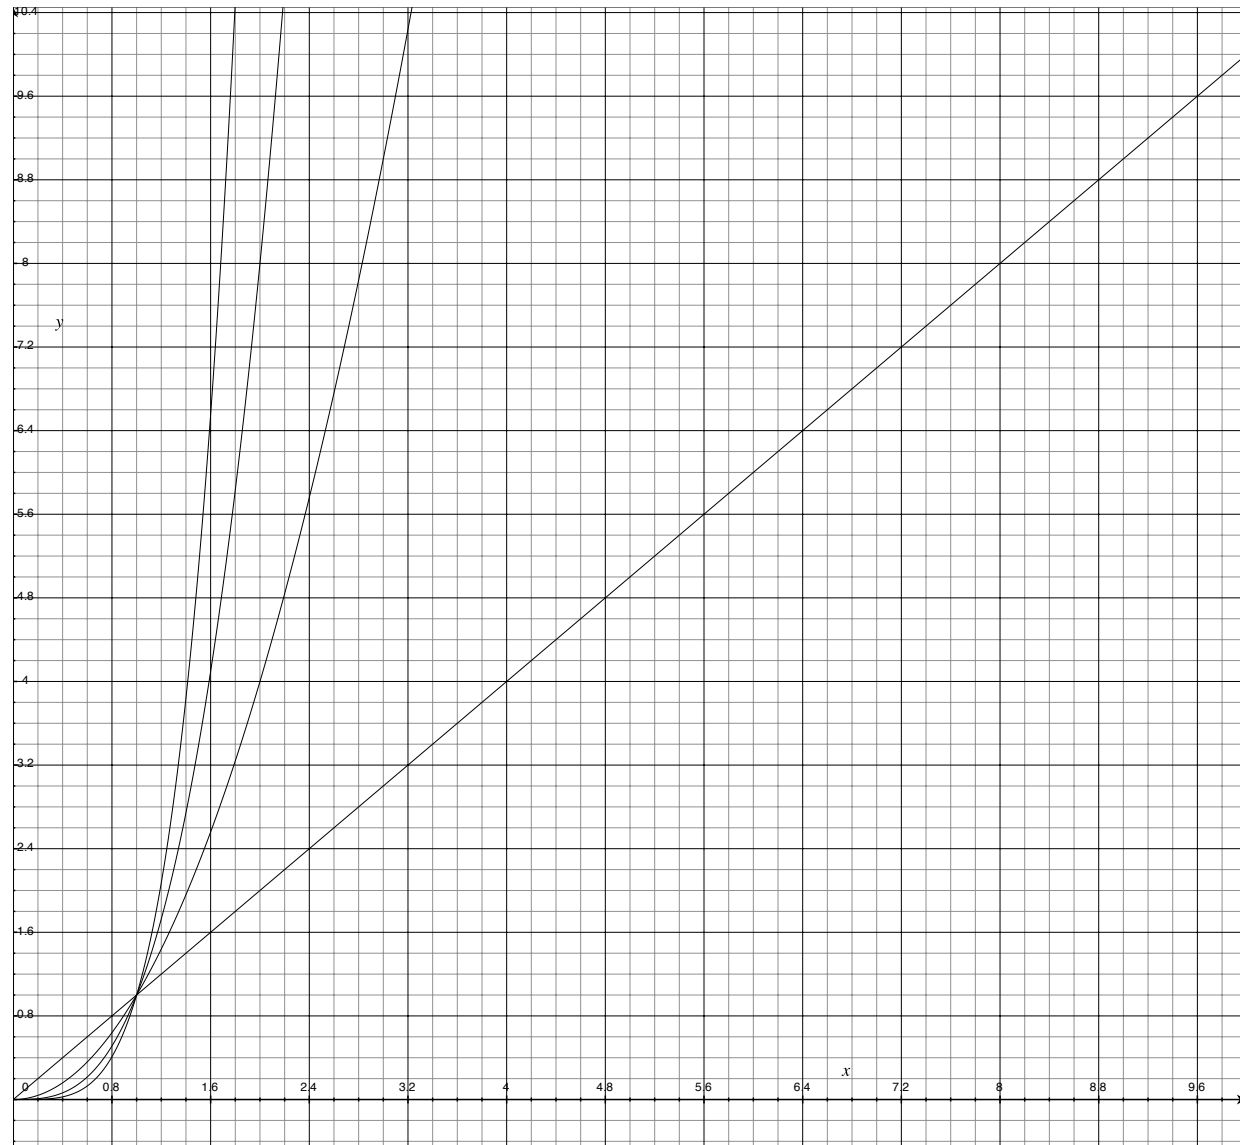

$O(\log n)$, $O(n)$, $O(n \log n)$, $O(2^n)$

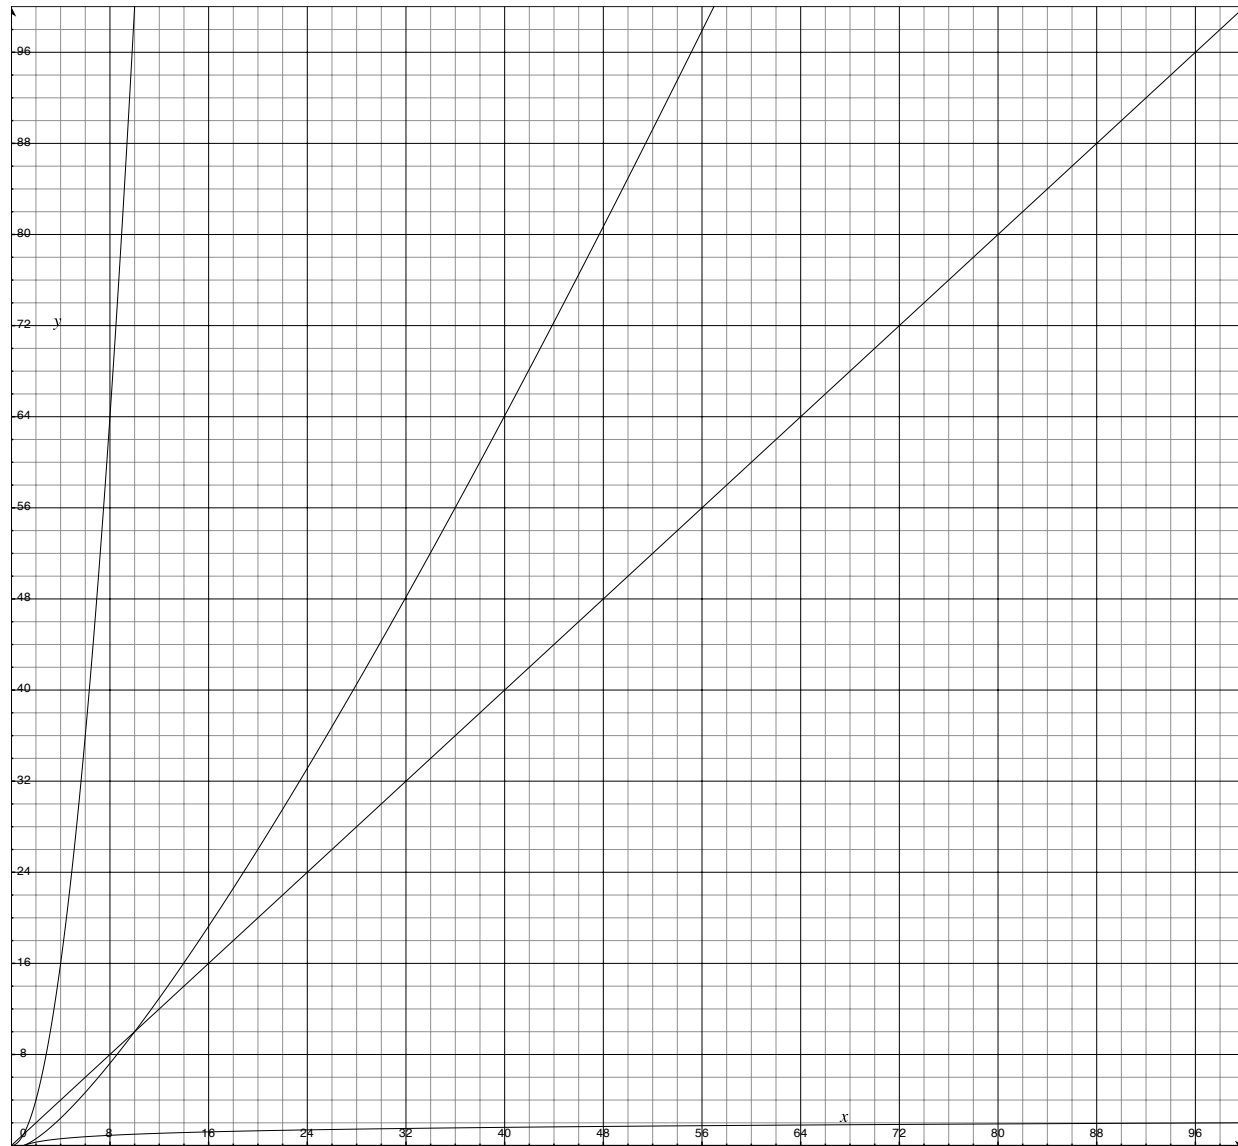

$O(\log n)$, $O(n \log n)$, $O(2^n)$

$O(\log n)$ “logarithmic”: divide and conquer search algorithms

$O(n)$ “linear”: normal list search algorithms

$O(n \log n)$: sorting algorithms

$O(2^n)$ “exponential”: tautology checking

Part III

Sets as lists

List.hs (1)

```
module List
  (Set, empty, insert, set, element, equal) where
import Test.QuickCheck

type Set a = [a]

empty :: Set a
empty = []

insert :: a -> Set a -> Set a
insert x xs = x:xs

set :: [a] -> Set a
set xs = xs
```


List.hs (2)

```
element :: Eq a => a -> Set a -> Bool
x `element` xs = x `elem` xs
```

```
equal :: Eq a => Set a -> Set a -> Bool
xs `equal` ys = xs `subset` ys && ys `subset` xs
  where
    xs `subset` ys = and [ x `elem` ys | x <- xs ]
```

List.hs (3)

```
prop_element :: [Int] -> Bool
prop_element ys =
  and [ x `element` s == odd x | x <- ys ]
  where
    s = set [ x | x <- ys, odd x ]

check =
  quickCheck prop_element

-- Prelude List> check
-- +++ OK, passed 100 tests.
```

Part IV

Sets as *ordered* lists

OrderedList.hs (1)

```
module OrderedList
  (Set, empty, insert, set, element, equal) where

import Data.List (nub, sort)
import Test.QuickCheck

type Set a = [a]

invariant :: Ord a => Set a -> Bool
invariant xs =
  and [ x < y | (x,y) <- zip xs (tail xs) ]
```

OrderedList.hs (2)

```
empty :: Set a
empty = []
```

```
insert :: Ord a => a -> Set a -> Set a
insert x [] = [x]
insert x (y:ys) | x < y = x : y : ys
                | x == y = y : ys
                | x > y = y : insert x ys
```

```
set :: Ord a => [a] -> Set a
set xs = nub (sort xs)
```

OrderedList.hs (3)

```
element :: Ord a => a -> Set a -> Bool
x `element` [] = False
x `element` (y:ys) | x < y = False
                   | x == y = True
                   | x > y = x `element` ys
```

```
equal :: Eq a => Set a -> Set a -> Bool
xs `equal` ys = xs == ys
```

OrderedList.hs (4)

```
prop_invariant :: [Int] -> Bool
prop_invariant xs = invariant s
  where
    s = set xs
```

```
prop_element :: [Int] -> Bool
prop_element ys =
  and [ x `element` s == odd x | x <- ys ]
  where
    s = set [ x | x <- ys, odd x ]
```

```
check =
  quickCheck prop_invariant >>
  quickCheck prop_element
```

```
Prelude OrderedList> check
+++ OK, passed 100 tests.
+++ OK, passed 100 tests.
```

Part V

Sets as ordered trees

Tree.hs (1)

```
module Tree
  (Set (Nil,Node), empty, insert, set, element, equal) where
import Test.QuickCheck

data Set a = Nil | Node (Set a) a (Set a)

list :: Set a -> [a]
list Nil = []
list (Node l x r) = list l ++ [x] ++ list r

invariant :: Ord a => Set a -> Bool
invariant Nil = True
invariant (Node l x r) =
  invariant l && invariant r &&
  and [ y < x | y <- list l ] &&
  and [ y > x | y <- list r ]
```

Tree.hs (2)

```
empty :: Set a
empty  = Nil
```

```
insert :: Ord a => a -> Set a -> Set a
insert x Nil    = Node Nil x Nil
insert x (Node l y r)
  | x == y      = Node l y r
  | x < y       = Node (insert x l) y r
  | x > y       = Node l y (insert x r)
```

```
set :: Ord a => [a] -> Set a
set  = foldr insert empty
```

Tree.hs (3)

```
element :: Ord a => a -> Set a -> Bool
x `element` Nil    = False
x `element` (Node l y r)
  | x == y          = True
  | x < y            = x `element` l
  | x > y            = x `element` r
```

```
equal :: Ord a => Set a -> Set a -> Bool
s `equal` t        = list s == list t
```

Tree.hs (4)

```
prop_invariant :: [Int] -> Bool
prop_invariant xs = invariant s
  where
    s = set xs
```

```
prop_element :: [Int] -> Bool
prop_element ys =
  and [ x `element` s == odd x | x <- ys ]
  where
    s = set [ x | x <- ys, odd x ]
```

```
check =
  quickCheck prop_invariant >>
  quickCheck prop_element
```

```
-- Prelude Tree> check
-- +++ OK, passed 100 tests.
-- +++ OK, passed 100 tests.
```

Part VI

Sets as *balanced* trees

BalancedTree.hs (1)

```
module BalancedTree
  (Set (Nil,Node), empty, insert, set, element, equal) where
import Test.QuickCheck

type Depth = Int
data Set a = Nil | Node (Set a) a (Set a) Depth

node :: Set a -> a -> Set a -> Set a
node l x r = Node l x r (1 + (depth l `max` depth r))

depth :: Set a -> Int
depth Nil = 0
depth (Node _ _ _ d) = d
```

BalancedTree.hs (2)

```
list :: Set a -> [a]
list Nil = []
list (Node l x r _) = list l ++ [x] ++ list r

invariant :: Ord a => Set a -> Bool
invariant Nil = True
invariant (Node l x r d) =
    invariant l && invariant r &&
    and [ y < x | y <- list l ] &&
    and [ y > x | y <- list r ] &&
    abs (depth l - depth r) <= 1 &&
    d == 1 + (depth l `max` depth r)
```



BalancedTree.hs (3)

```
empty :: Set a
empty  =  Nil
```



```
insert :: Ord a => a -> Set a -> Set a
insert x Nil    =  node empty x empty
insert x (Node l y r _)
    | x == y      =  node l y r
    | x < y       =  rebalance (node (insert x l) y r)
    | x > y       =  rebalance (node l y (insert x r))
```

```
set :: Ord a => [a] -> Set a
set  =  foldr insert empty
```


Rebalancing



Node (Node a x b) y c \rightarrow Node a x (Node b y c)

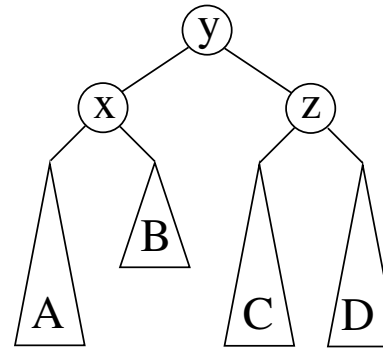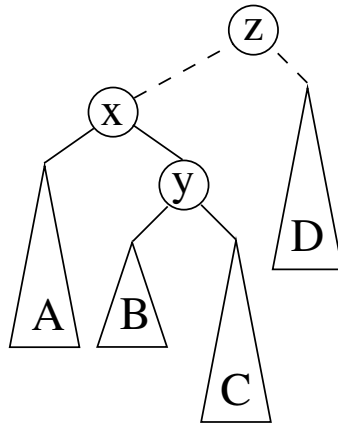

Node (Node a x (Node b y c) z d)
 \rightarrow Node (Node a x b) y (Node c z d)

BalancedTree.hs (4)

```
rebalance :: Set a -> Set a
rebalance (Node (Node a x b _) y c _)
  | depth a >= depth b && depth a > depth c
  = node a x (node b y c)
rebalance (Node a x (Node b y c _) _)
  | depth c >= depth b && depth c > depth a
  = node (node a x b) y c
rebalance (Node (Node a x (Node b y c _) _) z d _)
  | depth (node b y c) > depth d
  = node (node a x b) y (node c z d)
rebalance (Node a x (Node (Node b y c _) z d _) _)
  | depth (node b y c) > depth a
  = node (node a x b) y (node c z d)
rebalance a = a
```

BalancedTree.hs (5)

```
element :: Ord a => a -> Set a -> Bool
x `element` Nil    = False
x `element` (Node l y r _)
  | x == y        = True
  | x < y          = x `element` l
  | x > y          = x `element` r
```

```
equal :: Ord a => Set a -> Set a -> Bool
s `equal` t    = list s == list t
```

BalancedTree.hs (6)

```
prop_invariant :: [Int] -> Bool
prop_invariant xs = invariant s
  where
    s = set xs
```

```
prop_element :: [Int] -> Bool
prop_element ys =
  and [ x `element` s == odd x | x <- ys ]
  where
    s = set [ x | x <- ys, odd x ]
```

```
check =
  quickCheck prop_invariant >>
  quickCheck prop_element
```

```
-- Prelude BalancedTree> check
-- +++ OK, passed 100 tests.
-- +++ OK, passed 100 tests.
```

BalancedTreeTest.hs

```
module BalancedTreeTest where  
import BalancedTree
```

```
test :: Int -> Bool
```

```
test n =
```

```
    s `equal` t
```

```
    where
```

```
    s = set [1,2..n]
```

```
    t = set [n,n-1..1]
```

```
badtest :: Bool
```

```
badtest =
```

```
    s `equal` t
```

```
    where
```

```
    s = set [1,2,3]
```

```
    t = (Node Nil 1 (Node Nil 2 (Node Nil 3 Nil 1) 2) 3)
```

```
    -- breaks the invariant!
```

Part VII

Complexity, revisited

Summary

	insert	set	element	equal
List	$O(1)$	$O(1)$	$O(n)$	$O(n^2)$
OrderedList	$O(n)$	$O(n \log n)$	$O(n)$	$O(n)$
Tree	$O(\log n)^*$	$O(n \log n)^*$	$O(\log n)^*$	$O(n)$
	$O(n)^\dagger$	$O(n^2)^\dagger$	$O(n)^\dagger$	
BalancedTree	$O(\log n)$	$O(n \log n)$	$O(\log n)$	$O(n)$

* average case / \dagger worst case

Part VIII

Data Abstraction

ListAbs.hs (1)

```
module ListAbs
  (Set, empty, insert, set, element, equal) where
import Test.QuickCheck

data Set a = MkSet [a]

empty :: Set a
empty = MkSet []

insert :: a -> Set a -> Set a
insert x (MkSet xs) = MkSet (x:xs)

set :: [a] -> Set a
set xs = MkSet xs
```

ListAbs.hs (2)

```
element :: Eq a => a -> Set a -> Bool
x `element` (MkSet xs) = x `elem` xs
```

```
equal :: Eq a => Set a -> Set a -> Bool
MkSet xs `equal` MkSet ys =
```

```
  xs `subset` ys && ys `subset` xs
```

```
  where
```

```
  xs `subset` ys = and [ x `elem` ys | x <- xs ]
```

ListAbs.hs (3)

```
prop_element :: [Int] -> Bool
prop_element ys =
  and [ x `element` s == odd x | x <- ys ]
  where
    s = set [ x | x <- ys, odd x ]

check =
  quickCheck prop_element

-- Prelude ListAbs> check
-- +++ OK, passed 100 tests.
```

ListAbsTest.hs

```
module ListAbsTest where  
import ListAbs
```

```
test :: Int -> Bool
```

```
test n =
```

```
    s `equal` t
```

```
    where
```

```
    s = set [1,2..n]
```

```
    t = set [n,n-1..1]
```

```
-- Following no longer type checks!
```

```
-- breakAbstraction :: Set a -> a
```

```
-- breakAbstraction = head
```

Hiding—the secret of abstraction

```
module ListAbs (Set, empty, insert, set, element, equal)
```

```
> ghci ListAbs.hs
```

```
Ok, modules loaded: SetList, MainList.
```

```
> let s0 = set [2,7,1,8,2,8]
```

```
> let MkSet xs = s0 in xs
```

```
Not in scope: data constructor 'MkSet'
```

VS.

```
module ListUnhidden (Set (MkSet), empty, insert, element, equal)
```

```
> ghci ListUnhidden.hs
```

```
> let s0 = set [2,7,1,8,2,8]
```

```
> let MkSet xs = s0 in xs
```

```
[2,7,1,8,2,8]
```

```
> head xs
```

```
2
```

Hiding—the secret of abstraction

```
module TreeAbs (Set, empty, insert, set, element, equal)
```

```
> ghci TreeAbs.hs
```

```
Ok, modules loaded: SetList, MainList.
```

```
> let s0 = Node (Node Nil 3 Nil) 2 (Node Nil 1 Nil)
```

```
Not in scope: data constructor 'Node', 'Nil'
```

VS.

```
module TreeUnabs (Set (Node, Nil), empty, insert, element, equal)
```

```
> ghci TreeUnabs.hs
```

```
> let s0 = Node (Node Nil 3 Nil) 2 (Node Nil 1 Nil)
```

```
> invariant s0
```

```
False
```

Preserving the invariant

```
module TreeAbsInvariantTest where
import TreeAbs

prop_invariant_empty = invariant empty

prop_invariant_insert x s =
  invariant s ==> invariant (insert x s)

prop_invariant_set xs = invariant (set xs)

check =
  quickCheck prop_invariant_empty >>
  quickCheck prop_invariant_insert >>
  quickCheck prop_invariant_set

-- Prelude TreeAbsInvariantTest> check
-- +++ OK, passed 1 tests.
-- +++ OK, passed 100 tests.
-- +++ OK, passed 100 tests.
```

It's mine!



Страна Мам.ру