

Deep Learning Topics: Skip Connections, and the Keras Model API

Paul Rodriguez, PhD
(SDSC)


August 2022

Outline

- **Gate connection idea**
- **Skip and Residual connections**
- **Keras Model API**
- **Exercise MNIST Autoencoding**



Recall: the logistic unit

$$f(x) = \frac{1}{1 + \exp(-(b + wx))} \iff \begin{array}{c} b \\ \swarrow \\ x \xrightarrow{w} \bigcirc \rightarrow \text{output value} \end{array}$$

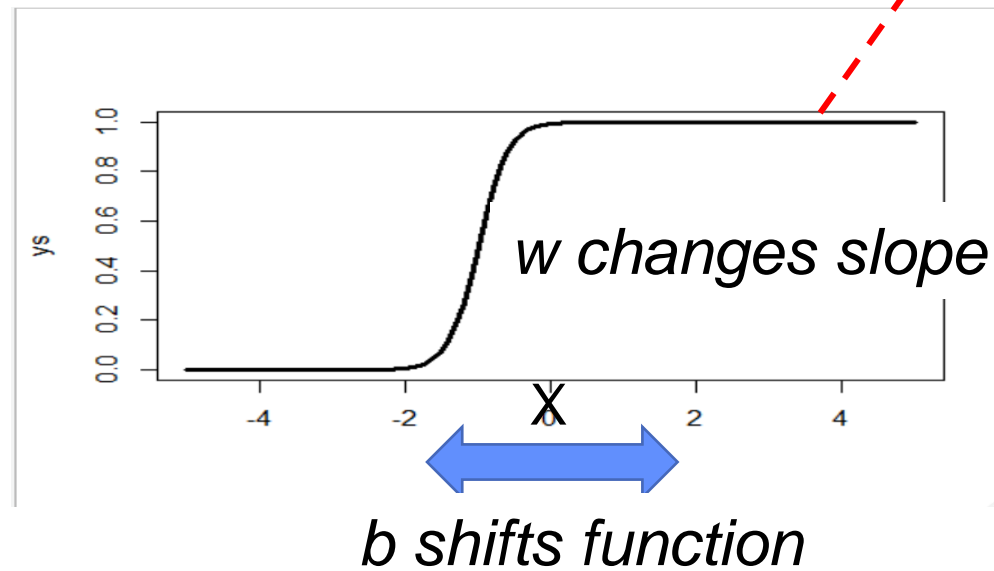


Example: 1 input into 2 logistic units with these activations

If you add these 2 units into a final output unit what would the output function look like?

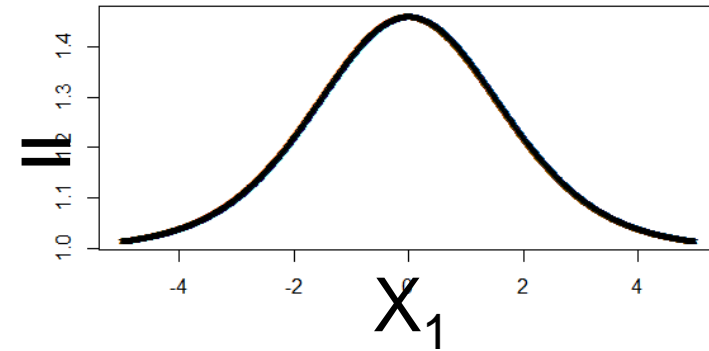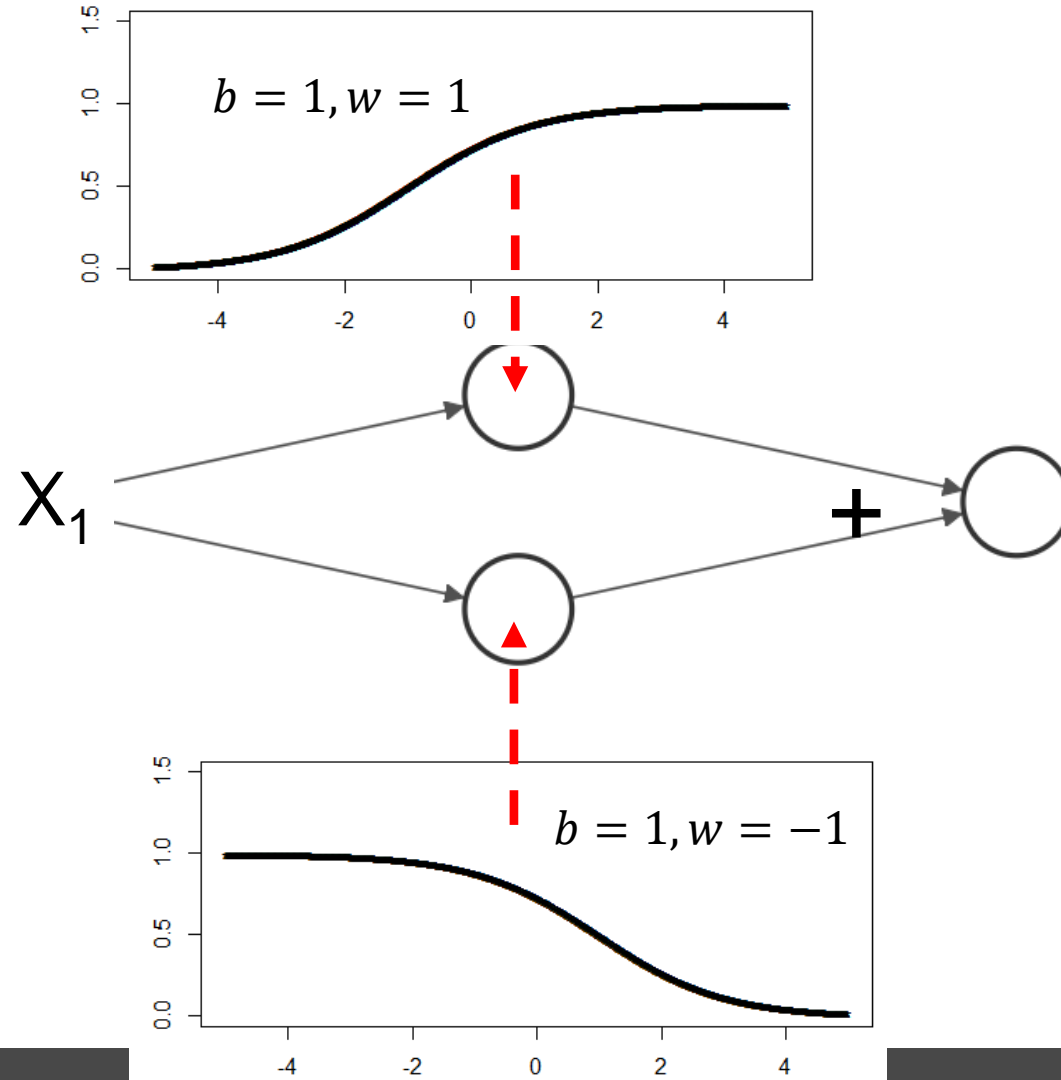


Example: 2 input into 2 logistic units with these activations

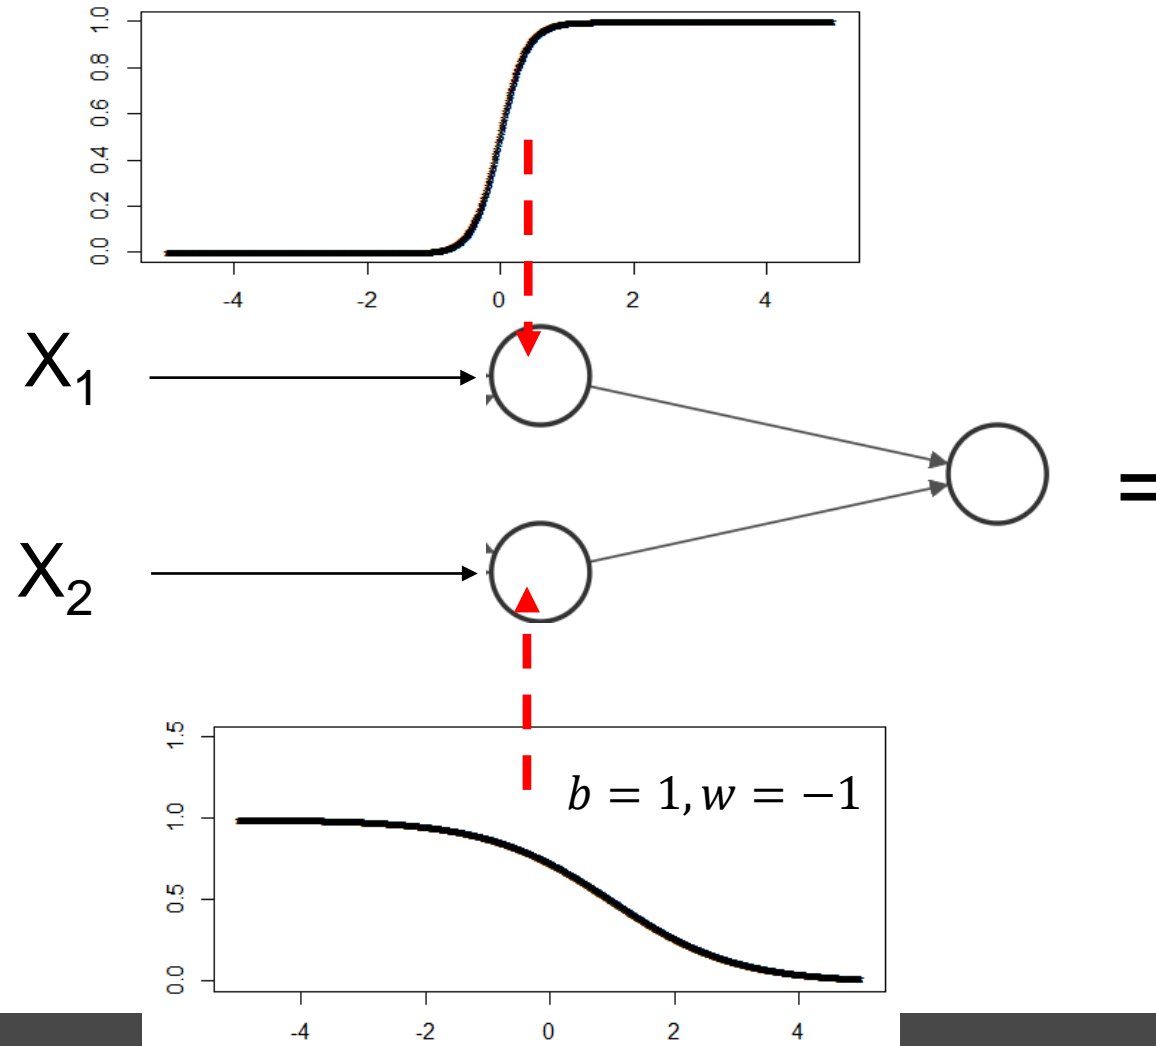




Example: 2 input into 2 logistic units with these activations

*What if you multiply these?
What is the output function doing?*

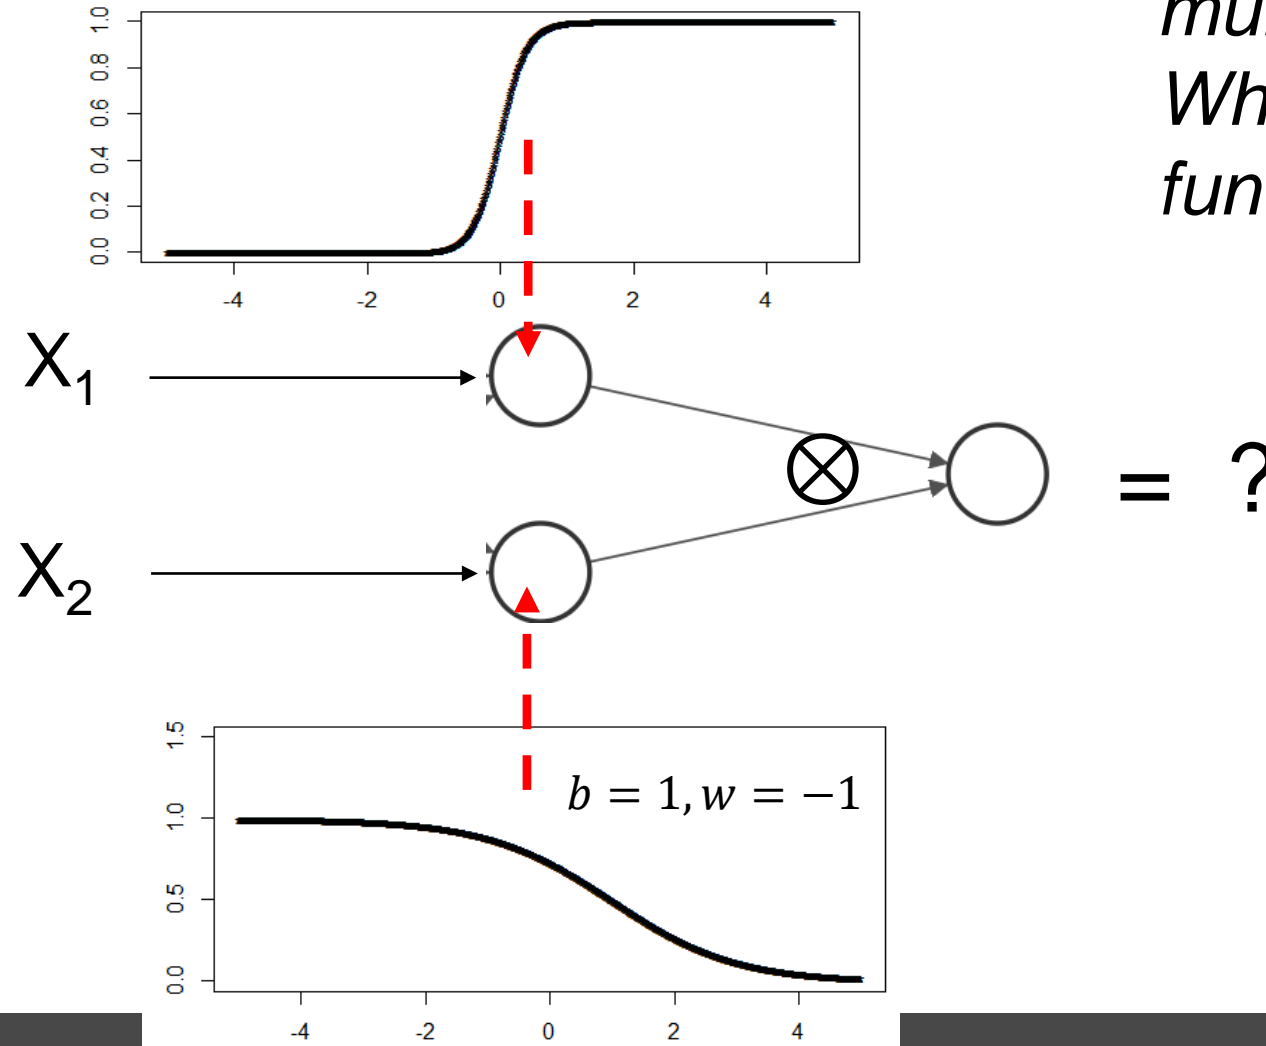


Example: 2 input into 2 logistic units with these activations

*What if you multiply these?
What is the output function doing?*

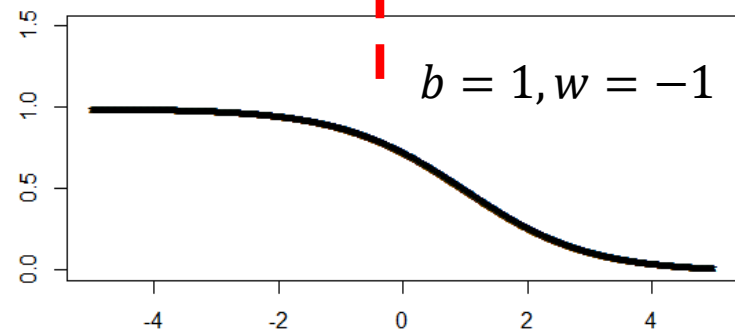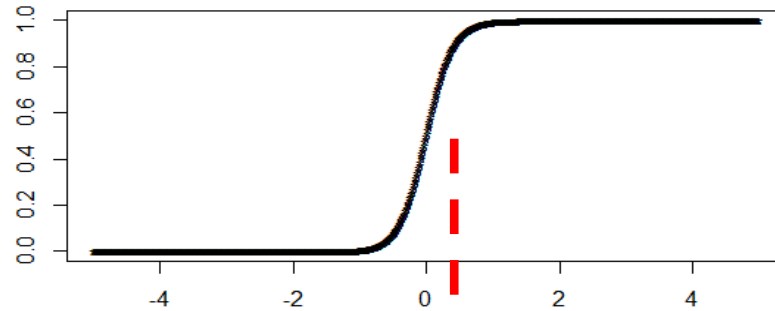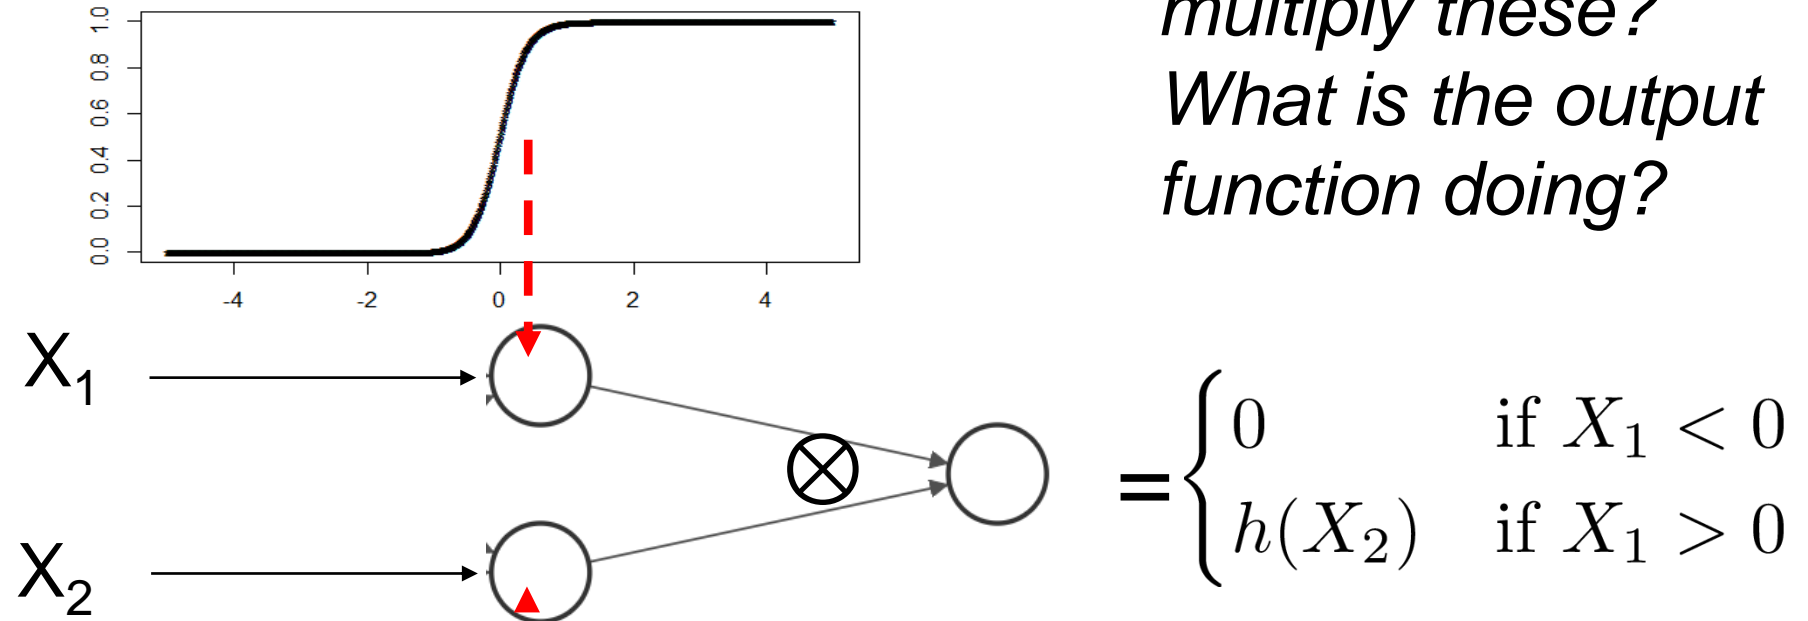


X_1 "gates" X_2 activation


A recurrent unit for sequence learning can be replaced by a gated unit

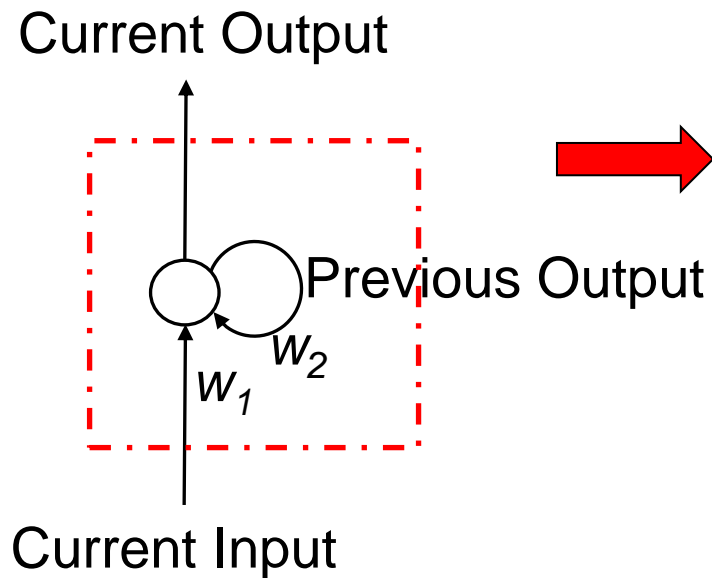

A recurrent unit for sequence learning can be replaced by a gated unit

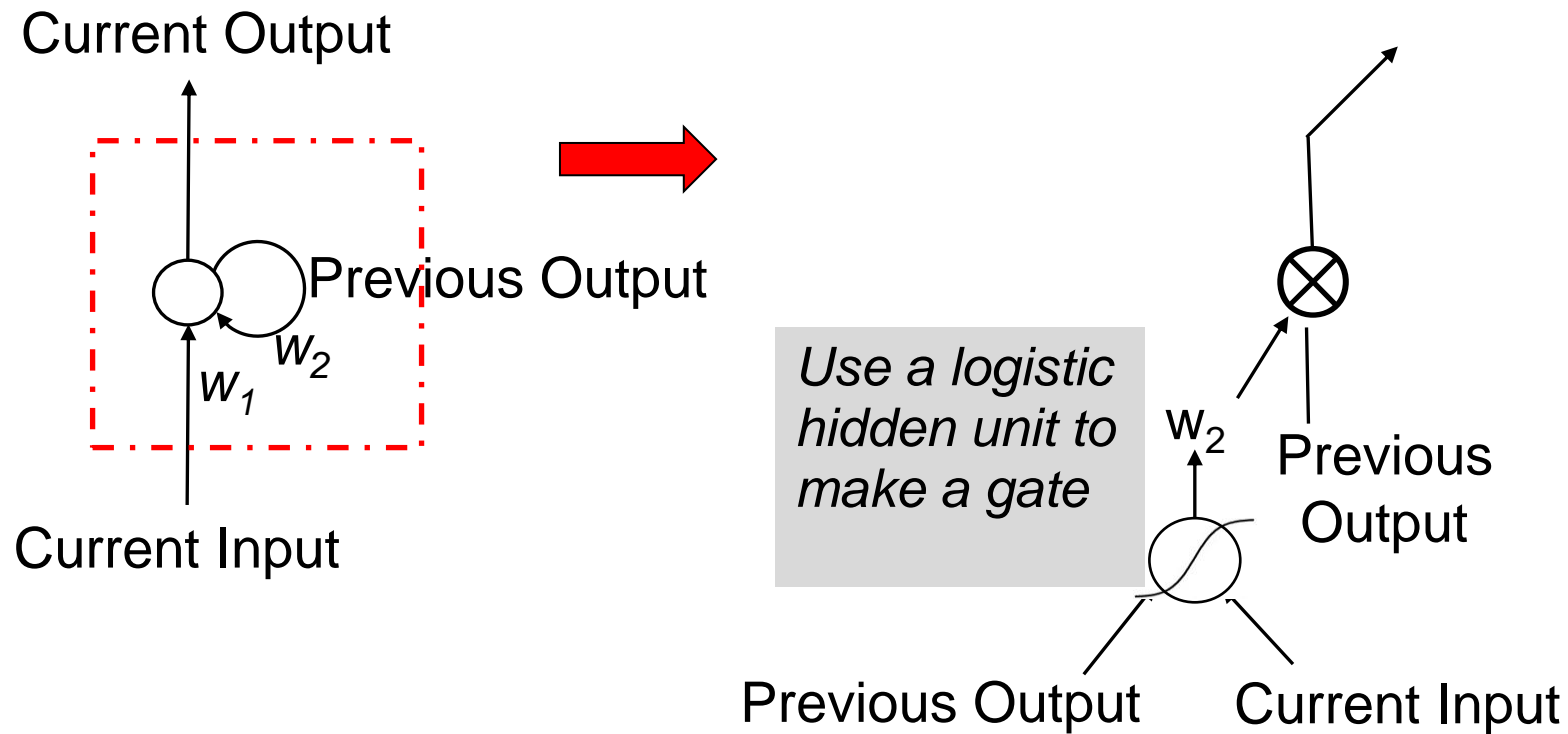

A recurrent unit for sequence learning can be replaced by a gated unit

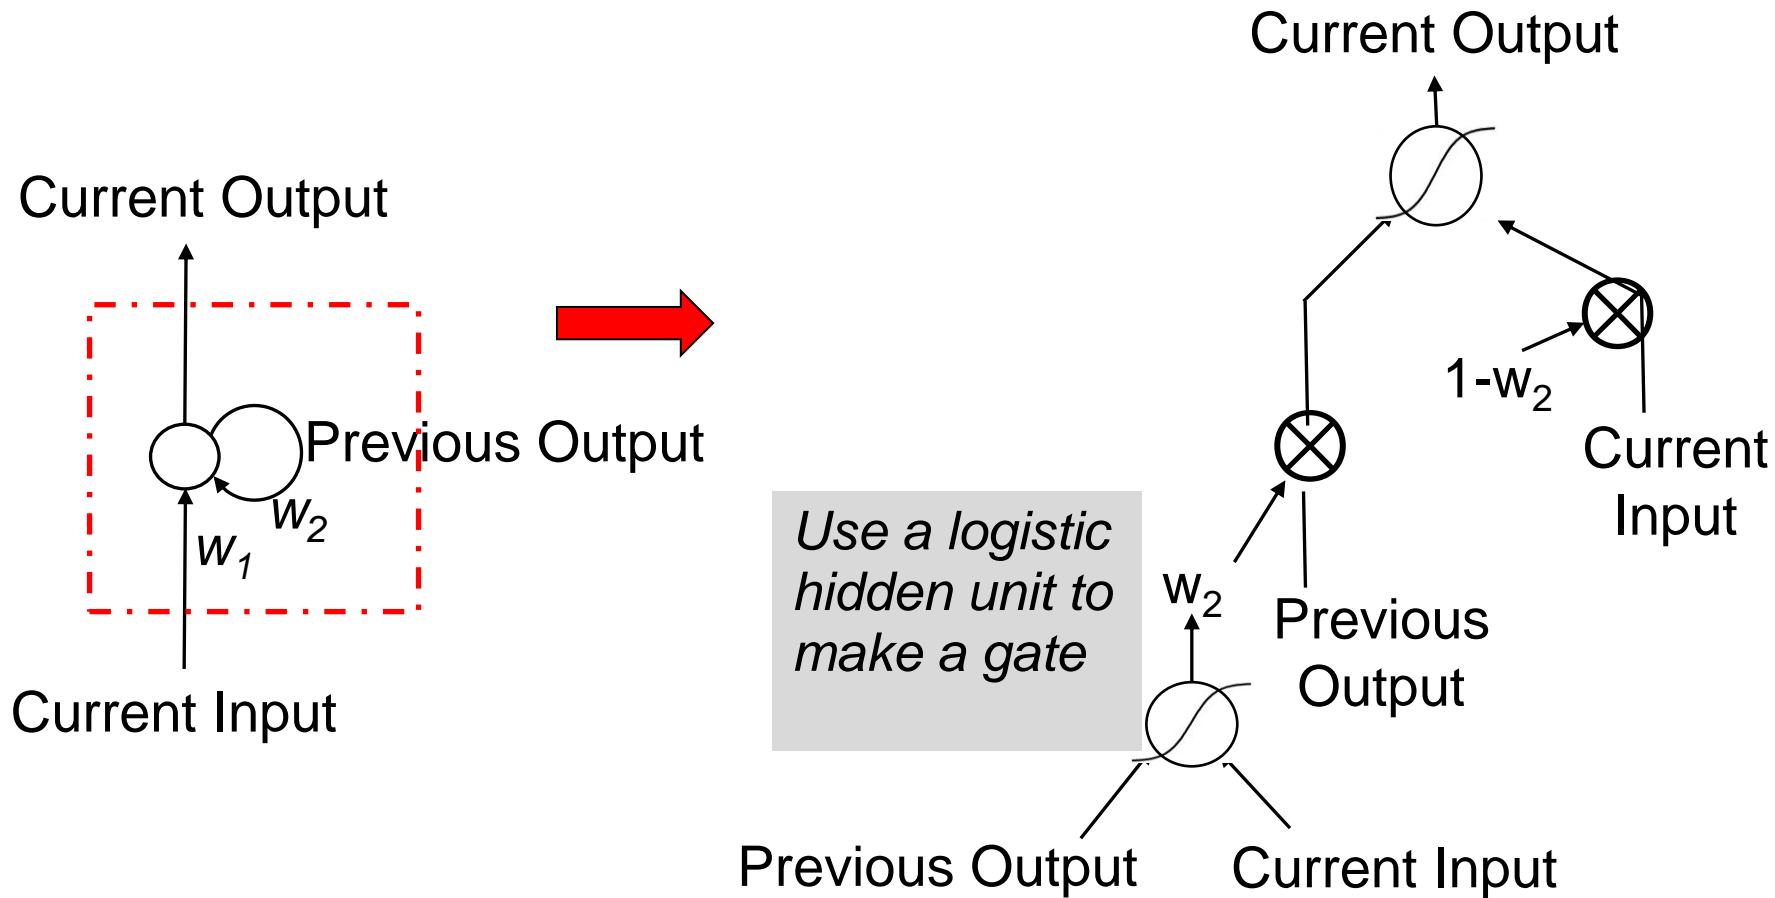


Use the gate to either keep previous output or update it with current input


*'Gated Recurrent Unit'
Cho, Bengio 2015*

Redrawing the gate for two sets of hidden units

Input layer Hidden layer

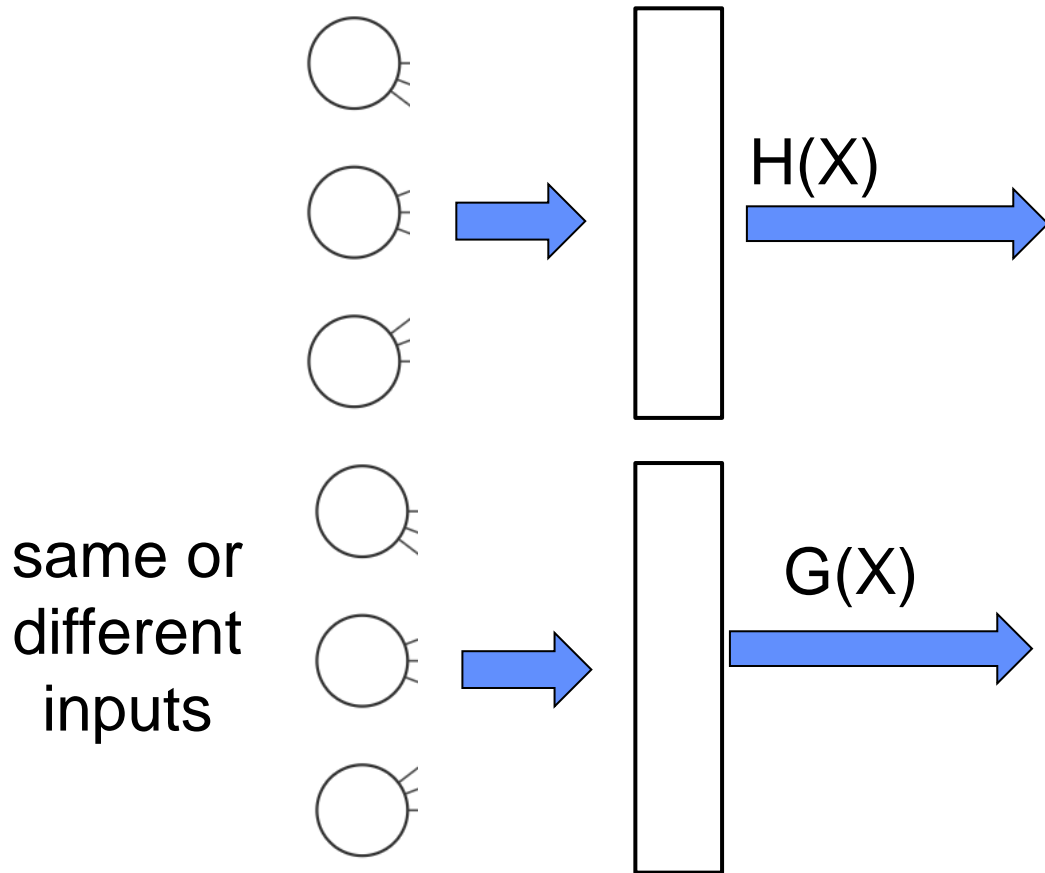


Use softmax for $G(X)$ to get gating weights

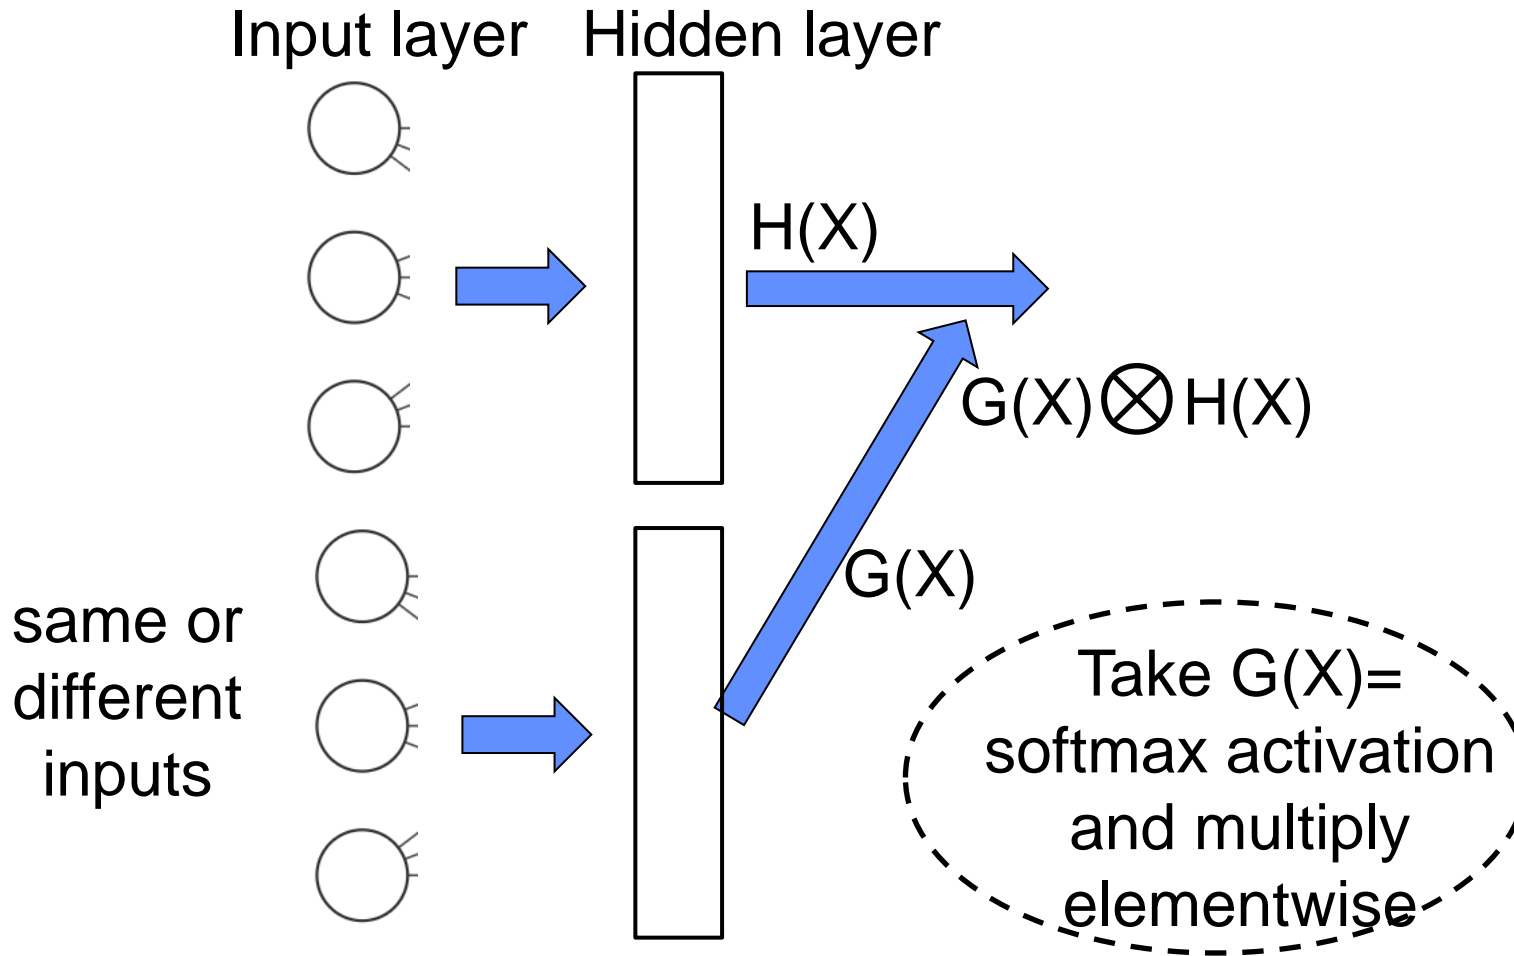

**Recall: softmax
normalizes outputs
into probability
weights**

Scaled Dot-Product Attention (very rough summary)

“Attention” mechanism in
language transformers
use a softmax gate

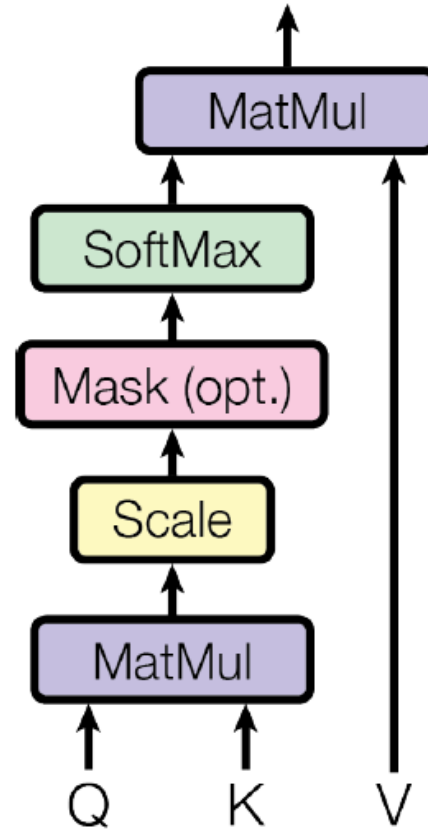

The gate is applied to possible
Values (V) for decoding


English vs French Words
‘align’ to make a gate

Vaswani, et al. 2017
Attention Is All You Need (for Transformers)

Outline


- Gate connection idea
- Skip and Residual
- Keras Model API
- Exercise MNIST Autoencoding

Recall the Multilayer Perceptron (MLP)

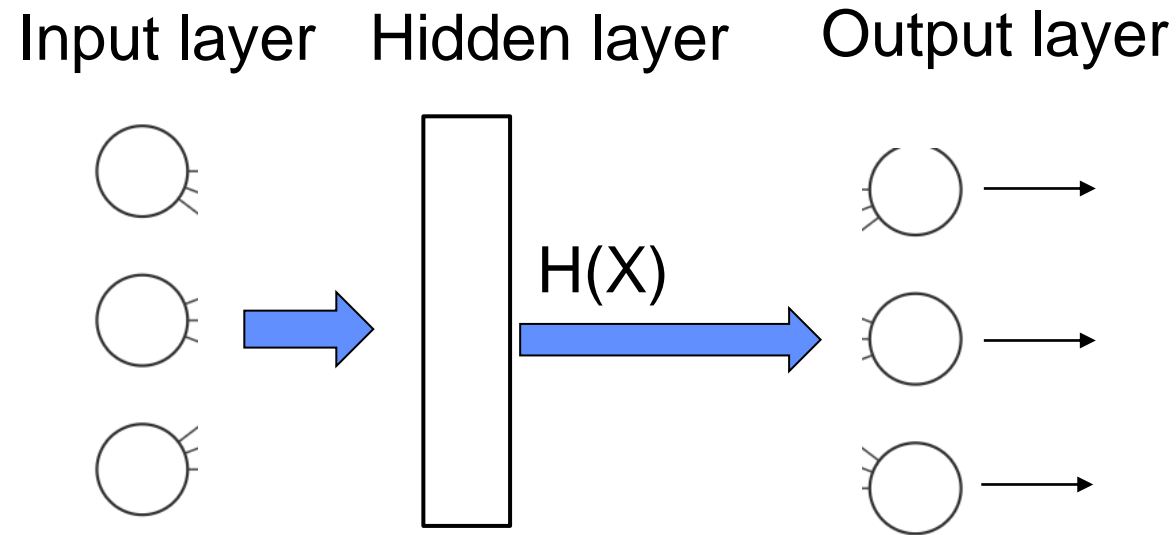


To help the MLP learn directly from input carry input forward

Input layer Hidden layer Output layer

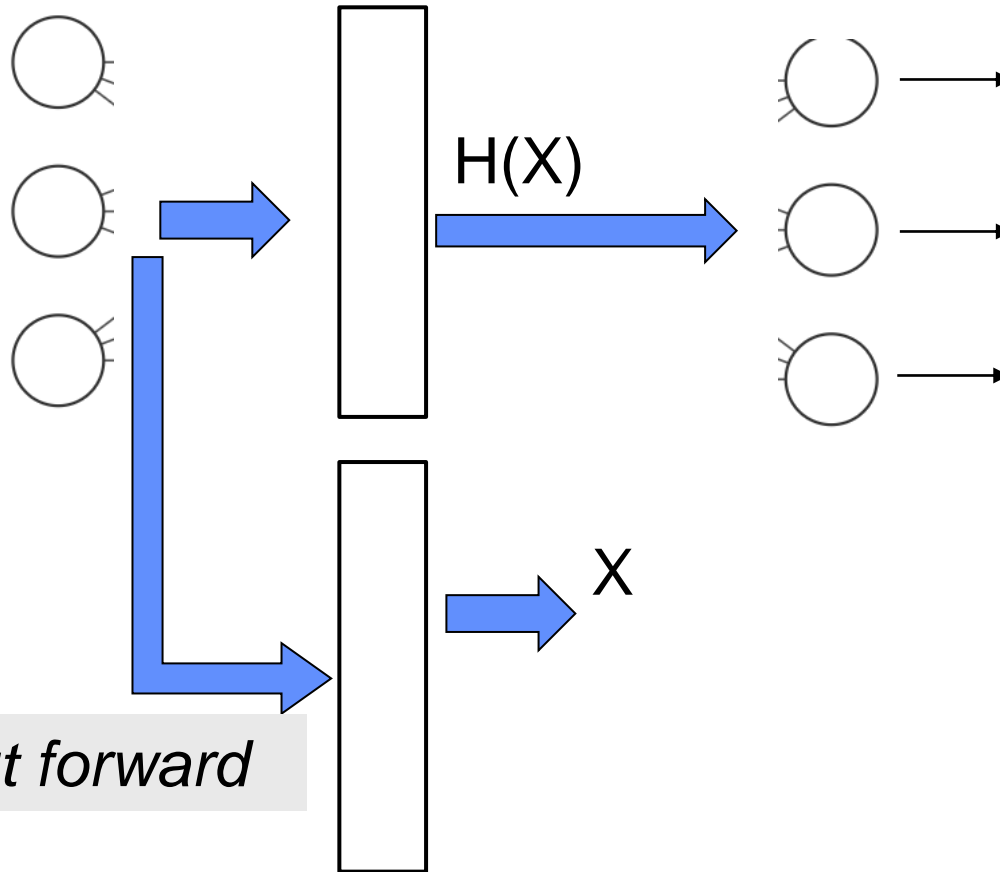


carry input forward


Concatenate input with hidden units into new layer

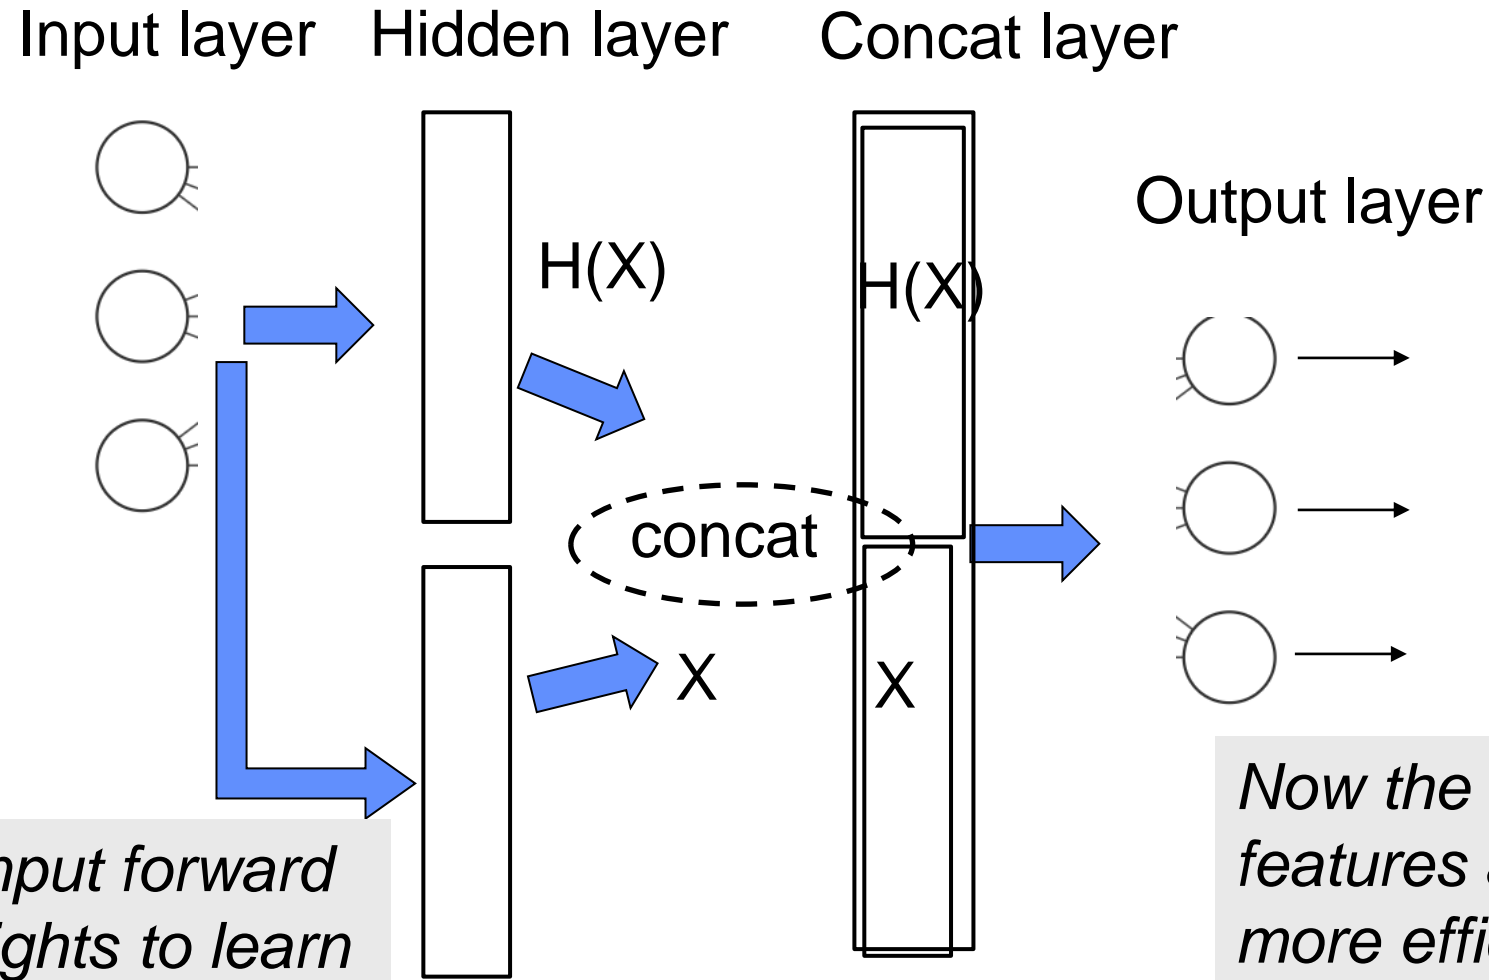


Can be done for any (or all) previous layer and *skip* any number of layers

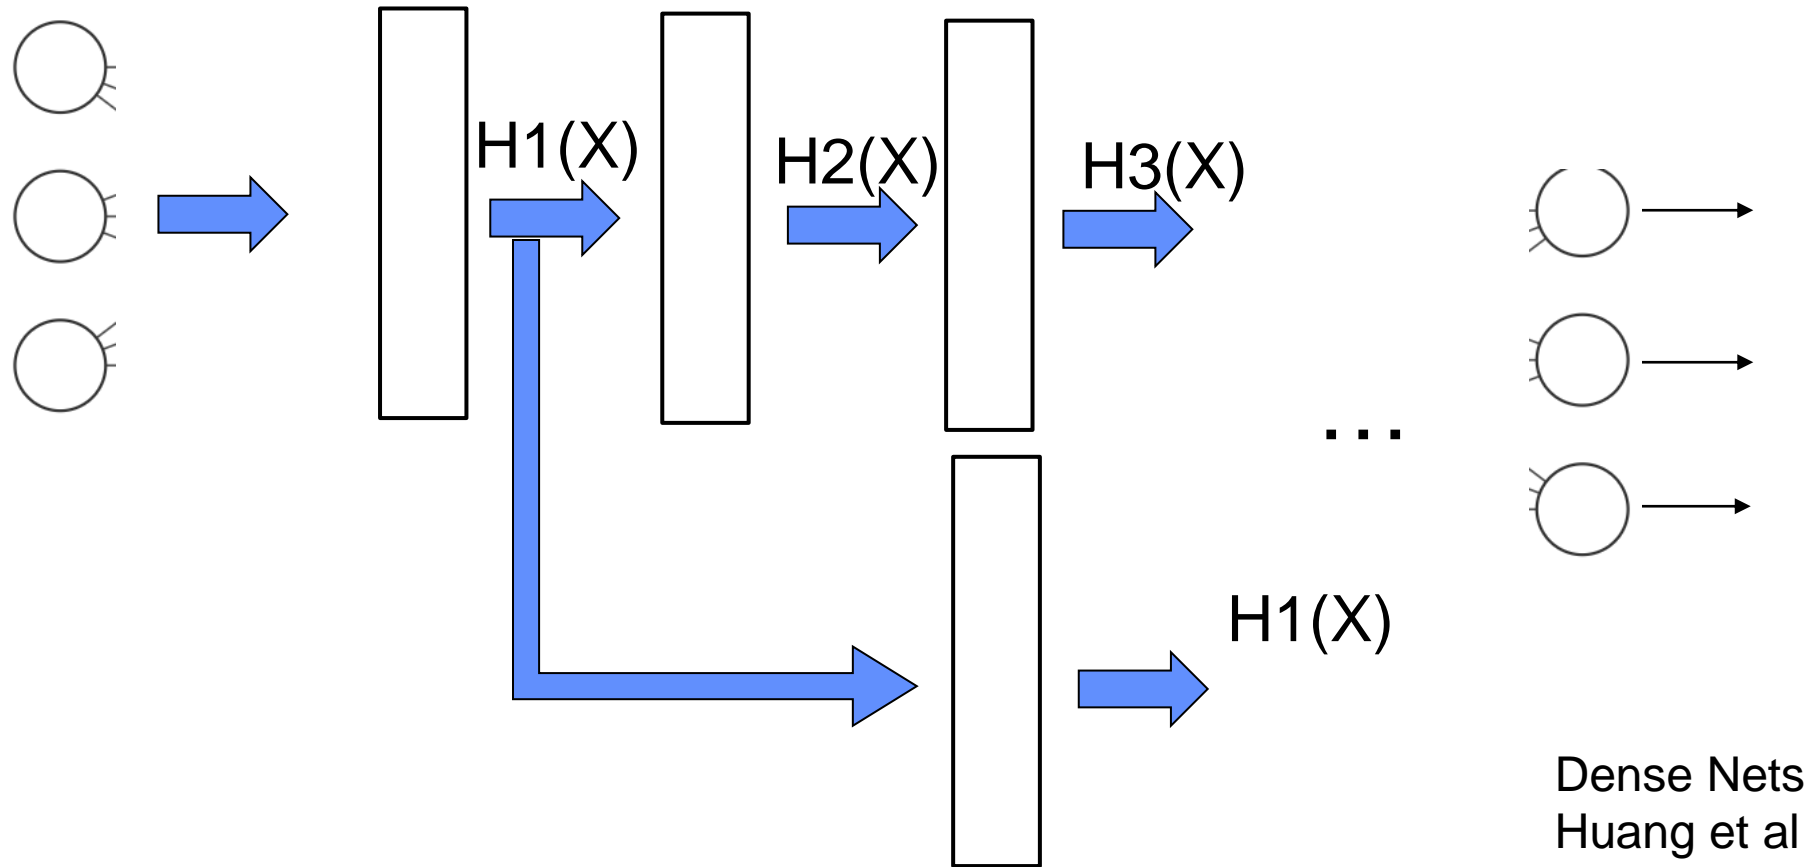


Recall: CNN architecture for MNIST classification

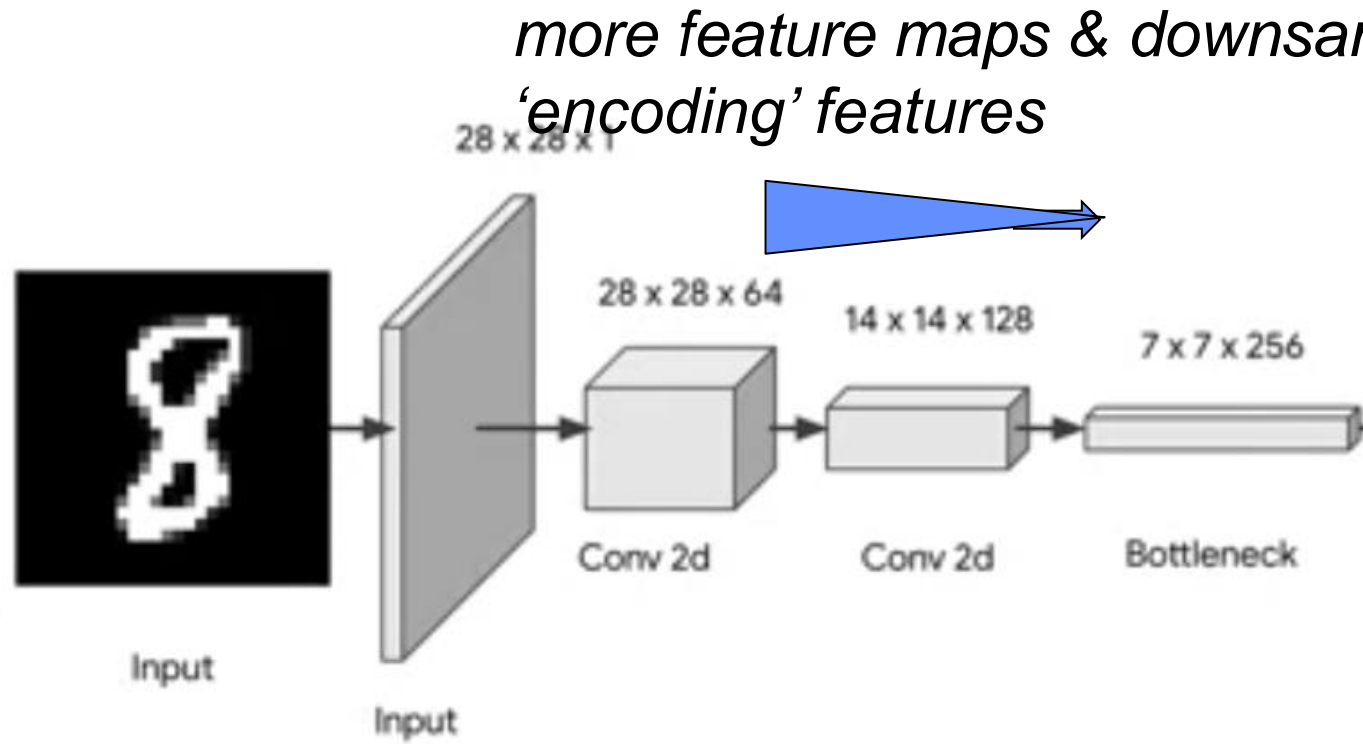


Consider: CNN architecture for MNIST classification

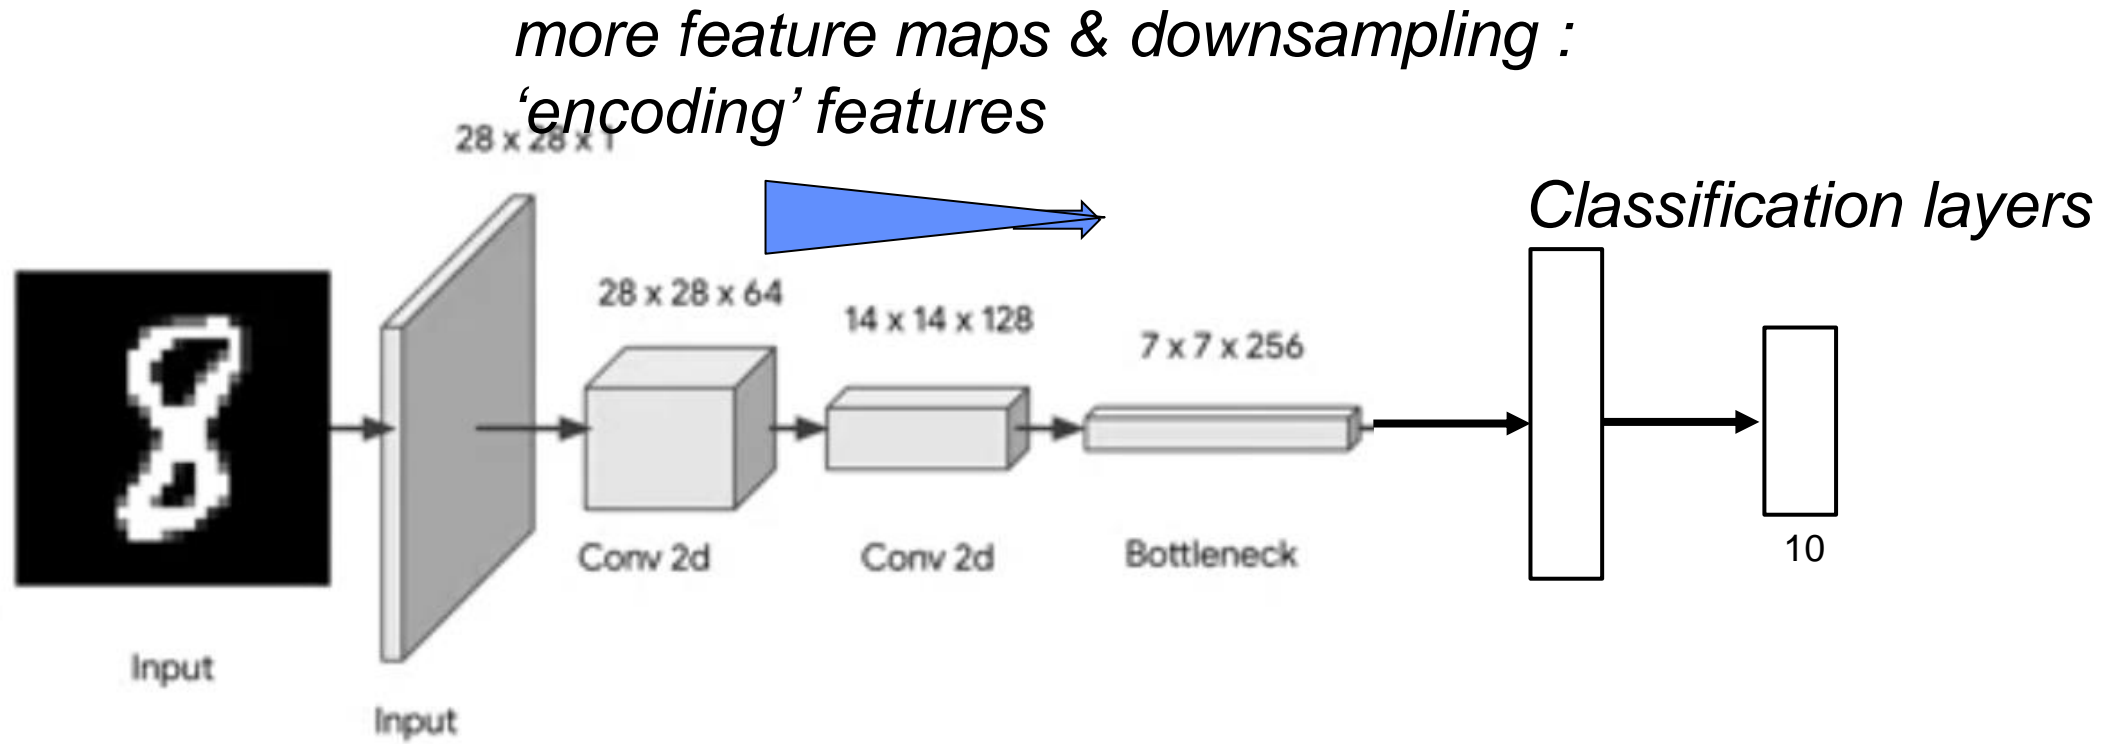


A CNN architecture for MNIST autoencoding

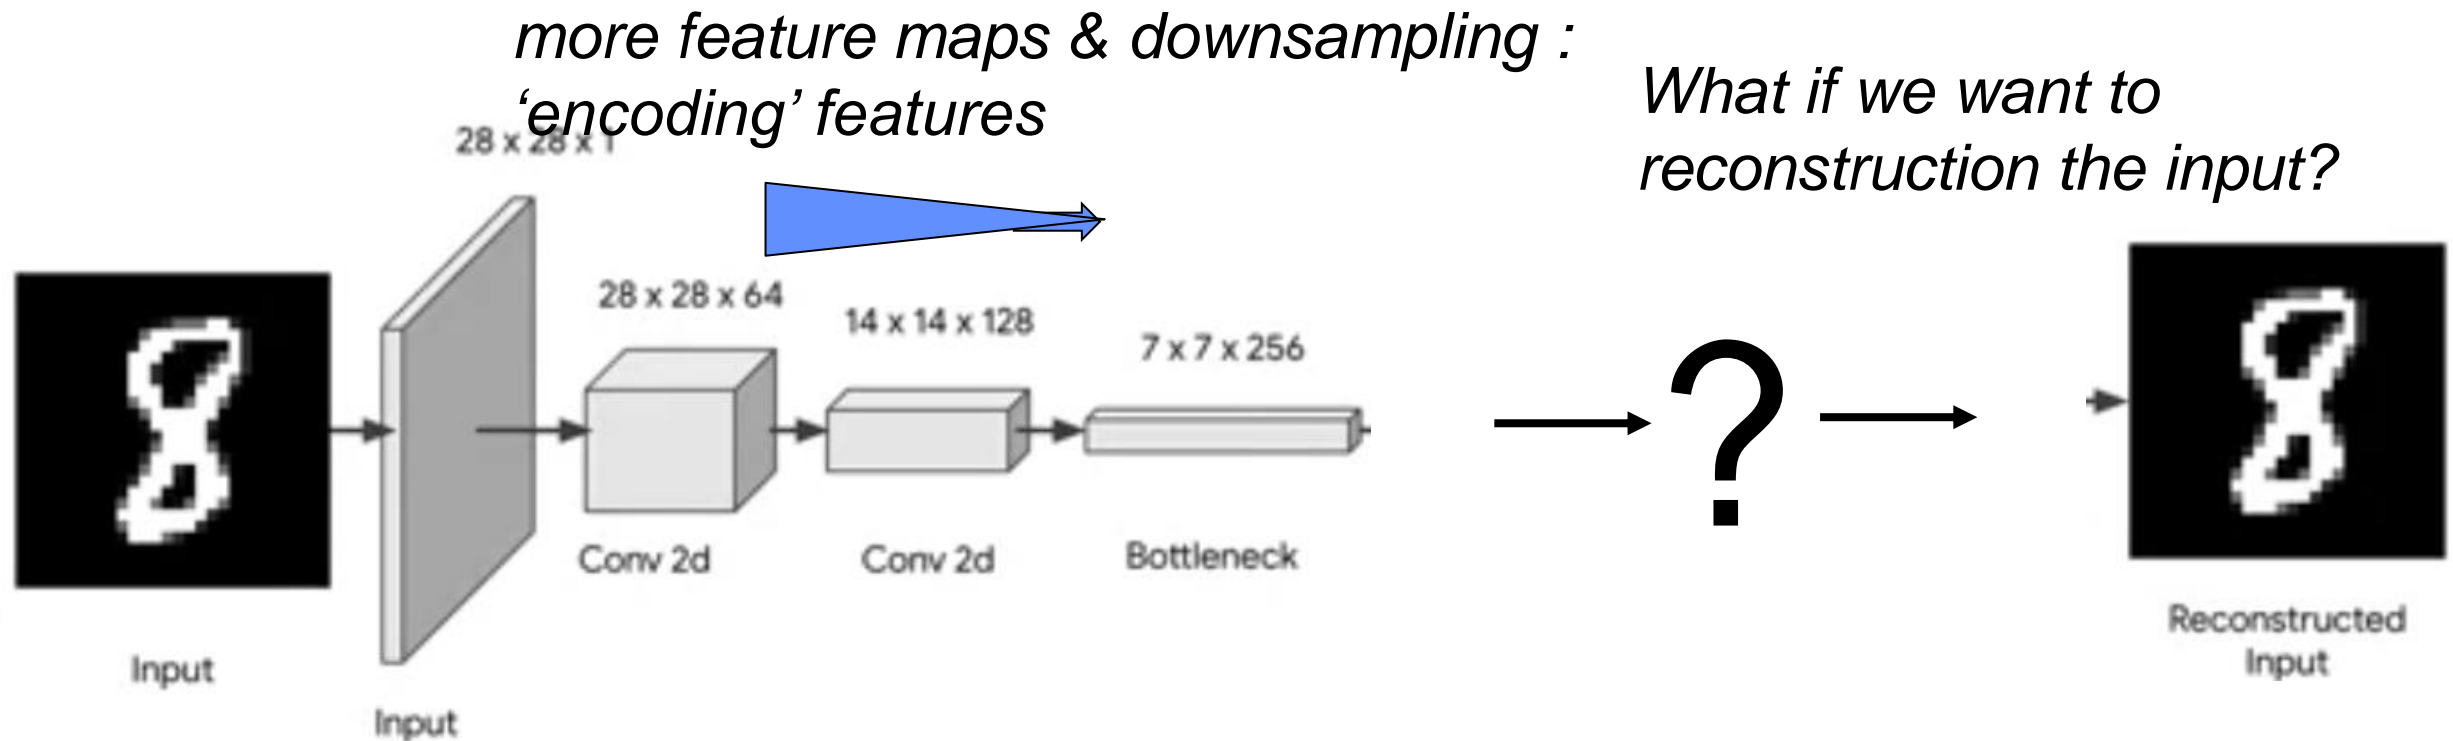

A CNN architecture for MNIST autoencoding

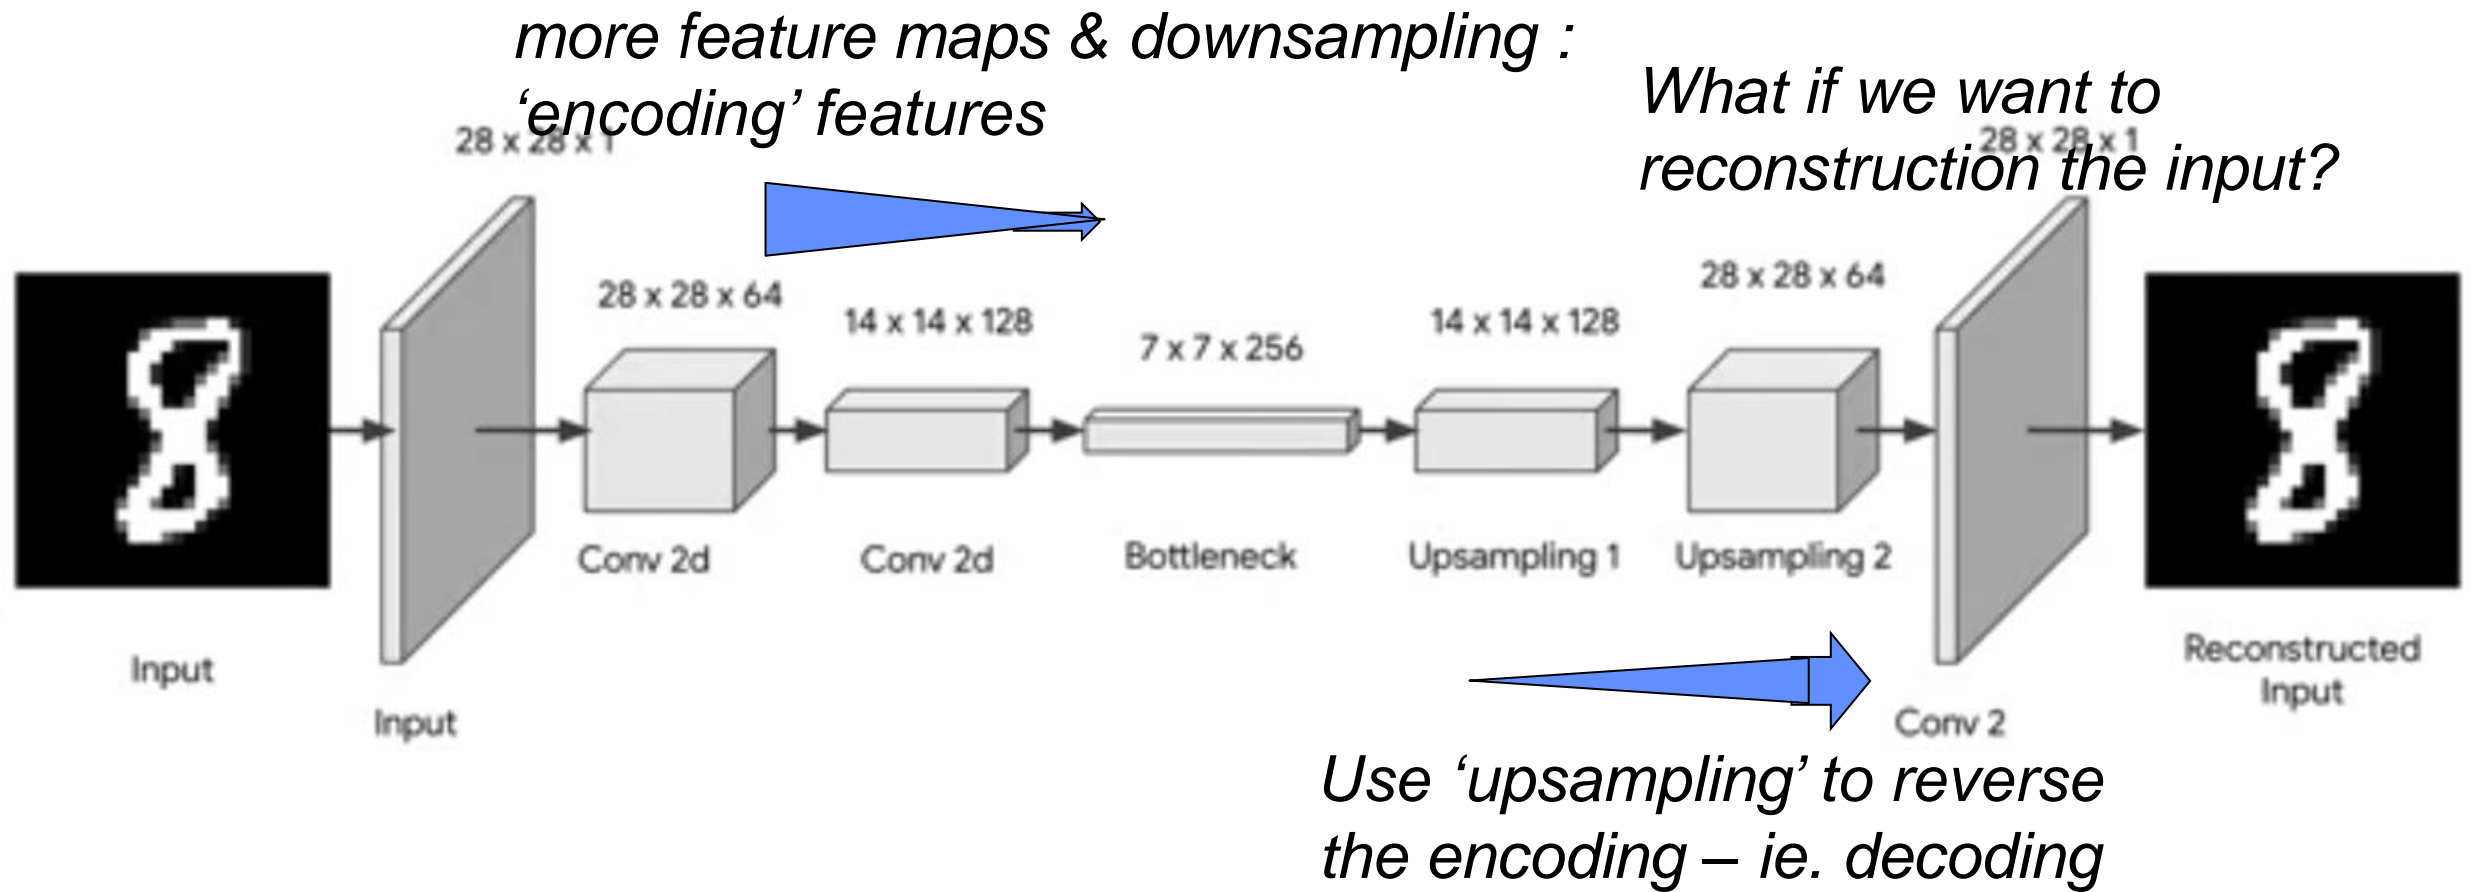


A CNN architecture for MNIST autoencoding

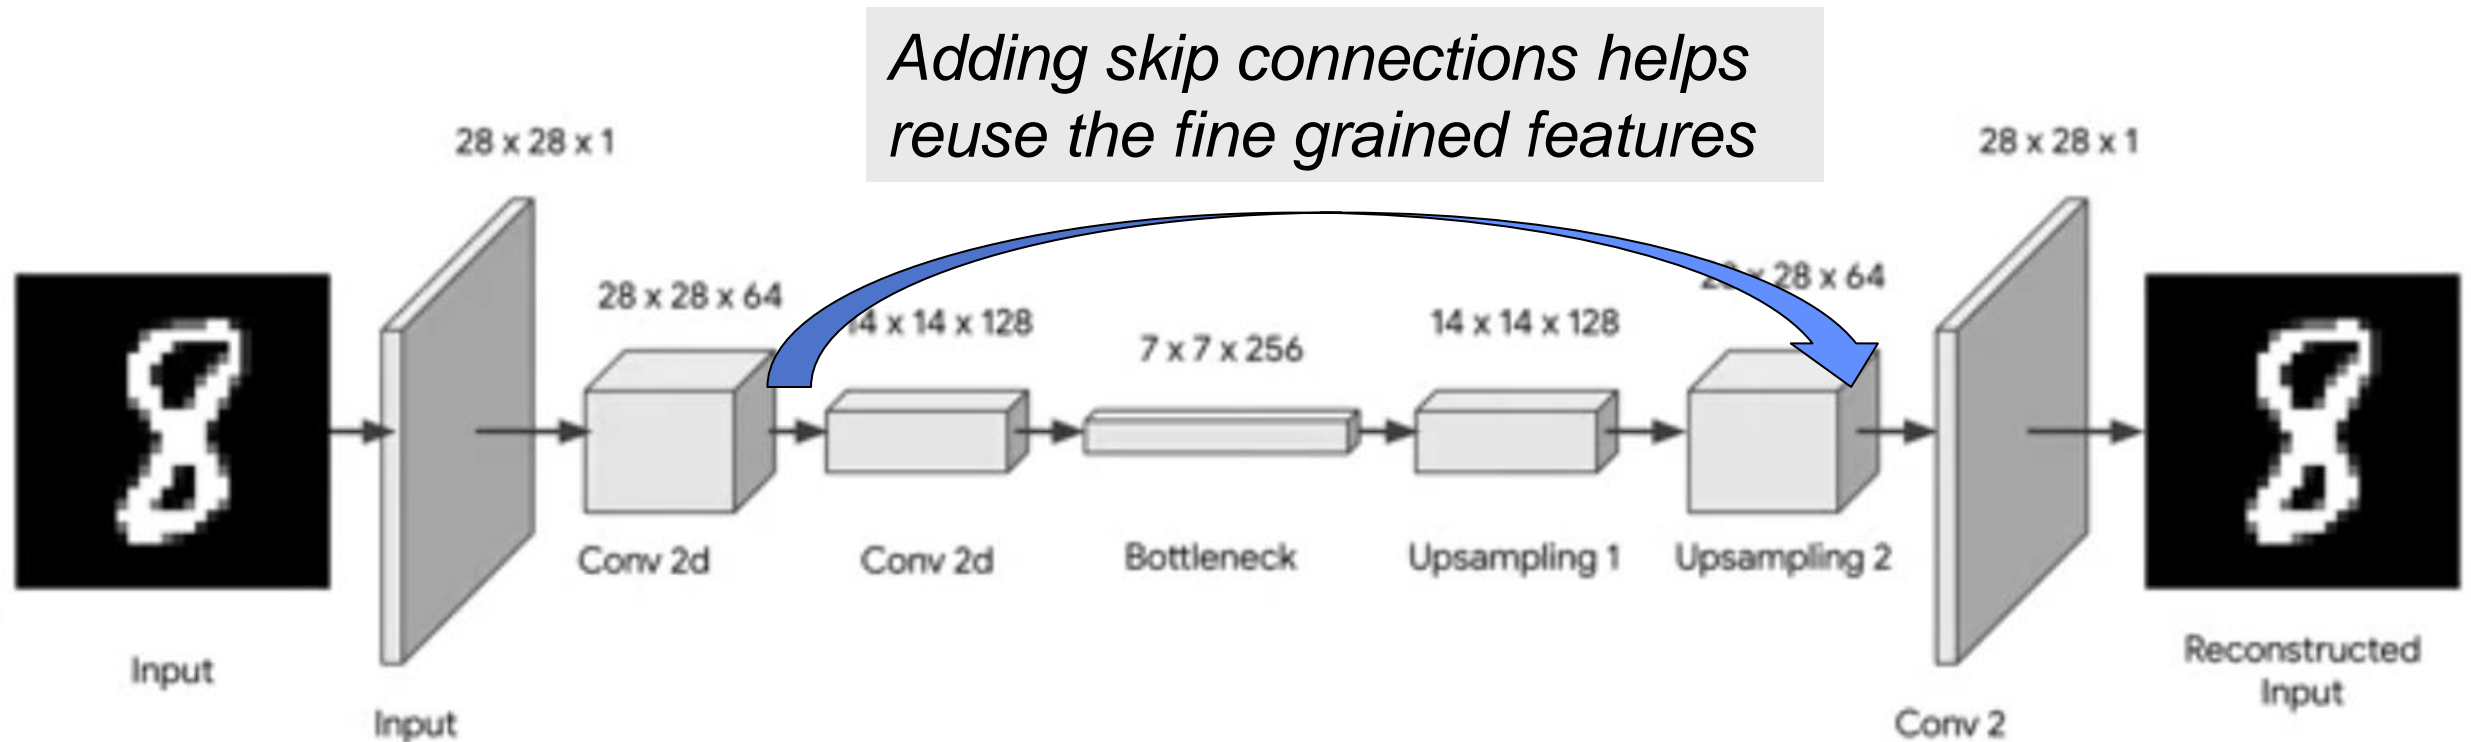

NOTE the 28x28 encoded maps have to be skipped ahead to where the 28x28 decoding maps are – which axis is concatenated?


Image Encoder-Decoder is a “UNET” architecture

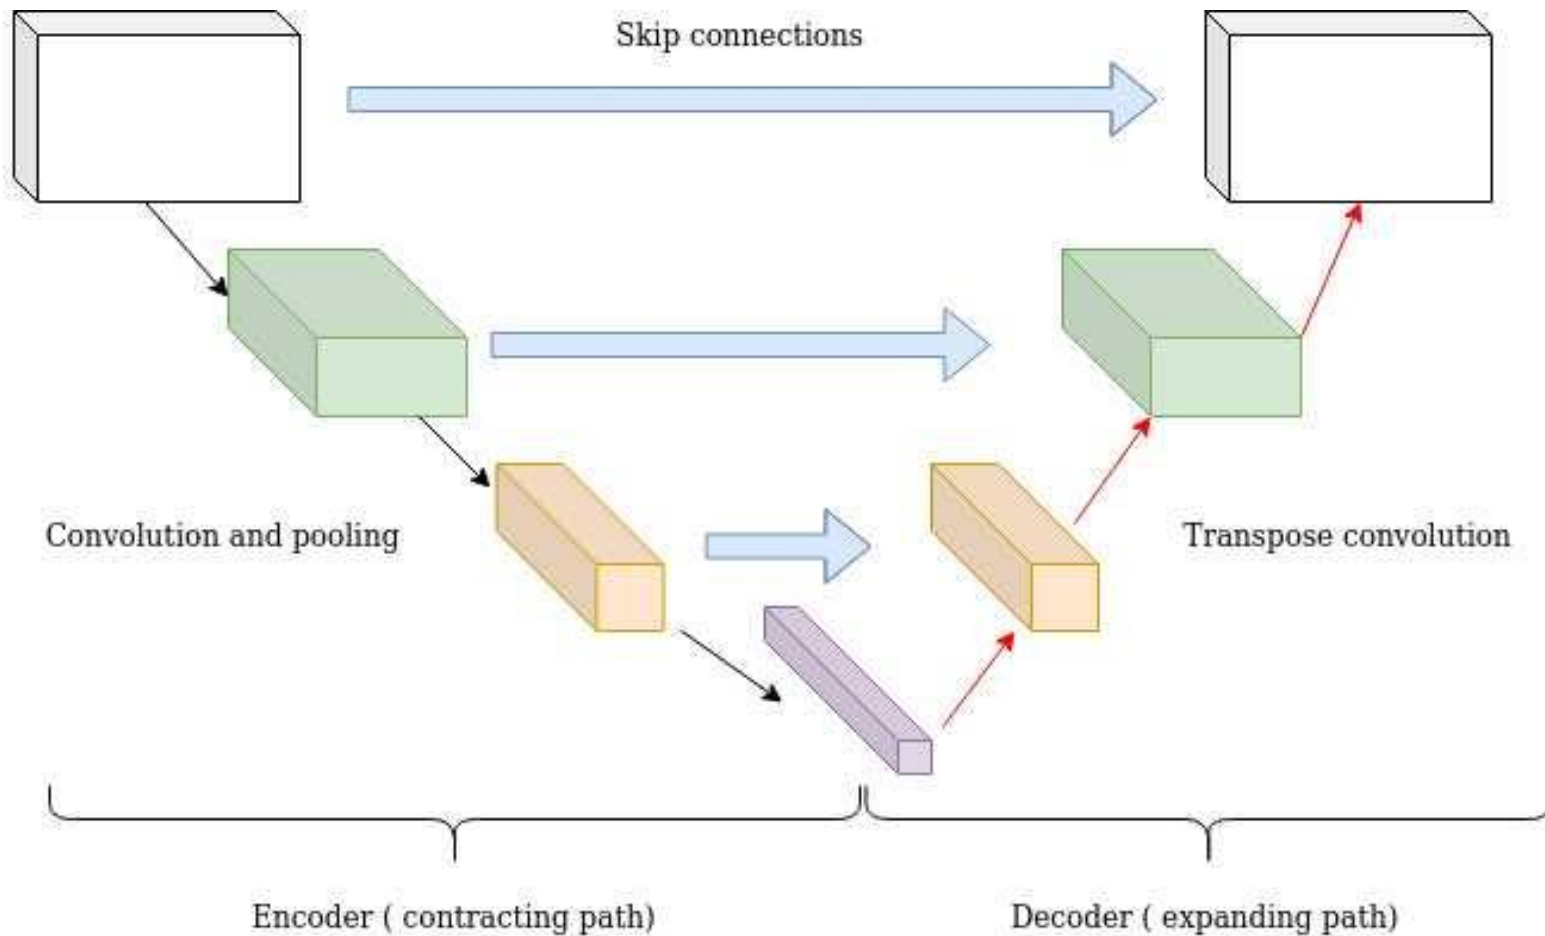

Outline


- Gate connection idea
- Skip and **Residual**
- Keras Model API
- Exercise MNIST Autoencoding

Consider: Can we keep adding deep layers?

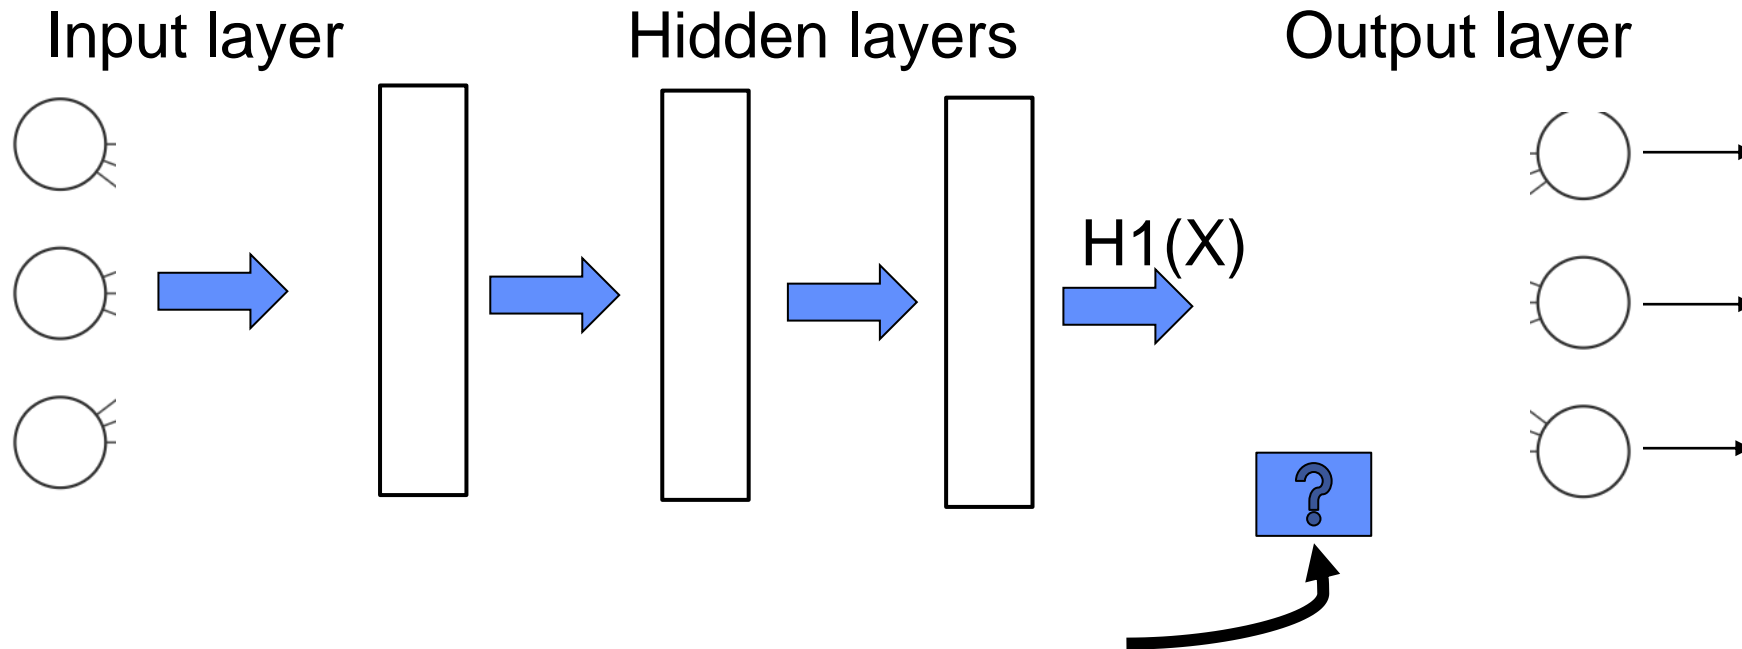


Given some deep network,
should I add another layer?
What should a new layer learn?

Consider: Can we keep adding deep layers?

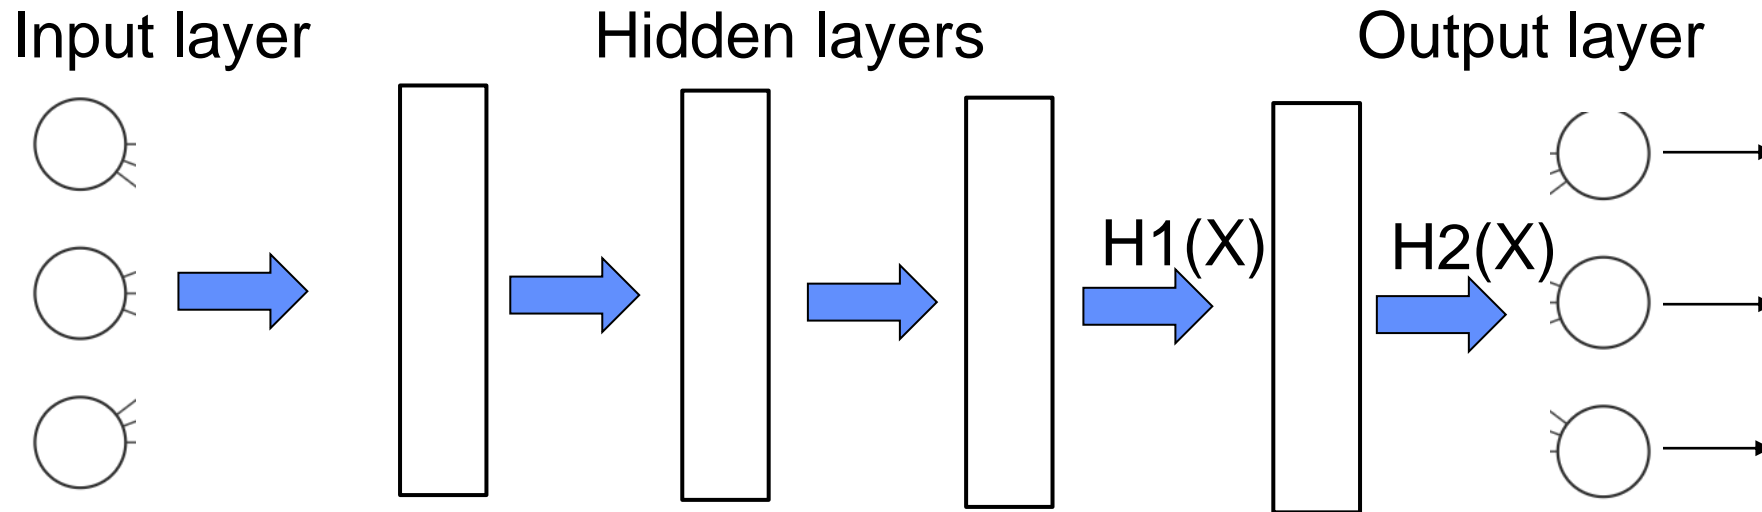


If $H1(X)$ is good then this new layer could be unnecessary,
Eg $H2(X)$ should be just $H1(X)$

Skip with addition makes a 'residual' connection

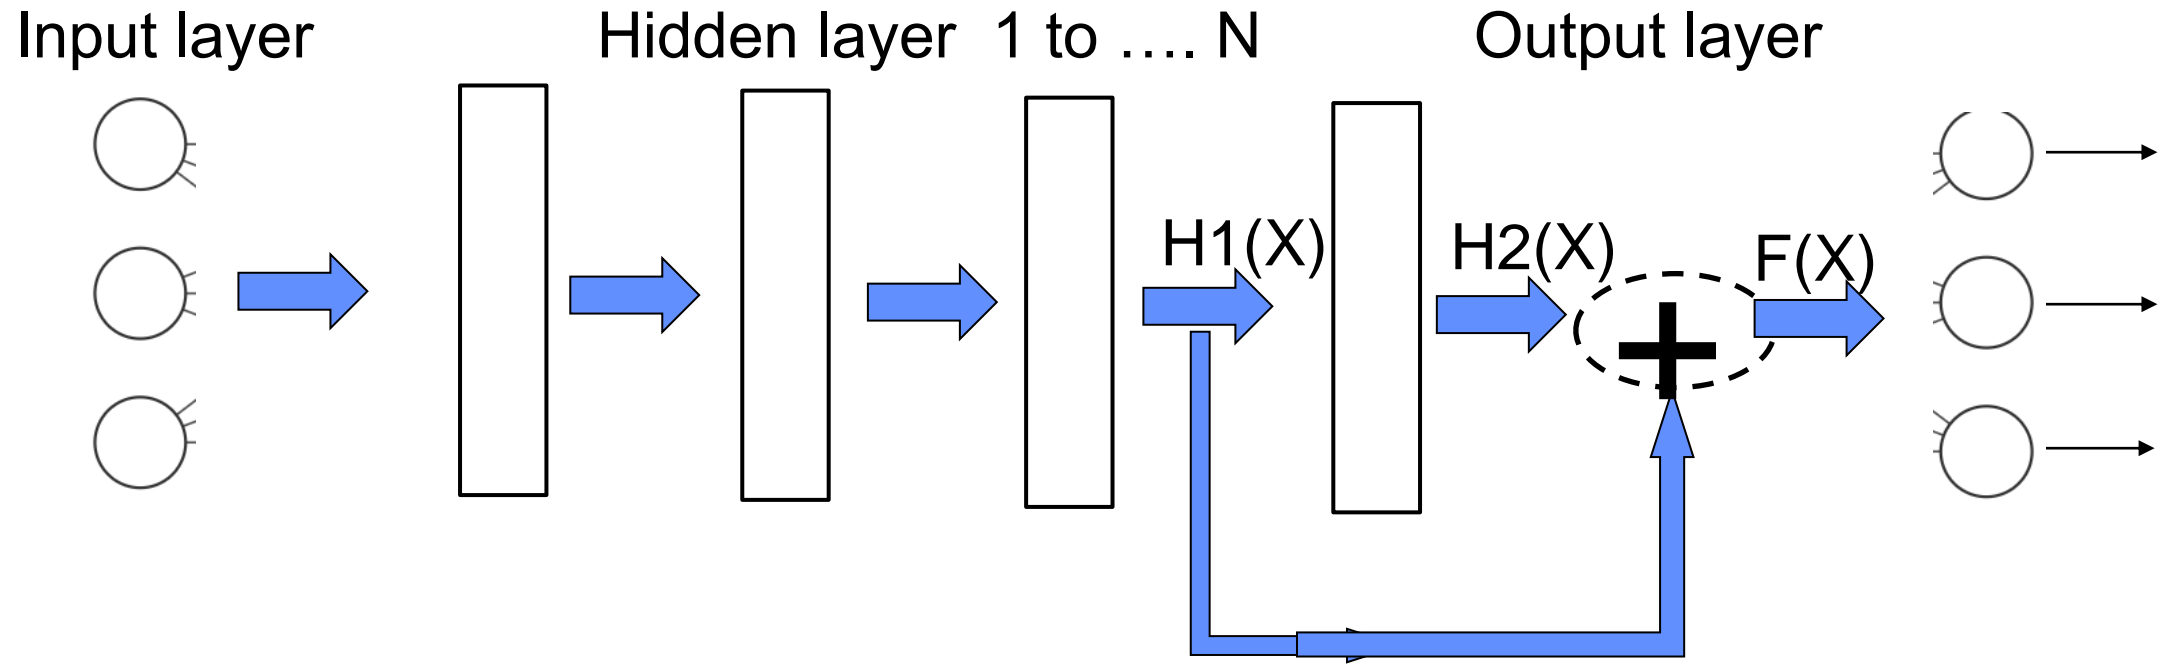

Make it easy for next layer to learn nothing –
conversely, use $F(X)=H2(X)+H1(X)$ so that $H2(X)=F(X)-H1(X)$.
Thus, the $H2()$ function learned is a *residual* function


“Resnet” residual connections help deeper learning

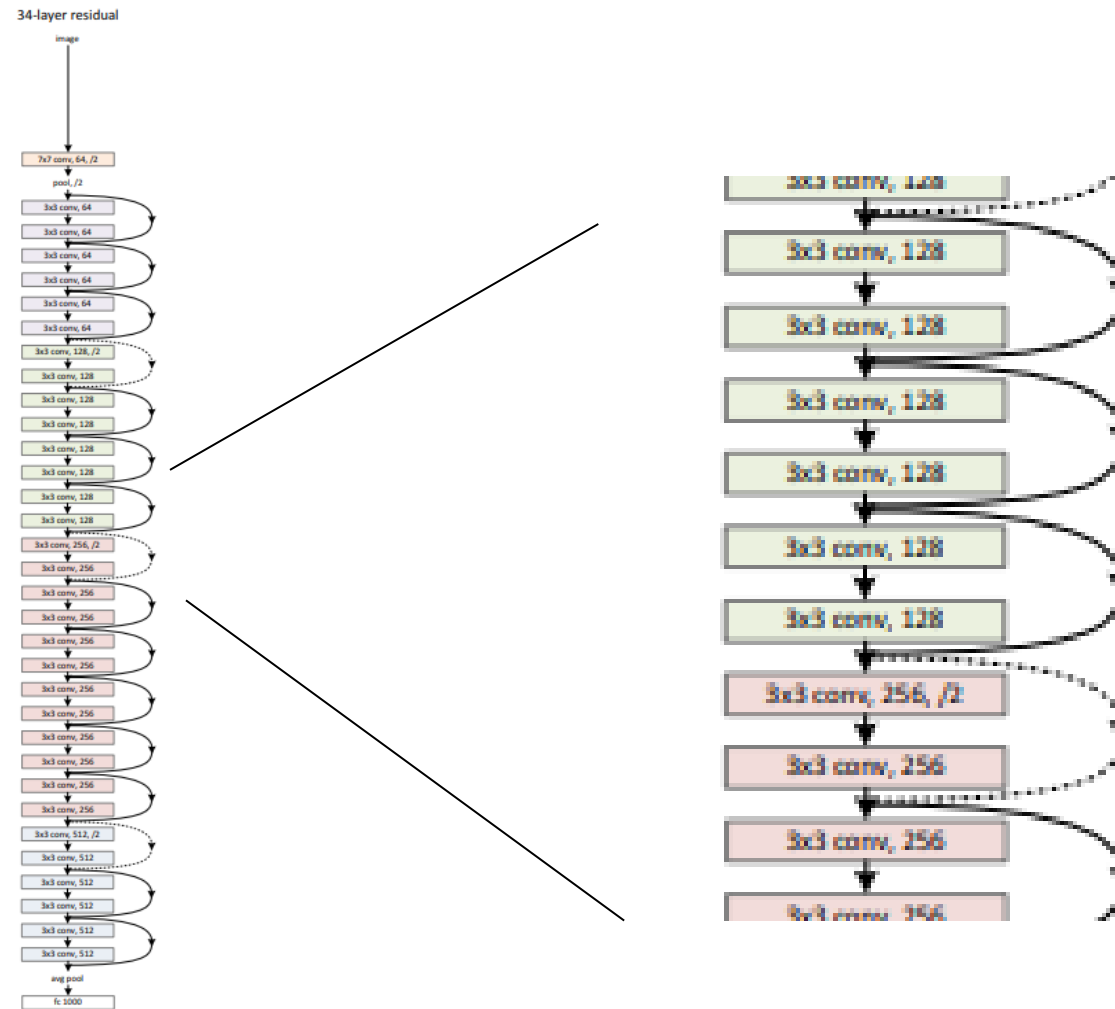

*Deep Residual Learning,
He et.al, 2015*


Summary: useful connections for architectures, and the intuitions

Softmax for gating

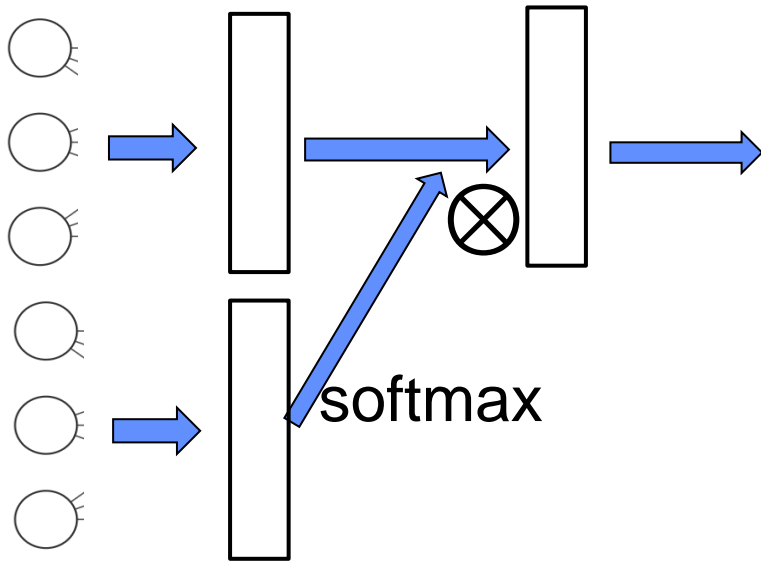


Recurrent nets,
language transformer nets

Skip connections
for feature reuse

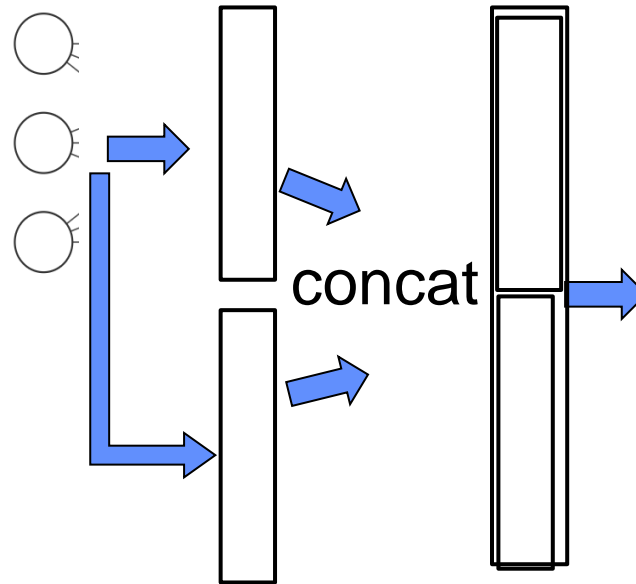

UNET, also
feedforward nets..

Residual connections
help deeper learning

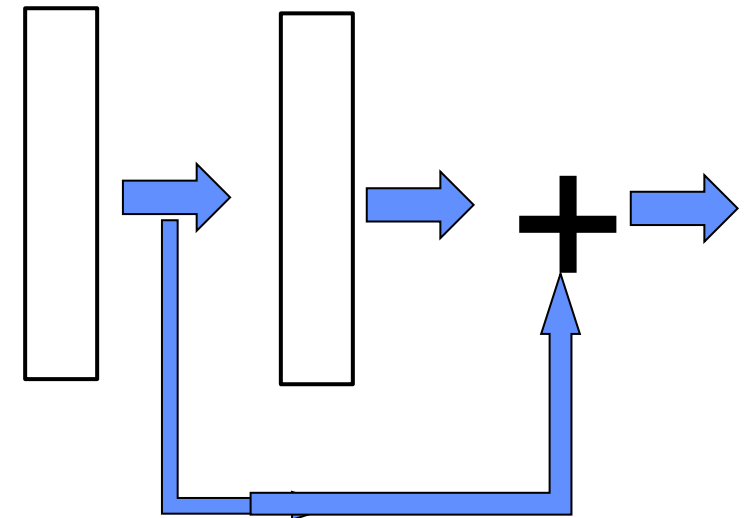

Resnet, large image
classification

Outline

- Gate connection idea
- Skip and Residual
- **Keras Model API**
- Exercise MNIST Autoencoding

Keras: Sequential API VS Functional API

```
#specify the neural network model and Learning parameters  
my_model = tf.keras.models.Sequential([  
    tf.keras.layers.Flatten(input_shape=(28, 28)),  
    tf.keras.layers.Dense(32,activation='relu'),  
    tf.keras.layers.Dense(10,activation='softmax')])  
my_model.summary()
```

*A sequence of layers:
the inputs are assumed
to be in order*

Keras: Sequential API VS Functional API

```
#specify the neural network model and learning parameters
my_model = tf.keras.models.Sequential([
    tf.keras.layers.Flatten(input_shape=(28, 28)),
    tf.keras.layers.Dense(32,activation='relu'),
    tf.keras.layers.Dense(10,activation='softmax')])
my_model.summary()
```

*A sequence of layers:
the inputs are assumed
to be in order*

```
#specify the neural network model and learning parameters
inputs = tf.keras.layers.Input(shape=(28, 28, 1,))
inputs_flattened = tf.keras.layers.Flatten()(inputs)
hidden_layer = tf.keras.layers.Dense(32,activation='relu')(inputs_flattened)
output_layer = tf.keras.layers.Dense(10,activation='softmax')(hidden_layer)
```

*A sequence of functions:
Input layer(s) are specified*

Keras: Sequential API VS Functional API

#specify the neural network model and learning parameters

```
my_model = tf.keras.models.Sequential([
    tf.keras.layers.Flatten(input_shape=(28, 28)),
    tf.keras.layers.Dense(32, activation='relu'),
    tf.keras.layers.Dense(10, activation='softmax')])
my_model.summary()
```

*A sequence of layers:
the inputs are assumed
to be in order*

#specify the neural network model and learning parameters

```
inputs = tf.keras.layers.Input(shape=(28, 28, 1,))
inputs_flattened = tf.keras.layers.Flatten()(inputs)
hidden_layer = tf.keras.layers.Dense(32, activation='relu')(inputs_flattened)
output_layer = tf.keras.layers.Dense(10, activation='softmax')(hidden_layer)

my_model = tf.keras.Model(inputs, output_layer)
my_model.summary()
```

*A sequence of functions:
Input layer(s) are specified*

*The Model() function figures out the full
path(s) to connect the input(s) to output(s)*

Outline

- Gate connection idea
- Skip and Residual
- Keras Model API
- **Exercise MNIST Autoencoding**

Exercise

- **MNIST autoencoder, reconstruct digits from noisy inputs**
- **Add skip connections with concatenation**

Note: make sure you see how the outputs from encoding layers are matched up to inputs for decoding layers!

14x14 encoding feature maps should be concatenated with 14x14 decoding maps

- **Review outputs to see improvements**

```

▶ def encoder(inputs):
    '''Defines the encoder with two Conv2D and max pooling layers.'''
    conv_1 = tf.keras.layers.Conv2D(filters=64, kernel_size=(3,3), activation='relu', padding='same')(inputs)
                                                    #padding same produces same output size
    max_pool_1 = tf.keras.layers.MaxPooling2D(pool_size=(2,2))(conv_1) #max pooling does the downsampling

    conv_2 = tf.keras.layers.Conv2D(filters=128, kernel_size=(3,3), activation='relu', padding='same')(max_pool_1)
    max_pool_2 = tf.keras.layers.MaxPooling2D(pool_size=(2,2))(conv_2)

    return max_pool_2, conv_1, conv_2


```

```


In [7]: ▶ def convolutional_auto_encoder():
    '''Builds the entire autoencoder model.'''
    inputs = tf.keras.layers.Input(shape=(28, 28, 1))
    encoder_output, enc_conv1_output, enc_conv2_output = encoder(inputs)
    bottleneck_output = bottle_neck(encoder_output)
    decoder_output = decoder(bottleneck_output, enc_conv1_output, enc_conv2_output)

    model = tf.keras.Model(inputs=inputs, outputs=decoder_output)
    return model

```

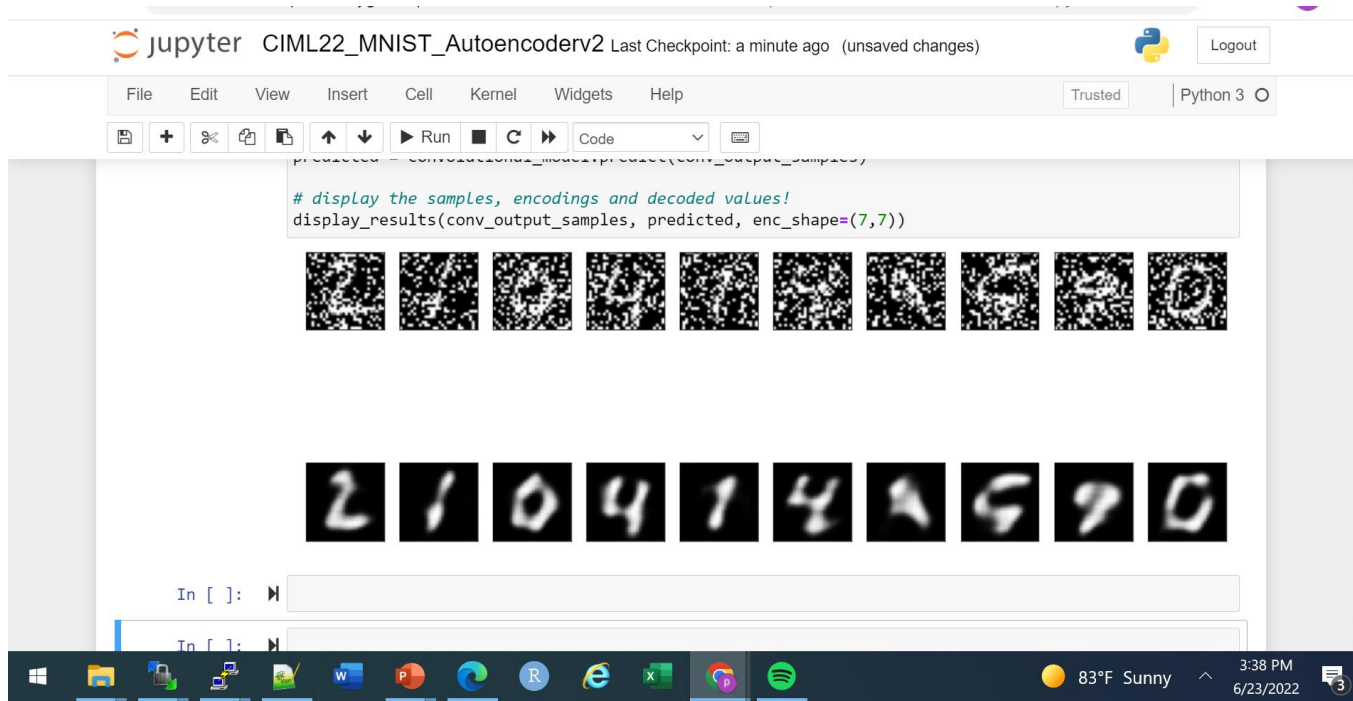

With out skip
20 epochs
Loss 0.1664

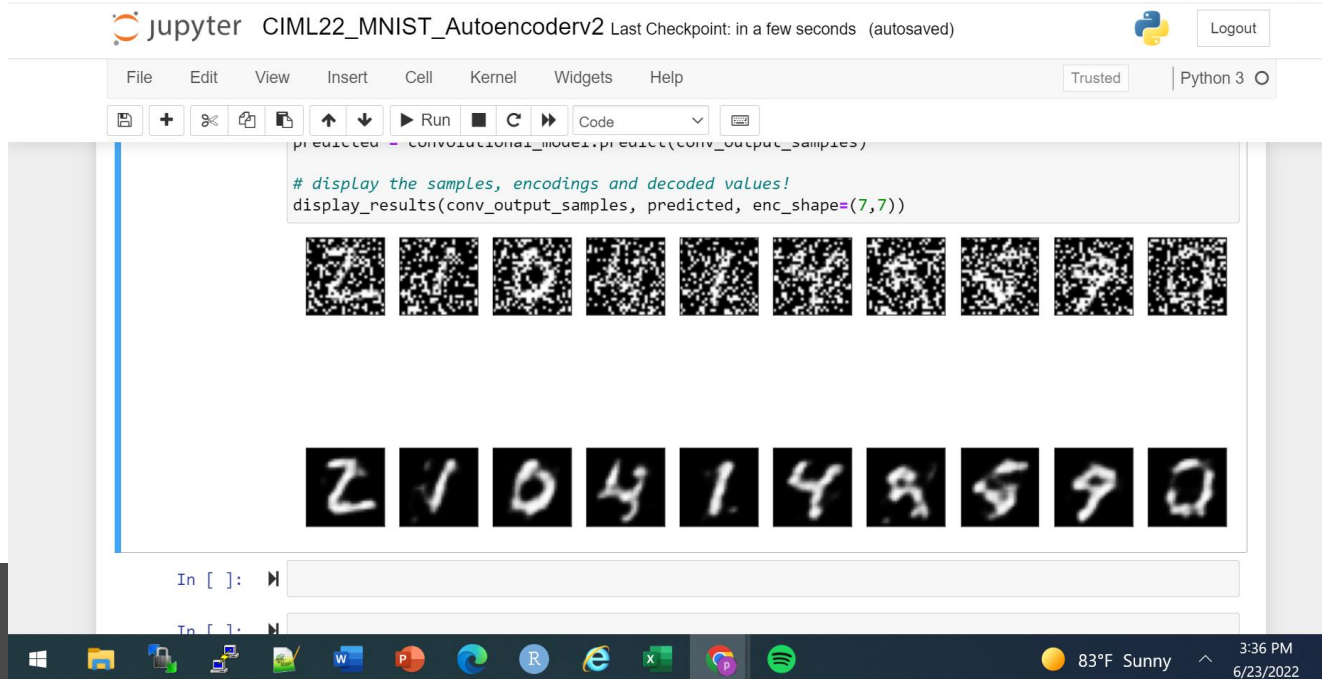

With skip,
20 epochs loss 0.14

Are the numbers a little bit
more reconstructed?