Arrange the following words in a meaningful order :

1. Andhra Pradesh
2. Universe
3. Tirupathi
4. World
5. India

- 2, 4, 3, 1, 5
- 2, 4, 5, 1, 3
- 3, 1, 5, 2, 4
- 3, 1, 5, 4, 2

1 point

Find out the pair which is different from the other given pairs.

- Mason-Wall
- Cobbler-Shoes
- Farmer-Crop
- Tailor-Dyeing

1 point

If all Hennas are Dinas, and some Dinas are Tinas, which of the following statements must be true?

- Some Hennas are Tinas
- Some Tinas are not Hennas
- All Hennas are Tinas
- None of the above

1 point

A Guarantee is a promise or formal assurance that attests to the quality of a product. It is generally given in writing by the company or verbally by a person selling the product. It says that a product will be repaired, replaced or money will be refunded if it is not of a specified quality. Which of the following situations is the best example of the Guarantee?

- Tom bought a cell phone with the highest consumer ratings in its category.
- The salesperson assures Peter that he is buying a camera with a guarantee.
- Peter buys a used camera from John. John assures that it is a quality product and he will refund the money if the camera does not work properly.
- The auto body shop is specialized in refurbishing and selling used cars.

1 point

If ‘M’ is written as ’13’ in a certain code, how will ‘LION’ be written in the same code?

- 12247
- 12346
- 13247

- 13347

1 point

If '+'stands for division, '÷' stands for multiplication, 'x' stands for subtraction and '-' stands for addition, which one of the following is correct?

- 18 ÷ 6 – 7 + 5 x 2 = 20
- 18 + 6 ÷ 7 x 5 – 2 = 18
- 18 x 6 + 7 ÷ 5 - 2 = 16
- 18 ÷ 6 x 7 + 5 - 2 = 22

1 point

The radius of the top and bottom of a bucket of slant height 35 cm are 25 cm and 8 cm. The curved surface of the bucket is:

- 4000 sq.cm
- 3500 sq.cm
- 3630 sq.cm
- 3750 sq.cm

1 point

A tank is made of the shape of a cylinder with a hemispherical depression at one end. The height of the cylinder is 1.45 m and radius is 30 cm. The total surface area of the tank is:

- 30 m
- 3.3 m
- 30.3 m
- 3300 m

1 point

The length of a tangent drawn from a point at a distance of 10 cm of circle is 8 cm. The radius of the circle is

- 4 cm
- 5 cm
- 6 cm
- 7 cm

1 point

If the sum of frequencies is 24, then the value of x in the observation: x, 5,6,1,2, will be;

- 4
- 6
- 8
- 10

Week 1 : Assignment

The due date for submitting this assignment has passed.

Due on 2023-08-09, 23:59 IST.

As per our records you have not submitted this assignment.

1 point

What will be the value of my variable at the end of the loop.



- 50
- 40
- 49
- 0

No, the answer is incorrect.
Score: 0

Accepted Answers:
40

1 point

Which of the following is not a type of block in Scratch?

- Motion
- Looks
- Sound
- Jump

No, the answer is incorrect.
Score: 0

Accepted Answers:
Jump

1 point

What is the main function of the "if" block in Scratch?

- To repeat a set of instructions

- To create a loop
- To control the flow of the program based on a condition
- To play a sound

No, the answer is incorrect.
Score: 0

Accepted Answers:
To control the flow of the program based on a condition


1 point
Which block in Scratch is used to control the movement of a sprite?

- Motion
- Looks
- Sound
- Control

No, the answer is incorrect.
Score: 0

Accepted Answers:
Motion

1 point
Imagine sprite to be a scooter. How many times scooter will move forward?

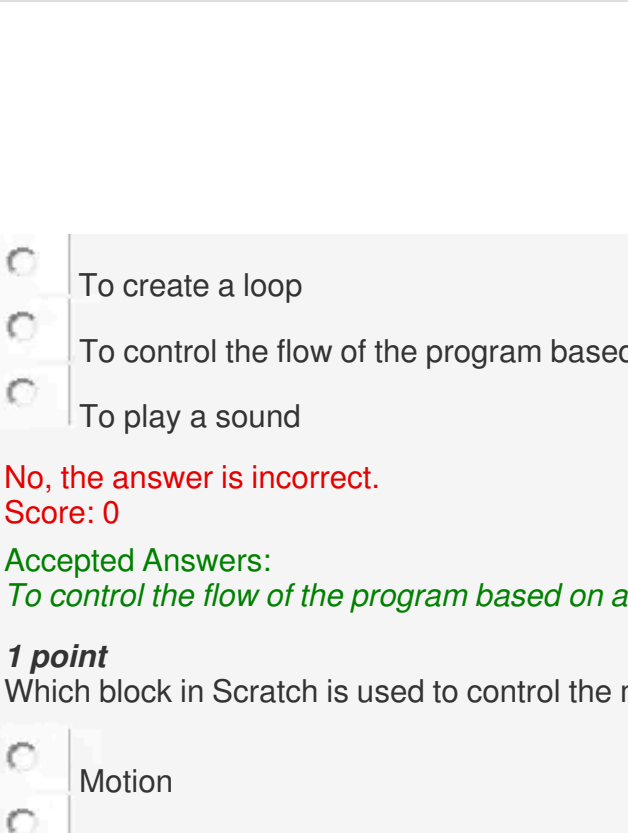

- 7
- 4
- 6

- 5

No, the answer is incorrect.
Score: 0

Accepted Answers:
5

1 point
Which block in Scratch is used to make a sprite say something?

- Motion
- Looks
- Sound
- Control

No, the answer is incorrect.
Score: 0

Accepted Answers:
Looks

1 point
What is the purpose of the "repeat" block in Scratch?

- To repeat a set of instructions a specific number of times
- To repeat a set of instructions forever
- To repeat a set of instructions based on a condition
- To play a sound repeatedly

No, the answer is incorrect.
Score: 0

Accepted Answers:
To repeat a set of instructions a specific number of times

1 point
Which block in Scratch is used to wait for a certain amount of time before continuing with the program?

- Motion
- Looks
- Sound
- Control

No, the answer is incorrect.
Score: 0

Accepted Answers:
Control

1 point
Which block in Scratch is used to detect when a sprite touches another sprite?

- Motion

- Looks
- Sound
- Sensing

No, the answer is incorrect.
Score: 0

Accepted Answers:
Sensing

1 point
What is the purpose of the "broadcast" block in Scratch?

- To send a message to another sprite
- To play a sound
- To move a sprite
- To change the background color

No, the answer is incorrect.
Score: 0

Accepted Answers:
To send a message to another sprite

Week 2 : Assignment

The due date for submitting this assignment has passed.

Due on 2023-08-09, 23:59 IST.

As per our records you have not submitted this assignment.

1 point
Which of the following is a high-level programming language?

- Assembly
- C
- Python
- Machine Language

No, the answer is incorrect.
Score: 0

Accepted Answers:
Python

1 point
Which of the following is an example of a front-end programming language?

- PHP
- Java

- HTML
- SQL

No, the answer is incorrect.
Score: 0

Accepted Answers:
HTML

1 point
Which of the following is used to store data in a programming language?

- [ ] Variables
- [ ] Arrays
- [ ] Loops
- [ ] Conditionals

No, the answer is incorrect.
Score: 0

Accepted Answers:
Variables
Arrays

1 point
Which statement will print ‘The joy of computing’?

- print(The joy of computing)
- print The joy of computing
- printf(‘The joy of computing’)
- print(‘The joy of computing’)

No, the answer is incorrect.
Score: 0

Accepted Answers:
print(‘The joy of computing’)

1 point
What should be the value of to print all numbers from 0-10

```
for i in range( _ ):
    print(i)
```

- 10
- 9
- 11
- None of the above

No, the answer is incorrect.
Score: 0

Accepted Answers:
11

1 point
Which of the following keyword is used to declare a function in a programming language?

- def
- var
- int
- float

No, the answer is incorrect.
Score: 0

Accepted Answers:
def

1 point
What will be the output of the following code?

```
b = 0

for i in range(10):
    b = b+i

print(b)
```

- 0
- 45
- 43
- 50

No, the answer is incorrect.
Score: 0

Accepted Answers:
45

0 points
What value will c store in it after the execution of the below code?

```
c=b**3
```

- Value of b multiplied by 3
- Cube of b
- Value of b multiplied with 3 twice
- It will throw an error

No, the answer is incorrect.
Score: 0

Accepted Answers:
It will throw an error

1 point
What will be the output? suppose the input is 30

```
number = input("Enter Number")

new_number = number * 2

print(new_number)
```

- 60
- Error
- 3030
- 30

No, the answer is incorrect.
Score: 0

Accepted Answers:
3030

1 point
What is the output for the following program?

```
a=3
b=4
c=a>b
print(c)
```

- True
- False
- It will display an error message
- Boolean

No, the answer is incorrect.
Score: 0

Accepted Answers:
False

Week 3 : Assignment

The due date for submitting this assignment has passed.

Due on 2023-08-16, 23:59 IST.

Assignment submitted on 2023-08-12, 22:44 IST

1 point
What will be the output of the following code?

```
L = [‘a’, ‘b’, ‘c’, ‘d’, ‘e’, ‘f’, ‘g’, ‘h’]

print(L[2:5])
```

- a, b, c
- a, b, c, d
- c, d, e
- c, d, e, f

No, the answer is incorrect.
Score: 0

Accepted Answers:
c, d, e

1 point
Which of the following is a valid way to declare a dictionary in Python?

- {1: "one", 2: "two", 3: "three"}
- [1: "one", 2: "two", 3: "three"]
- (1: "one", 2: "two", 3: "three")
- <1: "one", 2: "two", 3: "three">

Yes, the answer is correct.
Score: 1

Accepted Answers:
{1: "one", 2: "two", 3: "three"}

1 point
Which of the following method is correct to add an element at a specific position?

- insert()
- add()
- append()
- index()

No, the answer is incorrect.
Score: 0

Accepted Answers:
insert()

1 point
What is the correct syntax to add an item to the end of a list in Python?

- list.add(item)
- list.append(item)
- list.insert(item)
- list.extend(item)

Yes, the answer is correct.
Score: 1

Accepted Answers:
list.append(item)

1 point
Which of the following is not a valid data type in Python?

- integer
- string
- float
- character

Yes, the answer is correct.
Score: 1

Accepted Answers:
character

0 points
What is the output of the following code?

```
for i in range(1, 21):
    if i % 3 == 0 and i % 5 == 0:
        print("FizzBuzz")
    elif i % 3 == 0:
        print("Fizz")
    elif i % 5 == 0:
        print("Buzz")
    else:
        print(i)
```

- Prints numbers from 1 to 20
- Prints Fizz for multiples of 3 and Buzz for multiples of 5
- Prints FizzBuzz for multiples of 3 and 5
- None of the above

Yes, the answer is correct.
Score: 0

Accepted Answers:
Prints FizzBuzz for multiples of 3 and 5

1 point
What is the output of the following code?
a = 5
b = 2

print(a // b)

- 2
- 2.5
- 3
- 2.0

Yes, the answer is correct.
Score: 1

Accepted Answers:
2

1 point
What is the output of the following code?
s = "hello"
print(s[::-1])

- "hello"
- "olleh"
- "hlo"
- "leh"

Yes, the answer is correct.
Score: 1

Accepted Answers:
"olleh"

1 point
What is the output of the following code?
a = 10
b = 5
c = a % b
print(c)

- 2
- 5
- 0
- 1

Yes, the answer is correct.
Score: 1

Accepted Answers:
0

1 point
What is the output of the following code?
s = "python"
print(s[1:4])

- "pyt"

- "yth"
- "tho"
- "hon"

Yes, the answer is correct.
Score: 1

Accepted Answers:
"yth"

Week 4 : Assignment

The due date for submitting this assignment has passed.

Due on 2023-08-23, 23:59 IST.

Assignment submitted on 2023-08-16, 23:39 IST

1 point
What is a magic square?

- A square grid of letters
- A square grid of numbers where the sum of the rows, columns, & diagonals are equal
- A special kind of card trick
- A term used in cryptography

Yes, the answer is correct.
Score: 1

Accepted Answers:
A square grid of numbers where the sum of the rows, columns, & diagonals are equal

1 point
In a 3x3 magic square, what is the magic constant?

- 3
- 6
- 9
- 15

Yes, the answer is correct.
Score: 1

Accepted Answers:
15

1 point

Which of the following is NOT a property of a magic square?

- The sum of each row is equal
- The sum of each column is equal
- The sum of each diagonal is equal
- The sum of each individual element is equal

Yes, the answer is correct.
Score: 1

Accepted Answers:
The sum of each individual element is equal

0 points

What will be the output of the following code?

```
import string
import random

A = string.ascii_letters

n = int(input())

for i in range(n):
    L = []
    for j in range(n):
        L.append(random.choice(A))

    for element in L:
        print(element, end=('\t'))

    print()
```

- A magic square of size 2.
- A magic square of size n.
- A magic square of an even size.
- A magic square of an odd size.

Yes, the answer is correct.
Score: 0

Accepted Answers:
A magic square of size n.

1 point

What will be the output of the following code?

```
import random

L = []
for i in range(10):
    L.append(random.randint(0, 10))

L.sort()
L.reverse()

print(L)
```

- Sorted List(L) containing random elements between 0-10 in descending order.
- Sorted List containing random elements between 0-10 in ascending order.
- Sorted List containing elements between 0-10.
- Sorted List containing elements between 0-9 in ascending order.

No, the answer is incorrect.
Score: 0

Accepted Answers:
Sorted List(L) containing random elements between 0-10 in descending order.

1 point

Which code will generate all prime numbers between 0-100?

```
for i in range(2,101):
    flag=0
    for j in range(2, 101):
        if(i%j == 0):
            flag=1
            break
    if(flag == 0):
        print(i)
```

```
for i in range(2,101):
    flag=0
    for j in range(2, i):
        if(i%j == 0):
            flag=1
            break
    if(flag == 0):
        print(i)
```

```
for i in range(2,101):
    flag=0
    for j in range(2, i+1):
        if(i%j == 0):
            flag=1
            break
    if(flag == 0):
        print(i)
```

```
for i in range(101):
    flag=0
    for j in range(2, i):
        if(i%j == 0):
            flag=1
            break
    if(flag == 0):
        print(i)
```

No, the answer is incorrect.
Score: 0

Accepted Answers:

```python
for i in range(2,101):
    flag=0
    for j in range(2, i):
        if(i%j == 0):
            flag=1
            break
    if(flag == 0):
        print(i)
```

1 point

In the birthday paradox, as the number of people in a group increases, what happens to the probability that two people share a birthday?

- It increases
- It decreases
- It stays the same
- It becomes impossible

Yes, the answer is correct.
Score: 1

Accepted Answers:
It increases

1 point

Which module is used to generate random numbers in Python?

- math
- random
- stats
- numpy

Yes, the answer is correct.
Score: 1

Accepted Answers:
random

1 point

Which function is used to shuffle a list in Python?

- random.shuffle()
- shuffle()
- list.shuffle()
- random_list()

Yes, the answer is correct.
Score: 1

Accepted Answers:
random.shuffle()

1 point
What is the output of the following code?

```
import random


nums = [1, 2, 3, 4, 5]
random.shuffle(nums)
print(nums)
```

- [1, 2, 3, 4, 5]
- [5, 4, 3, 2, 1]
- A random ordering of the numbers 1 through 5
- An error

No, the answer is incorrect.
Score: 0

Accepted Answers:
A random ordering of the numbers 1 through 5

Week 5 : Assignment

The due date for submitting this assignment has passed.

Due on 2023-08-30, 23:59 IST.

As per our records you have not submitted this assignment.

1 point
Which is the fastest sorting algorithm?

- Bubble Sort
- Bucket Sort
- Quick Sort
- Insertion Sort

No, the answer is incorrect.
Score: 0

Accepted Answers:
Quick Sort

1 point
How can you remove all items from a dictionary?

- dict.clear()

- del dict
- dict.remove_all()
- dict.pop()

No, the answer is incorrect.
Score: 0

Accepted Answers:
dict.clear()

0 points
What happens if you try to add a new key to a dictionary that already exists?

- The key and its associated value will be updated.
- The key and its associated value will be added.
- The key will be added, but the associated value will remain unchanged.
- An error will occur.

No, the answer is incorrect.
Score: 0

Accepted Answers:
The key and its associated value will be updated.

1 point
Which of the following is true about dictionaries?

- There can be multiple same keys.
- Every value must be unique.
- Every key must be unique.
- We can’t get every key from the dictionary.

No, the answer is incorrect.
Score: 0

Accepted Answers:
Every key must be unique.

1 point
What is the syntax to create a dictionary?

- D = []
- D = {}
- D = ()
- D = dictionary()

No, the answer is incorrect.
Score: 0

Accepted Answers:
D = {}

1 point
What will be the output of the following code?

```
d = {'a': 20, 'b':30, 'c': 50}

print(d.items())
```

- ‘a’ ‘b’ ‘c’
- 20 30 50
- ('a', 20), ('b', 30), ('c', 50)
- (‘a’, ‘b’, ‘c’) (20, 30, 50)

No, the answer is incorrect.
Score: 0

Accepted Answers:
('a', 20), ('b', 30), ('c', 50)

1 point
In the Monte Hall Problem, what is the probability of winning if you switch doors after the host reveals a goat behind one of the other doors?

- 1/3
- 1/2
- 2/3
- 3/4

No, the answer is incorrect.
Score: 0

Accepted Answers:
2/3

1 point
In the Monte Hall Problem, what is the probability of winning if you do not switch doors after the host reveals a goat behind one of the other doors?

- 1/3
- 1/2
- 2/3
- 3/4

No, the answer is incorrect.
Score: 0

Accepted Answers:
1/3

1 point
What is the name of the game show that the Monte Hall Problem was based on?

- Jeopardy
- Wheel of Fortune
- The Price is Right
- Let's Make a Deal

No, the answer is incorrect.
Score: 0

Accepted Answers:
Let's Make a Deal

1 point
Which module in Python can be used for Speech to Text conversion?

- SpeechRecognition
- PyAudio
- Wave
- all of the above

No, the answer is incorrect.
Score: 0

Accepted Answers:
SpeechRecognition

Week 5: Programming Assignment 3

Due on 2023-08-31, 23:59 IST

You are given a list L. Write a program to print first prime number encountered in the list L.(Treat numbers below and equal to 1 as non prime)

Input will be handled by us.

Input
[1,2,3,4,5,6,7,8,9]

output
2

Explanation
Since 2 is the first prime number is list L, therefor it is printed.
Sample Test Cases

	Input
Test Case 1	`35 48 23 49 42 23 25 44 46 30`
Test Case 2	`138 146 143 51 117 83 106 52 144 74 52 124 71 145 59 138 123 84 112 138`

Test Case 3	-243 269 158 282 278 182 156 282 237 251 262 285 233 203 188 216 163 246 195 215 236 266 212 218 167 286
Test Case 4	70 -3 182 47 180 266 -91 -101 -75 280 -67 42 -142 -141 -82 296 -69 144 -80 116 -97 140 3 120 54 90
Test Case 5	1 2 3 4 5 6 7 8 9
Test Case 6	3 4 7 2 5 1 7 3 4 3
Test Case 7	18 7 16 3 13 11 12 17 9 9
Test Case 8	7 9 2 15 10 14 1 8 3 10

The due date for submitting this assignment has passed.
As per our records you have not submitted this assignment.

Week 6 : Assignment

The due date for submitting this assignment has passed.

Due on 2023-09-06, 23:59 IST.

As per our records you have not submitted this assignment.

1 point

What will be the output of the following code?

```
import string

def shift(word,value):

    letters = string.ascii_lowercase
    new = ''

    for i in range(len(word)):

        if word[i] in letters:

            index = letters.index(word[i])
            new = new + letters[(index+value)%26]

        else:

            new = new + word[i]

    return new
```

- Shift every letter in a given word by value.
- Shift every letter in a given word by 1.
- Shift every letter in a given word by 26.
- Returns the same word.

No, the answer is incorrect.
Score: 0

Accepted Answers:
Shift every letter in a given word by value.

1 point
In the list L = [4,6,7,4,6,2,1], What is the index of element '7'?

- 0
- 1
- 2
- 3

No, the answer is incorrect.
Score: 0

Accepted Answers:
2

1 point
Which of the following is true about recursion?

- [ ] Recursion always performs better than non-recursive code.
- [ ] Recursive code is easier to debug.
- [ ] The base case is necessary for recursion.
- [ ] Recursive code can be shorter than non-recursive code

No, the answer is incorrect.
Score: 0

Accepted Answers:
Recursive code is easier to debug.
The base case is necessary for recursion.
Recursive code can be shorter than non-recursive code

0 points
What will be the output of the following program?

```
def recursive(num):

    if(num == 1):
        return 1

    return num*(num-1)
```

- ( ) Calculating sum of first n terms.
- ( ) Calculating product of first n terms.
- ( ) Calculating power of first n terms.
- ( ) Calculating sum of last n terms.

No, the answer is incorrect.
Score: 0

Accepted Answers:
Calculating product of first n terms.

1 point
In Caesar cipher,the mediator needs to make maximum of how many trails to break the code?

- ( ) 1
- ( ) 26
- ( ) no trail needed
- ( ) 10

No, the answer is incorrect.
Score: 0

Accepted Answers:
26

0 points
What is the output of the following program?

```
def recursive(L):

    return L[-1] * recursive(L[:-1])

print(recursive([1,2,3,4,5,6,7,8,9,10]))
```

- 3628800
- Runs into an infinite loop
- 55
- Syntax error

No, the answer is incorrect.
Score: 0

Accepted Answers:
Runs into an infinite loop

0 points
What's the correct code for Binary search?

```
def Binary(L,find, start, end):

    mid = int((start+end)/2)

    if(start < end):
        if(L[end] == find):
            return end
        else:
            return -100


    if(L[mid] == find):
        return mid

    elif(find > L[mid]):
        return Binary(L, find, mid + 1, end)

    else:
        return Binary(L, find, start, mid-1)
```

```python
def Binary(L,find, start, end):

    mid = int((start+end)/2)

    if(start == end):
        if(L[end] == find):
            return end
        else:
            return -100


    if(L[mid] == find):
        return mid

    elif(find > L[mid]):
        return Binary(L, find, start, mid - 1)

    else:
        return Binary(L, find, mid + 1, end)
```

```python
def Binary(L,find, start, end):

    mid = int((start+end)/2)

    if(start == end):
        if(L[end] == find):
            return end
        else:
            return -100


    if(L[mid] == find):
        return mid

    elif(find > L[mid]):
        return Binary(L, find, mid + 1, end)

    else:
        return Binary(L, find, start, mid-1)
```

```python
def Binary(L,find, start, end):

    mid = int((start+end)/2)

    if(start >= end):
        if(L[end] == find):
            return end
        else:
            return -100


    if(L[mid] != find):
        return mid

    elif(find > L[mid]):
        return Binary(L, find, mid + 1, end)

    else:
        return Binary(L, find, start, mid-1)
```

No, the answer is incorrect.

Score: 0

Accepted Answers:

```python
def Binary(L,find, start, end):

    mid = int((start+end)/2)

    if(start == end):
        if(L[end] == find):
            return end
        else:
            return -100


    if(L[mid] == find):
        return mid

    elif(find > L[mid]):
        return Binary(L, find, mid + 1, end)

    else:
        return Binary(L, find, start, mid-1)
```

1 point

Which of the following is TRUE about MIN-MAX strategy?

- Maximize the chances of your winning and minimize the changes of the opponent winning
- The game with min-max strategy can never be drawn
- Minimize the chances of your winning and maximize the chances of the opponent winning
- All the above are true

No, the answer is incorrect.
Score: 0

Accepted Answers:
Maximize the chances of your winning and minimize the changes of the opponent winning

1 point

A program that is written recursively cannot be written in a non-recursive manner.

- True
- False

No, the answer is incorrect.
Score: 0

Accepted Answers:
False

1 point

what will be the output of the following program?

```
def recursive(num):

    if(num==1):
        print('*')
        return

    if(num%2 == 0):
        print('*'*num)
        recursive(num-1)
        return
    else:
        recursive(num-1)
        return

recursive(10)
```

-
```
**********
*********
********
*******
******
```

*****
****
***
**
*

****
****
*****
***
*

Runs into infinite loop

****
****
******
****
**
*

No, the answer is incorrect.
Score: 0

Accepted Answers:
****
****
******
****
**
*

Week 6: Programming Assignment 3

Due on 2023-09-07, 23:59 IST

write a function whole(N) which takes a number N and return the sum of first N whole number. Write the program using recursion.

Input
N

Output
sum of whole numbers till N

Example:

Input
3

Output
6

Explanation
Sum of first 3 natural numbers are 0+1+2+3 = 6
Sample Test Cases

	Input	Output
Test Case 1	20	210
Test Case 2	1	1
Test Case 3	30	465
Test Case 4	0	0
Test Case 5	3	6
Test Case 6	5	15
Test Case 7	10	55
Test Case 8	12	78

The due date for submitting this assignment has passed.
As per our records you have not submitted this assignment.

Week 6: Programming Assignment 2

Due on 2023-09-07, 23:59 IST

Romeo and Juliet love each other. Romeo wants to send a message to Juliet and also don't want anyone to read it without his permission. So he shifted every small letter in the sentence by -2 position and every capital letter by -3 position. (If the letter is c, after shifting to by -2 position it changes to a, and for D new letter will be A).
But the letter is too long and Romeo does not have enough time to encrypt his whole letter. Write a program to help Romeo which prints the encrypted message. You can assume there are no special characters except spaces and numeric value.

Input
A string S

Output
Encrypted string

Example

Input

Hello Juliet

Output
Ecjjm Gsjgcr

Explanation
H is shifted by -3 position and changed to E. 'e' is shifted by -2 position and changed to c and so on.

Sample Test Cases

	Input	Output
Test Case 1	dbawoidbqwdhuiwahd uwadhfwaiudhwhd	bzyumgbzoubfsguyfb suybfduygsbfu
Test Case 2	foiqhfwuefhuewh gfuiwegr QZHQE3AN ihidhqwiuUFGQU	dmgofduscdfscuf edsgucep NWENB3X
Test Case 3	fiewuhfiwsb HBFIOSEGHFWOSIbfvwui BIOEWHBF ZBCDNPQOE VHUFAPQUIEb	dgcusfdguqz EYCFLPBDECTLPFzdtusg SERCXMNRFBz
Test Case 4	ufiqwgfqwhfcbqw vuqhfPVRuyfVBUFGFGEBVEWUGF WFGVWUGVSD	sdgouedoufdazou tsofdMSOswdSYRCD
Test Case 5	Hello Juliet	Ecjjm Gsjgcr
Test Case 6	Lets meet tonight	Icrq kccr rmlgefr
Test Case 7	How are you	Emu ypc wms
Test Case 8	When will you return	Tfcl ugjj wms pcrspl

The due date for submitting this assignment has passed.
As per our records you have not submitted this assignment.
Sample solutions (Provided by instructor)

```
S = input()

import string



low = string.ascii_lowercase

cap = string.ascii_uppercase
```

```
ans =''

for i in S:
    if i in low:
        index =low.index(i)
        #1-2 =-1+26 =25
        index = ((index-2)+26)%26
        ans+=low[index]
    elif i in cap:
        index =cap.index(i)
        #1-2 =-1+26 =25
        index = ((index-3)+26)%26
        ans+=cap[index]
    else:
        ans+=i


print(ans)
```

Week 6: Programming Assignment 1

Due on 2023-09-07, 23:59 IST

Aman likes to study about planets. Every night he goes outside and observe some planets with his telescope. Then he guesses the distance of each planet and pen it down. In this process he also pen down his favourite planet position. Given the distance of each planet to be unique you need to return position of Aman's favourite planet after sorting all the distances.

Input:

N (No of planets)

L (List of distances of planet)
K (position of Aman's favourite planet in unsorted list)

Output:

Position of Aman's favourite planet in sorted List.

Example:

Input
5
[4,5,3,2,1]
2

Output
5

Explanation:

The position of aman's favourite planet in unsorted list is 2 and list of distances of planets at position 2 the distance is 5. After sorting the list [1,2,3,4,5] the position of aman's favourite is changed to 5.

Note: Index is different from position. Indexing of the list starts from 0 whereas positioning in the list start form 1.

Sample Test Cases

	Input
Test Case 1	15 259 122 182 155 161 293 281 125 1 47 273 121 258 264 290 11
Test Case 2	20 201 246 101 199 84 168 312 410 212 295 260 300 64 312 263 303 398 33 359 399 13

Test Case 3	20 15 34 453 180 78 282 319 59 124 7 195 178 346 41 488 92 270 478 79 378 14
Test Case 4	20 304 43 366 331 425 31 32 45 90 418 137 109 457 351 311 149 8 386 155 120 7
Test Case 5	5 4 5 3 2 1 2
Test Case 6	10 119 124 91 30 12 21 31 180 175 116 10
Test Case 7	10 121 136 187 137 195 49 46 118 152 73 5
Test Case 8	15 53 141 69 54 175 3 111 57 14 179 129 199 88 196 188 2

The due date for submitting this assignment has passed.

As per our records you have not submitted this assignment.