



Business Science

Learn the data science skills to **accelerate your career** in 6-months or less.


www.business-science.io

Shares

Chapter 15 Git Command Line Interface (CLI)

15.1 Git Command Workflow

Git Workflow & Commands

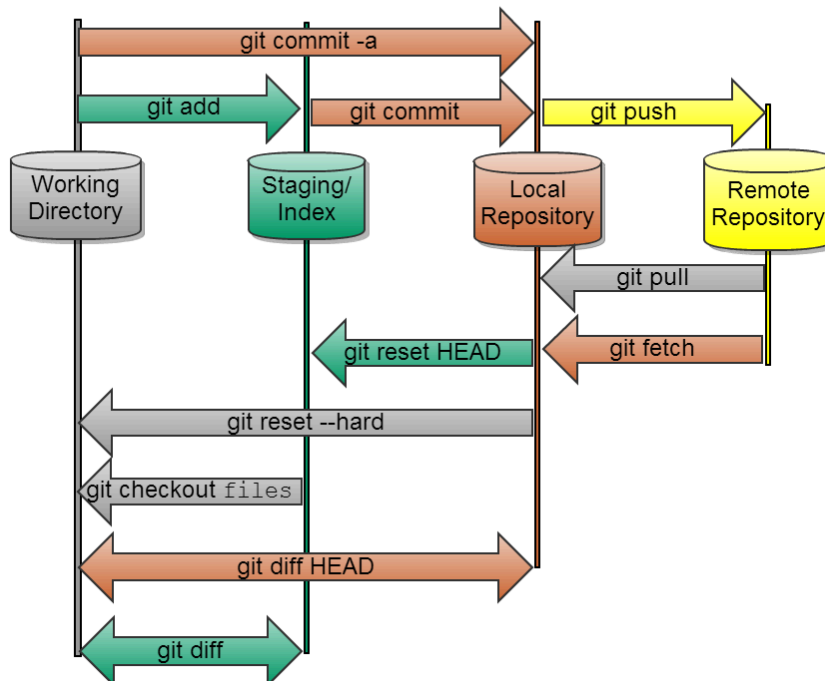

15.2 Git Commands


These are the primary commands for working with `git` from the commandline.

Important Note - We will use RStudio IDE to abstract away much of the `git` workflow. RStudio is integrated tightly with `git` and GitHub, which is a massive productivity booster.

15.2.1 General Commands

Shares

- `git --help` - Use help to investigate the available commands.
- `git --version` - Useful for getting the version and checking `git` installation.

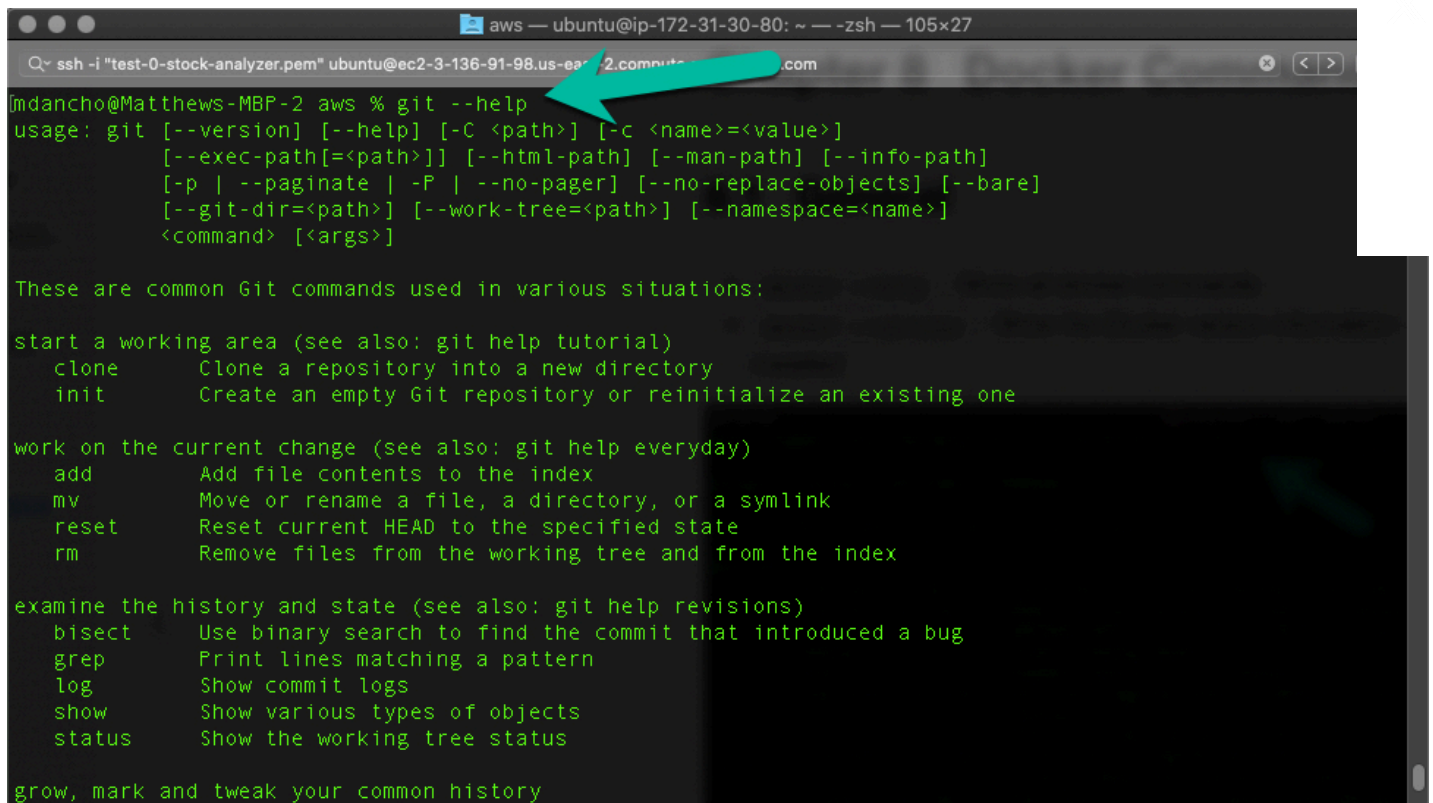

```
aws — ubuntu@ip-172-31-30-80: ~ — zsh — 105x27
ssh -i "test-0-stock-analyzer.pem" ubuntu@ec2-3-136-91-98.us-east-2.compute.amazonaws.com
[mdancho@Matthews-MBP-2 aws % git --help
usage: git [--version] [--help] [-C <path>] [-c <name>=<value>]
      [--exec-path=<path>] [--html-path] [--man-path] [--info-path]
      [-p | --paginate | -P | --no-pager] [--no-replace-objects] [--bare]
      [--git-dir=<path>] [--work-tree=<path>] [--namespace=<name>]
      <command> [<args>]

These are common Git commands used in various situations:

start a working area (see also: git help tutorial)
  clone      Clone a repository into a new directory
  init       Create an empty Git repository or reinitialize an existing one

work on the current change (see also: git help everyday)
  add        Add file contents to the index
  mv         Move or rename a file, a directory, or a symlink
  reset      Reset current HEAD to the specified state
  rm         Remove files from the working tree and from the index

examine the history and state (see also: git help revisions)
  bisect     Use binary search to find the commit that introduced a bug
  grep       Print lines matching a pattern
  log        Show commit logs
  show       Show various types of objects
  status     Show the working tree status

grow, mark and tweak your common history
```

15.2.2 Local Repo Setup

No Remote Repo set up?

- `git init` - Initialize a Local Repo
- `git commit` - Done to initialize (add) your files to the Local Repo.

Remote Repo already set up?

- `git clone` - Clones a remote repo to your local machine. We do this to get software onto EC2 Servers.

Shares

15.2.3 GitHub Repo Setup

Important: Make sure a blank repo exists. Then:

- `git remote add origin https://github.com/user_name/repository.git` - Used to link a local repository with a
- `git push -u origin master` - Pushes your initial commit on your Local Repo to the Remote Repo (e.g. GitHub).

Shares

15.2.4 Git Workflow

- `git commit` - Adds snapshots of changed files to your Local Repo.
- `git push` - Pushes committed files from your Local Repo to your Remote Repo (e.g. GitHub)
- `git pull` - Pulls the remote repository files to your local repository

15.2.5 Branches

- `git status` - Find the branch you are currently on
- `git branch` - Creates a new branch
- `git checkout` switches the Local Repository to the specified branch
- `git merge` - Merges a branch with the master. This is typically done via “Pull Requests”.