



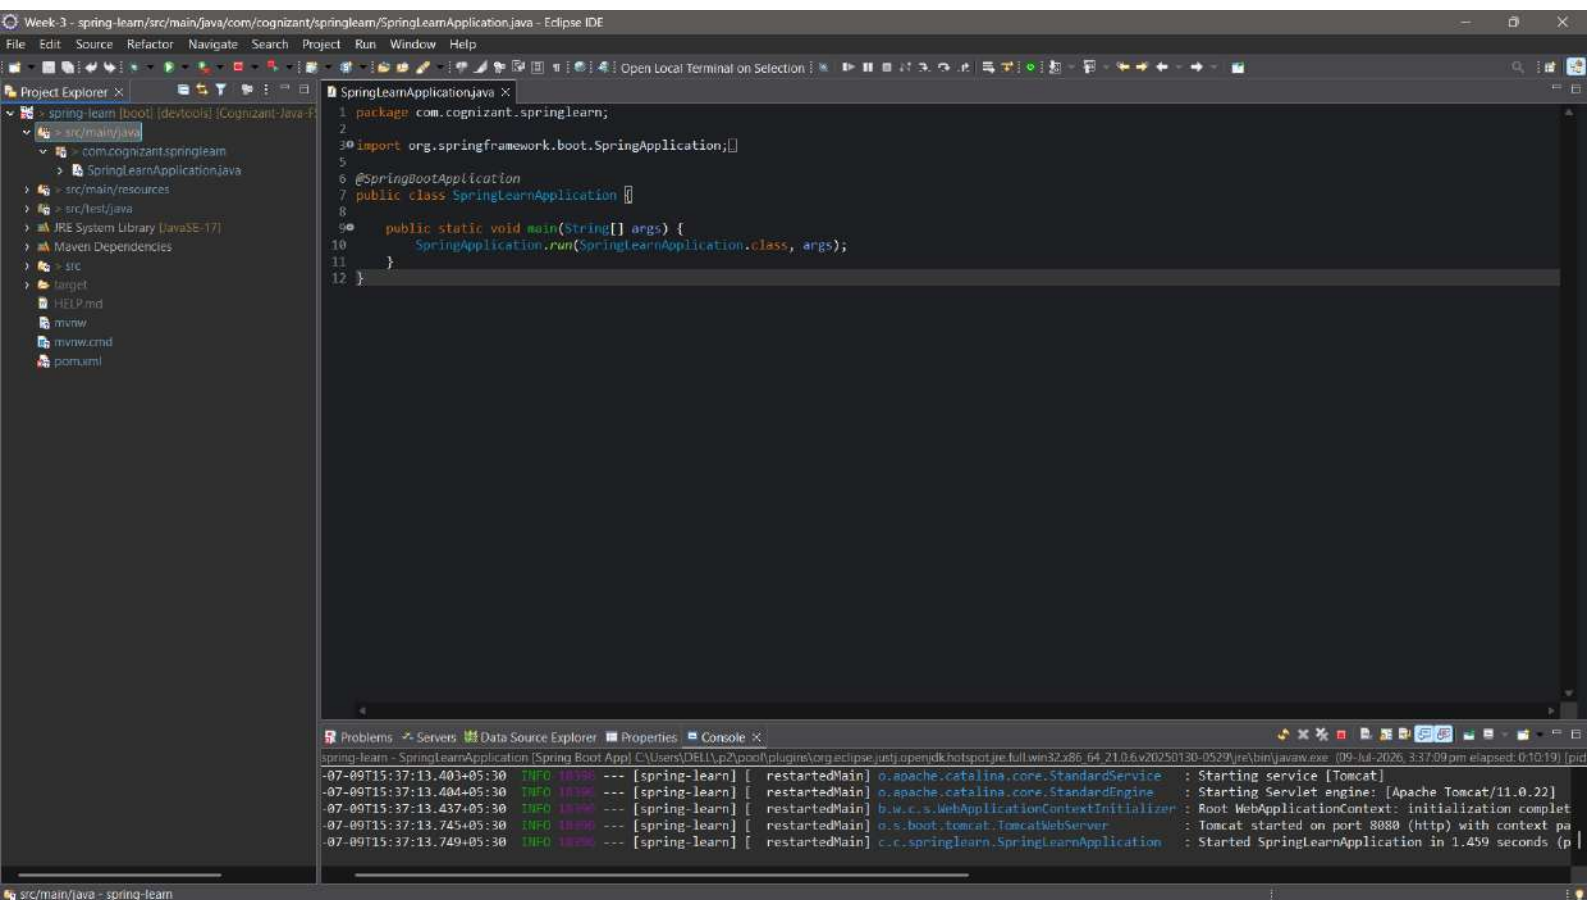

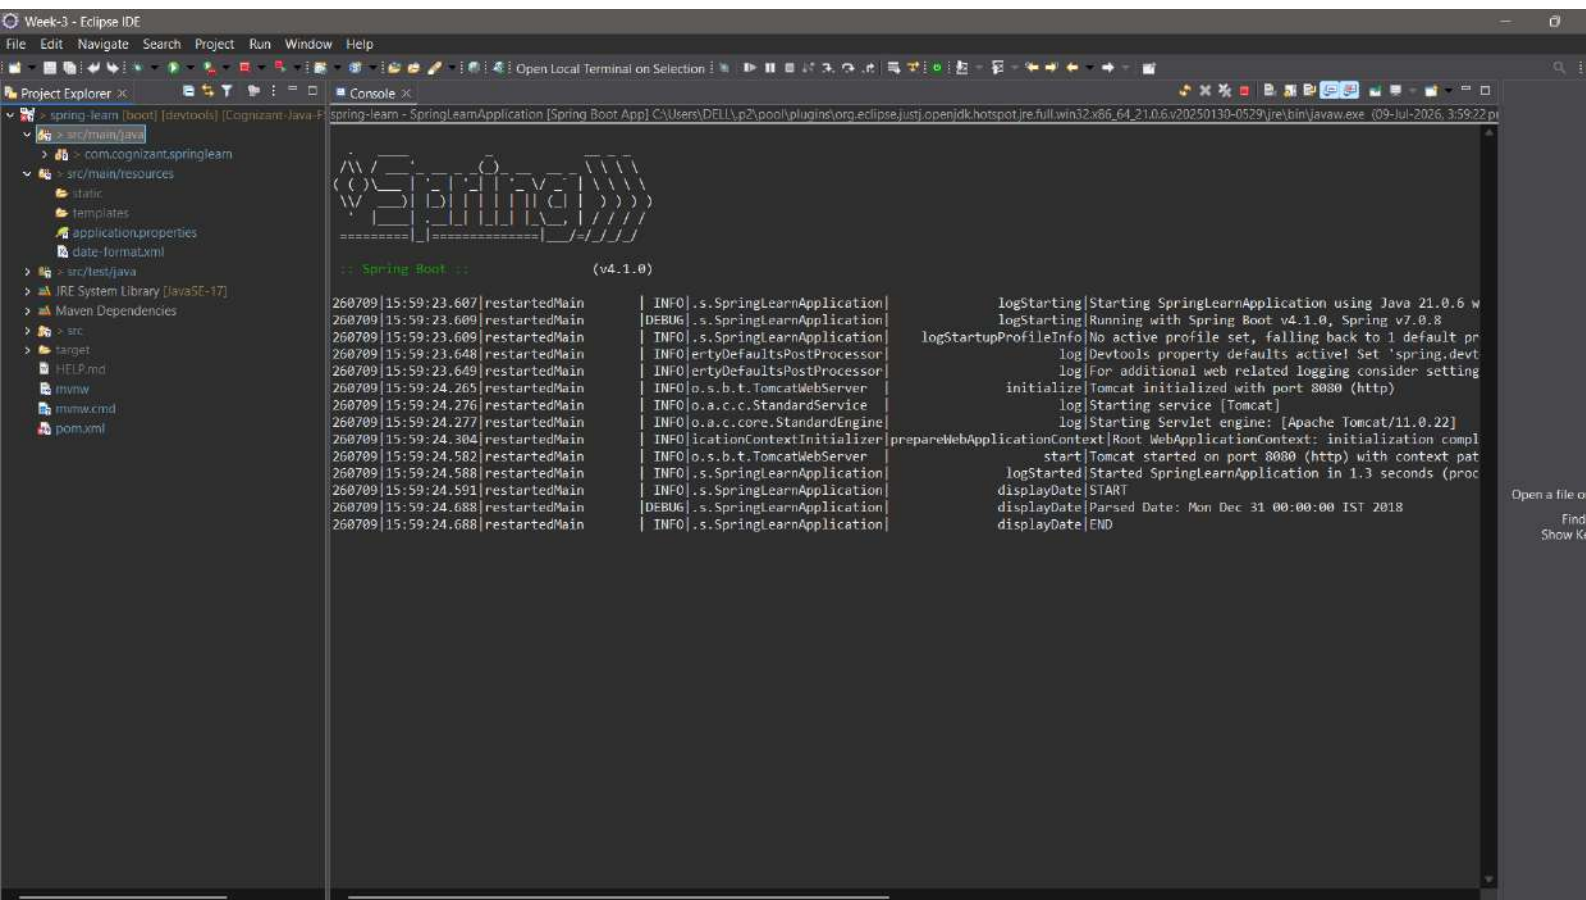

Week 3 - Eclipse IDE

File Edit Navigate Search Project Run Window Help

Project Explorer

Console

spring-learn - SpringLearnApplication [Spring Boot App] C:\Users\DELL\p2\pool\plugins\org.eclipse.just\openjdk.hotspot.jre.full.win32.x86_64_21.0.6.v20250130-0529\jre\bin\java.exe (09-Jul-2026, 4:03:23 pm elapsed: 0:01:16) [pid: 46468]

src/main/java/com/cognizant/Country.java

src/main/resources/static/templates/application.properties

src/test/java/date-format.xml

src/Maven Dependencies

src/target

src/mvnw.cmd

src/pom.xml

Spring Boot :: (v4.1.0)

260709|16:03:26.441|restartedMain|INFO|.s.SpringLearnApplication|logStarting|Starting SpringLearnApplication using Java 21.0.6 with PID 46468 (D:\C:\Users\DELL\p2\pool\plugins\org.eclipse.just\openjdk.hotspot.jre.full.win32.x86_64_21.0.6.v20250130-0529\jre\bin\java.exe)

260709|16:03:26.443|restartedMain|DEBUG|.s.SpringLearnApplication|logStarting|Running with Spring Boot v4.1.0, Spring v7.0.8

260709|16:03:26.444|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|No active profile set, falling back to 1 default profile: "default"

260709|16:03:26.481|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|logStartupProfileInfo: No active profile set, falling back to 1 default profile: "default"

260709|16:03:26.482|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|logStartupProfileInfo: No active profile set, falling back to 1 default profile: "default"

260709|16:03:26.482|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|logStartupProfileInfo: No active profile set, falling back to 1 default profile: "default"

260709|16:03:27.133|restartedMain|INFO|.s.b.t.TomcatWebServer|initialize|Tomcat initialized with port 8080 (http)

260709|16:03:27.145|restartedMain|INFO|.o.a.c.c.StandardService|log|Starting service [Tomcat]

260709|16:03:27.145|restartedMain|INFO|.o.a.c.c.StandardService|log|Starting Servlet engine: [Apache Tomcat/11.0.22]

260709|16:03:27.178|restartedMain|INFO|.s.b.t.TomcatWebServer|prepareWebApplicationContext|Root WebApplicationContext: initialization completed in 696 ms

260709|16:03:27.457|restartedMain|INFO|.s.b.t.TomcatWebServer|start|Tomcat started on port 8080 (http) with context path '/'

260709|16:03:27.461|restartedMain|INFO|.s.SpringLearnApplication|logStarted|Started SpringLearnApplication in 1.332 seconds (process running for 1)

260709|16:03:27.466|restartedMain|INFO|.s.SpringLearnApplication|displayDate|START

260709|16:03:27.567|restartedMain|DEBUG|.s.SpringLearnApplication|displayDate|Parsed Date: Mon Dec 31 00:00:00 IST 2018

260709|16:03:27.567|restartedMain|DEBUG|.s.SpringLearnApplication|displayDate|END

260709|16:03:27.567|restartedMain|INFO|.s.SpringLearnApplication|displayCountry|START

260709|16:03:27.581|restartedMain|DEBUG|.c.c.springlearn.Country|<init>|Inside Country Constructor.

260709|16:03:27.582|restartedMain|DEBUG|.c.c.springlearn.Country|setCode|Inside setCode()

260709|16:03:27.582|restartedMain|DEBUG|.c.c.springlearn.Country|setName|Inside setName()

260709|16:03:27.583|restartedMain|DEBUG|.s.SpringLearnApplication|displayCountry|Country : Country [code=IN, name=India]

260709|16:03:27.583|restartedMain|INFO|.s.SpringLearnApplication|displayCountry|END

Open a file or drop file here

Find Actions (F3)
Show Key Assist (F1)
New (Ctrl+N)

Week-3 - Eclipse IDE

File Edit Navigate Search Project Run Window Help

Project Explorer

- spring-learn (boot) [devtools] (C:\Users\DELL\p2\pool\plugins\org.eclipse.justi.openjdk.hotspot.jre.full.win32.x86_64_21.0.6.v20250130-0529\jre\bin\java.exe (09-Jul-2026, 4:12:48 pm elapsed: 0:00)
- src/main/java
 - com.cognizant.springlearn
 - Country.java
 - SpringLearnApplication.java
- src/main/resources
 - static
 - templates
 - application.properties
 - country.xml
 - date-format.xml
- src/test/java
- JRE System Library [JavaSE-17]
- Maven Dependencies
- src
 - main
 - java
 - resources
 - static
 - templates
 - application.properties
 - country.xml
 - date-format.xml
 - test
- target
- HELP.md
- mvnw
- mvnw.cmd
- pom.xml

Console

spring-learn - SpringLearnApplication [Spring Boot App] C:\Users\DELL\p2\pool\plugins\org.eclipse.justi.openjdk.hotspot.jre.full.win32.x86_64_21.0.6.v20250130-0529\jre\bin\java.exe (09-Jul-2026, 4:12:48 pm elapsed: 0:00)

```

=====
:: Spring Boot ::
(v4.1.0)

260709|16:12:49.483|restartedMain|INFO|.s.SpringLearnApplication|logStarting|Starting SpringLearnApplication using Java 21.0.6 with PID 911
260709|16:12:49.485|restartedMain|DEBUG|.s.SpringLearnApplication|logStarting|Running with Spring Boot v4.1.0, Spring v7.0.8
260709|16:12:49.485|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|No active profile set, falling back to 1 default profile: "def
260709|16:12:49.524|restartedMain|INFO|ertyDefaultsPostProcessor|log|Devtools property defaults active! Set 'spring.devtools.add-pr
260709|16:12:49.524|restartedMain|INFO|ertyDefaultsPostProcessor|log|For additional web related logging consider setting the 'loggi
260709|16:12:50.217|restartedMain|INFO|o.s.b.t.TomcatWebServer|initialize|Tomcat initialized with port 8080 (http)
260709|16:12:50.227|restartedMain|INFO|o.a.c.c.StandardService|log|Starting service [Tomcat]
260709|16:12:50.228|restartedMain|INFO|o.a.c.c.StandardEngine|log|Starting Servlet engine: [Apache Tomcat/11.0.22]
260709|16:12:50.251|restartedMain|INFO|icationContextInitializer|prepareWebApplicationContext|Root WebApplicationContext: initialization completed in 726
260709|16:12:50.505|restartedMain|INFO|o.s.b.t.TomcatWebServer|start|Tomcat started on port 8080 (http) with context path '/'
260709|16:12:50.509|restartedMain|INFO|.s.SpringLearnApplication|logStarted|Started SpringLearnApplication in 1.352 seconds (process runni
260709|16:12:50.513|restartedMain|INFO|.s.SpringLearnApplication|displayDate|START
260709|16:12:50.608|restartedMain|DEBUG|.s.SpringLearnApplication|displayDate|Parsed Date: Mon Dec 31 00:00:00 IST 2018
260709|16:12:50.608|restartedMain|INFO|.s.SpringLearnApplication|displayDate|END
260709|16:12:50.608|restartedMain|INFO|.s.SpringLearnApplication|displayCountry|START
260709|16:12:50.618|restartedMain|DEBUG|c.c.springlearn.Country|<init>|Inside Country Constructor.
260709|16:12:50.619|restartedMain|DEBUG|c.c.springlearn.Country|setCode|Inside setCode()
260709|16:12:50.619|restartedMain|DEBUG|c.c.springlearn.Country|setName|Inside setName()
260709|16:12:50.619|restartedMain|DEBUG|.s.SpringLearnApplication|displayCountry|Country 1 : Country [code=IN, name=India]
260709|16:12:50.620|restartedMain|DEBUG|.s.SpringLearnApplication|displayCountry|Country 2 : Country [code=IN, name=India]
260709|16:12:50.620|restartedMain|INFO|.s.SpringLearnApplication|displayCountry|END
```


Week 3 - spring-learn/src/main/resources/country.xml - Eclipse IDE

File Edit Navigate Search Project Run Window Help

Project Explorer

- spring-learn [boot] [devtools] [Cognizant-Java]
- src/main/java
 - com.cognizant.springlearn
 - Country.java
 - SpringLearnApplication.java
 - SpringLearnApplication
 - src/main/resources
 - static
 - templates
 - application.properties
 - country.xml
 - date-format.xml
 - src/test/java
 - JRE System Library [JavaSE-17]
 - Maven Dependencies
 - src
 - main
 - java
 - resources
 - static
 - templates
 - application.properties
 - country.xml
 - date-format.xml
 - test
 - target
 - HELP.md
 - mvnw
 - mvnw.cmd
 - pom.xml


Console

Spring-learn - SpringLearnApplication [Spring Boot App] C:\Users\DELL\p2\plugins\org.eclipse.justi.openjdk.hotspot.jre.full.win32.x86_64_21.0.6.v20230130-0529\jre\bin\javaw.exe (09-Jul-2026, 4:24:43 pm)

```
=====
:: Spring Boot ::      (v4.1.0)

260709|16:24:47.169|restartedMain|INFO|.s.SpringLearnApplication|logStarting|Starting SpringLearnApplication using Java 21.0.6 wi
260709|16:24:47.172|restartedMain|DEBUG|.s.SpringLearnApplication|logStarting|Running with Spring Boot v4.1.0, Spring v7.0.8
260709|16:24:47.173|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|No active profile set, falling back to 1 default pro
260709|16:24:47.213|restartedMain|INFO|.s.SpringLearnApplication|ertyDefaultsPostProcessor|log|Devtools property defaults active! Set 'spring.devto
260709|16:24:47.213|restartedMain|INFO|.s.SpringLearnApplication|ertyDefaultsPostProcessor|log|For additional web related logging consider setting
260709|16:24:47.803|restartedMain|INFO|.o.s.b.t.TomcatWebServer|initialize|Tomcat initialized with port 8080 (http)
260709|16:24:47.816|restartedMain|INFO|.o.a.c.c.StandardService|log|Starting service [Tomcat]
260709|16:24:47.817|restartedMain|INFO|.o.a.c.c.StandardEngine|log|Starting Servlet engine: [Apache Tomcat/11.0.22]
260709|16:24:47.842|restartedMain|INFO|.o.s.b.t.TomcatWebServer|licationContextInitializer|prepareWebApplicationContext|Root WebApplicationContext: initialization comple
260709|16:24:48.131|restartedMain|INFO|.o.s.b.t.TomcatWebServer|start|Tomcat started on port 8080 (http) with context path
260709|16:24:48.137|restartedMain|INFO|.s.SpringLearnApplication|logStarted|Started SpringLearnApplication in 1.284 seconds (pro
260709|16:24:48.141|restartedMain|INFO|.s.SpringLearnApplication|displayDate|START
260709|16:24:48.251|restartedMain|DEBUG|.s.SpringLearnApplication|displayDate|Parsed Date: Mon Dec 31 00:00:00 IST 2018
260709|16:24:48.251|restartedMain|INFO|.s.SpringLearnApplication|displayDate|END
260709|16:24:48.251|restartedMain|INFO|.s.SpringLearnApplication|displayCountries|START
260709|16:24:48.269|restartedMain|DEBUG|.c.c.SpringLearn.Country|<init>|Inside Country Constructor.
260709|16:24:48.270|restartedMain|DEBUG|.c.c.SpringLearn.Country|setCode|Inside setCode()
260709|16:24:48.270|restartedMain|DEBUG|.c.c.SpringLearn.Country|setName|Inside setName()
260709|16:24:48.270|restartedMain|DEBUG|.c.c.SpringLearn.Country|<init>|Inside Country Constructor.
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|setCode|Inside setCode()
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|setName|Inside setName()
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|<init>|Inside Country Constructor.
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|setCode|Inside setCode()
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|setName|Inside setName()
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|<init>|Inside Country Constructor.
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|setCode|Inside setCode()
260709|16:24:48.271|restartedMain|DEBUG|.c.c.SpringLearn.Country|setName|Inside setName()
260709|16:24:48.276|restartedMain|DEBUG|.s.SpringLearnApplication|displayCountries|Country [code-IN, name-India]
260709|16:24:48.276|restartedMain|DEBUG|.s.SpringLearnApplication|displayCountries|Country [code-US, name-United States]
260709|16:24:48.276|restartedMain|DEBUG|.s.SpringLearnApplication|displayCountries|Country [code-DE, name-Germany]
260709|16:24:48.276|restartedMain|DEBUG|.s.SpringLearnApplication|displayCountries|Country [code-JP, name-Japan]
260709|16:24:48.276|restartedMain|INFO|.s.SpringLearnApplication|displayCountries|END
```

https://www...
1 <?xml ver=...
2
3 <beans xm=...
4 <bean...
5 <xs:...
6 <htl...
7 <htl...
8
9 <!-- ...
10 <bean...
11 <!-- ...
12 <!-- ...
13 </bean...
14 <!-- ...
15 <!-- ...
16 <bean...
17 <!-- ...
18 <!-- ...
19 </bean...
20
21 <!-- ...
22 <bean...
23 <!-- ...
24 <!-- ...
25 </bean...
26
27 <!-- ...
28 <bean...
29 <!-- ...
30 <!-- ...
31 </bean...
32
33 <!-- ...
34 <bean...
35 <!-- ...
36
37
38
39
40
41
42
43 </bean...
44
45 </beans>

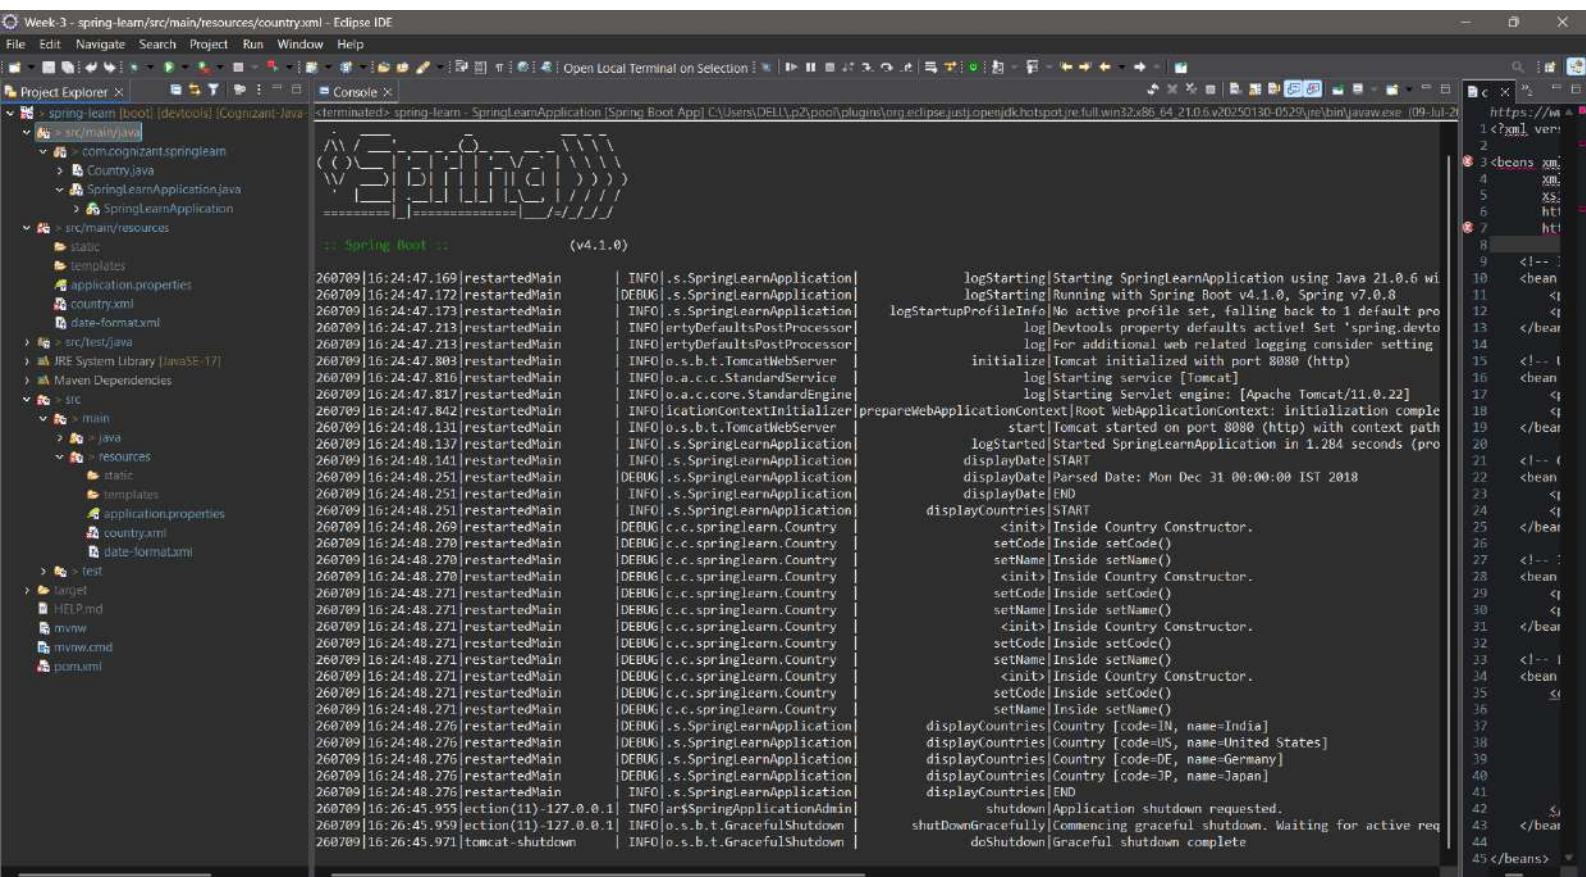

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWES

GET New Request

+

GET

http://localhost:8083/country

Send

Save

Share

Docs

Params

Authorization

Headers

Body

Scripts

Settings

Cookies

Body

Cookies

Headers

Test Results

200 OK

301 ms

184 B

Save Response

JSON

Preview

Visualize

1 {

2 |

3 | "code": "IN",

4 | "name": "India"

5 }

Debugging Invalid Proto...

/debug-request

What's wrong with this request? I'm getting this error: Error: Invalid protocol: get http:

GET New Request

The error "Invalid protocol: get http:" is a classic URL formatting issue. Here's what's happening:

Root cause: The request URL is set to GET http://localhost:8083/country — the HTTP method GET has been accidentally typed into the URL field itself, making the full string get http://localhost:8083/country. Postman is trying to parse get: http: as the protocol, which is invalid.

The fix: Remove GET (and the space after it) from the URL field so it reads only:

http://localhost:8083/country

The HTTP method is already set separately via the method dropdown (GET) to the left of the URL bar — it should not appear in the URL field itself.

Waiting for approval...

Describe what you need. Press @ for context, / for Skills.

Auto

Connect Git

Console

Terminal

0

0

Globals

Vault

Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

GET New Request

GET

http://localhost:8083/countries

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Body

{ } JSON

Preview Visualize

```
1 {
2   {
3     "code": "IN",
4     "name": "India"
5   },
6   {
7     "code": "US",
8     "name": "United States"
9   },
10  {
11    "code": "DE",
12    "name": "Germany"
13  },
14  {
15    "code": "JP",
16    "name": "Japan"
17  }
18 }
```

200 OK · 315 ms · 284 B · Save Response

Debugging Invalid Proto...

/debug-request

What's wrong with this request? I'm getting this error: Error: Invalid protocol: get http: GET New Request

The error "invalid protocol: get http:" is a classic URL formatting issue. Here's what's happening:

Root cause: The request URL is set to GET http://localhost:8083/country — the HTTP method GET has been accidentally typed into the URL field itself, making the full string get http://localhost:8083/country. Postman is trying to parse get http: as the protocol, which is invalid.

The fix: Remove GET (and the space after it) from the URL field so it reads only:

http://localhost:8083/country

The HTTP method is already set separately via the method dropdown (GET) to the left of the URL bar — it should not appear in the URL field itself.

Waiting for approval...

Describe what you need. Press @ for context, / for Skills.

Auto

Connect Git

Console

Terminal

0 0 0

Globals Vault Tools

My Workspace

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWES

GET New Request

GET

http://localhost:8083/countries/IN

Send

Docs

Params

Authorization

Headers

Body

Scripts

Settings

Body

Cookies

Headers

Test Results

200 OK

93 ms

184 B

Save Response

JSON

Preview

Visualize

1

{

2

"code": "IN",

3

"name": "India"

4

}

Debugging Invalid Proto...

/debug-request

What's wrong with this request? I'm getting this error: Error: Invalid protocol: get http:

GET New Request

The error "Invalid protocol: get http:" is a classic URL formatting issue. Here's what's happening:

Root cause: The request URL is set to GET http://localhost:8083/country — the HTTP method GET has been accidentally typed into the URL field itself, making the full string get http://localhost:8083/country. Postman is trying to parse get http: as the protocol, which is invalid.

The fix: Remove GET (and the space after it) from the URL field so it reads only:

http://localhost:8083/country

The HTTP method is already set separately via the method dropdown (GET) to the left of the URL bar — it should not appear in the URL field itself.

Waiting for approval...

Describe what you need. Press @ for context, / for Skills.

Auto

Connect Git

Console

Terminal

0

0

Globals

Vault

Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

GET New Request

http://localhost:8083/countries/XYZ

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Body Cookies Headers 5 Test Results

JSON Preview Debug with AI

1 {

2 "timestamp": "2026-07-09T11:47:19.677Z",

3 "status": 404,

4 "error": "Not Found",

5 "trace": "com.cognizant.springlearn.service.exception.CountryNotFoundException\r\n\tat com.cognizant.springlearn.service.CountryService.getCountry(CountryService.java:39)\r\n\tat com.cognizant.springlearn.controller.CountryController.getCountry(CountryController.java:66)\r\n\tat java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:189)\r\n\tat java.base/java.lang.reflect.Method.invoke(Method.java:580)\r\n\tat org.springframework.web.method.support.InvocableHandlerMethod.doInvoke(InvocableHandlerMethod.java:252)\r\n\tat org.springframework.web.method.support.InvocableHandlerMethod.invokeForRequest(InvocableHandlerMethod.java:184)\r\n\tat org.springframework.web.servlet.mvc.method.annotation.ServletInvocableHandlerMethod.invokeAndHandle(ServletInvocableHandlerMethod.java:117)\r\n\tat org.springframework.web.servlet.mvc.method.annotation.RequestMappingHandlerAdapter.invokeHandlerMethod(RequestMappingHandlerAdapter.java:934)\r\n\tat org.springframework.web.servlet.mvc.method.annotation.RequestMappingHandlerAdapter.handleInternal(RequestMappingHandlerAdapter.java:883)\r\n\tat org.springframework.web.servlet.mvc.method.AbstractHandlerMethodAdapter.handle(AbstractHandlerMethodAdapter.java:86)\r\n\tat org.springframework.web.servlet.DispatcherServlet.doDispatch(DispatcherServlet.java:963)\r\n\tat org.springframework.web.servlet.DispatcherServlet.doService(DispatcherServlet.java:866)\r\n\tat org.springframework.web.servlet.FrameworkServlet.processRequest(FrameworkServlet.java:1090)\r\n\tat org.springframework.web.servlet.FrameworkServlet.doGet(FrameworkServlet.java:892)\r\n\tat jakarta.servlet.http.HttpServlet.service(HttpServlet.java:622)\r\n\tat org.springframework.web.servlet.FrameworkServlet.service(FrameworkServlet.java:874)\r\n\tat jakarta.servlet.http.HttpServlet.service(HttpServlet.java:710)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:128)\r\n\tat org.apache.tomcat.websocket.server.WsFilter.doFilter(WsFilter.java:53)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:187)\r\n\tat org.springframework.web.filter.RequestContextFilter.doFilterInternal(RequestContextFilter.java:190)\r\n\tat org.springframework.web.filter.OncePerRequestFilter.doFilter(OncePerRequestFilter.java:116)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:187)\r\n\tat org.springframework.web.filter.FormContentFilter.doFilterInternal(FormContentFilter.java:93)\r\n\tat org.springframework.web.filter.OncePerRequestFilter.doFilter(OncePerRequestFilter.java:116)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:187)\r\n\tat

404 Not Found

847 ms

4.66 KB

Save Response

Body Cookies Headers 5 Test Results

JSON Preview Debug with AI

1 {

2 "timestamp": "2026-07-09T11:47:19.677Z",

3 "status": 404,

4 "error": "Not Found",

5 "trace": "com.cognizant.springlearn.service.exception.CountryNotFoundException\r\n\tat com.cognizant.springlearn.service.CountryService.getCountry(CountryService.java:39)\r\n\tat com.cognizant.springlearn.controller.CountryController.getCountry(CountryController.java:66)\r\n\tat java.base/jdk.internal.reflect.DirectMethodHandleAccessor.invoke(DirectMethodHandleAccessor.java:189)\r\n\tat java.base/java.lang.reflect.Method.invoke(Method.java:580)\r\n\tat org.springframework.web.method.support.InvocableHandlerMethod.doInvoke(InvocableHandlerMethod.java:252)\r\n\tat org.springframework.web.method.support.InvocableHandlerMethod.invokeForRequest(InvocableHandlerMethod.java:184)\r\n\tat org.springframework.web.servlet.mvc.method.annotation.ServletInvocableHandlerMethod.invokeAndHandle(ServletInvocableHandlerMethod.java:117)\r\n\tat org.springframework.web.servlet.mvc.method.annotation.RequestMappingHandlerAdapter.invokeHandlerMethod(RequestMappingHandlerAdapter.java:934)\r\n\tat org.springframework.web.servlet.mvc.method.annotation.RequestMappingHandlerAdapter.handleInternal(RequestMappingHandlerAdapter.java:883)\r\n\tat org.springframework.web.servlet.mvc.method.AbstractHandlerMethodAdapter.handle(AbstractHandlerMethodAdapter.java:86)\r\n\tat org.springframework.web.servlet.DispatcherServlet.doDispatch(DispatcherServlet.java:963)\r\n\tat org.springframework.web.servlet.DispatcherServlet.doService(DispatcherServlet.java:866)\r\n\tat org.springframework.web.servlet.FrameworkServlet.processRequest(FrameworkServlet.java:1090)\r\n\tat org.springframework.web.servlet.FrameworkServlet.doGet(FrameworkServlet.java:892)\r\n\tat jakarta.servlet.http.HttpServlet.service(HttpServlet.java:622)\r\n\tat org.springframework.web.servlet.FrameworkServlet.service(FrameworkServlet.java:874)\r\n\tat jakarta.servlet.http.HttpServlet.service(HttpServlet.java:710)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:128)\r\n\tat org.apache.tomcat.websocket.server.WsFilter.doFilter(WsFilter.java:53)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:187)\r\n\tat org.springframework.web.filter.RequestContextFilter.doFilterInternal(RequestContextFilter.java:190)\r\n\tat org.springframework.web.filter.OncePerRequestFilter.doFilter(OncePerRequestFilter.java:116)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:187)\r\n\tat org.springframework.web.filter.FormContentFilter.doFilterInternal(FormContentFilter.java:93)\r\n\tat org.springframework.web.filter.OncePerRequestFilter.doFilter(OncePerRequestFilter.java:116)\r\n\tat org.apache.catalina.core.ApplicationFilterChain.doFilter(ApplicationFilterChain.java:187)\r\n\tat

Debugging Invalid Proto...

/debug-request What's wrong with this request? I'm getting this error: Error: Invalid protocol: get http:

GET New Request

The error "Invalid protocol: get http." is a classic URL formatting issue. Here's what's happening:

Root cause: The request URL is set to GET http://localhost:8083/country — the HTTP method GET has been accidentally typed into the URL field itself, making the full string get http://localhost:8083/country. Postman is trying to parse get http: as the protocol, which is invalid.

The fix: Remove GET (and the space after it) from the URL field so it reads only:

http://localhost:8083/country

The HTTP method is already set separately via the method dropdown (GET) to the left of the URL bar — it should not appear in the URL field itself.

Waiting for approval...

Describe what you need. Press @ for context, / for Skills.

Auto

Globals Vault Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

GET New Request

+

GET

http://localhost:8083/employees

Send

Save

Share

Docs

Params

Authorization

Headers 7

Body

Scripts

Settings

Cookies

Body

Cookies

Headers 5

Test Results

200 OK

798 ms

544 B

Save Response

JSON

Preview

Visualize

```
2  {
3    "id": 101,
4    "name": "Rahul",
5    "salary": 56000.0,
6    "permanent": true,
7    "department": {
8      "id": 2,
9      "name": "Information Technology"
10   },
11   "skills": [
12     {
13       "id": 1,
14       "name": "Java"
15     },
16     {
17       "id": 2,
18       "name": "Spring Boot"
19     }
20   ],
21   "dateOfBirth": null
22 },
23 {
24   "id": 102,
25   "name": "Priya",
26   "salary": 68000.0,
27   "permanent": true,
28   "department": {
29     "id": 1,
30     "name": "Human Resources"
31   },
32   "skills": [
33     {
34       "id": 1,
```

Debugging Invalid Proto...

/debug-request

What's wrong with this request? I'm getting this error: Error: Invalid protocol: get http:

GET New Request

The error "Invalid protocol: get http." is a classic URL formatting issue. Here's what's happening:

Root cause: The request URL is set to GET http://localhost:8083/country — the HTTP method GET has been accidentally typed into the URL field itself, making the full string get http://localhost:8083/country. Postman is trying to parse get-http: as the protocol, which is invalid.

The fix: Remove GET (and the space after it) from the URL field so it reads only:

http://localhost:8083/country

The HTTP method is already set separately via the method dropdown (GET) to the left of the URL bar — it should not appear in the URL field itself.

Waiting for approval...

Describe what you need. Press @ for context, / for Skills.

Auto

Connect Git

Console

Terminal

0

0

Globals

Vault

Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWES

GET New Request

http://localhost:8083/departments

GET

Send

Docs Params Authorization Headers 7 Body Scripts Settings

Body

JSON

1 [2 { 3 "id": 1, 4 "name": "Human Resources" 5 }, 6 { 7 "id": 2, 8 "name": "Information Technology" 9 }, 10]

200 OK · 507 ms · 240 B

Save Response

Debugging Invalid Proto...

/debug-request What's wrong with this request? I'm getting this error: Error: Invalid protocol: get http: GET New Request

The error "Invalid protocol: get http." is a classic URL formatting issue. Here's what's happening:

Root cause: The request URL is set to GET http://localhost:8083/country — the HTTP method GET has been accidentally typed into the URL field itself, making the full string get http://localhost:8083/country. Postman is trying to parse get http: as the protocol, which is invalid.

The fix: Remove GET (and the space after it) from the URL field so it reads only:

http://localhost:8083/country

The HTTP method is already set separately via the method dropdown (GET) to the left of the URL bar — it should not appear in the URL field itself.


Waiting for approval...

Describe what you need. Press @ for context, / for Skills.

Auto

Connect Git Console Terminal 0 0

Globals Vault Tools



My Workspace

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

GET New Request

GET

http://localhost:8083/countries

Send

Docs

Params

Authorization

Headers

Body

Scripts

Settings

none

form-data

x-www-form-urlencoded

raw

binary

GraphQL

JSON

Schema

Beautify

14

15

16

17

18

19

20

21

22

}

"code": "JP",

"name": "Japan"

}

,

{

"code": "FR",

"name": "France"

}

}

Body

Cookies

Headers

Test Results

200 OK

23 ms

321 B

Save Response

JSON

Preview

Visualize

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

}

{

"code": "IN",

"name": "India"

}

,

{

"code": "US",

"name": "United States"

}

,

{

"code": "DE",

"name": "Germany"

}

,

{

"code": "JP",

"name": "Japan"

}

,

{

"code": "FR",

"name": "France"

}

}

Describe what you need. Press @ for context, / for Skills.

Auto

Connect Git

Console

Terminal

0

0

Globals

Vault

Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

Q Search

Invite Upgrade

No environment

POST New Request

New Collection > New Request

Save

POST http://localhost:8083/countries

Send

Docs Params Authorization Headers Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

1
2
3
4

```
"code": "FR",  
"name": "France"
```

Body Cookies Headers 5 Test Results

200 OK 14 ms 193 B

Save Response

JSON Preview Visualize

1
2
3
4

```
"code": "FR",  
"name": "France"
```

My Workspace

Menu

COLLECTIONS

New Collection

BET New Request

ENVIRONMENTS

SPECS

FLOWS

POST New Request

New Collection > New Request

POST http://localhost:8083/countries

Docs Params Authorization Headers 9 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "code": "",
3   "name": ""
4 }
```

Body Cookies Headers 5 Test Results

JSON Preview Visualize

```
1 {
2   "code": "",
3   "name": ""
4 }
```

200 OK • 19 ms • 185 B

Save Response

Connect Git Console Terminal

0 0

Globals Vault Tools

Week 3 - Eclipse IDE

File Edit Navigate Search Project Run Window Help

Open Local Terminal on Selection

Project Explorer

- spring-learn [boot] [devtools] [Cognizant-Java-15C-DeepSkillig-main]
- src/main/java
 - com.cognizant.springlearn
 - Country.java
 - SpringLearnApplication.java
 - com.cognizant.springlearn.controller
 - CountryController.java
 - DepartmentController.java
 - EmployeeController.java
 - com.cognizant.springlearn.dao
 - com.cognizant.springlearn.dao
 - com.cognizant.springlearn.model
 - Department.java
 - Employee.java
 - Skill.java
 - com.cognizant.springlearn.service
 - CountryService.java
 - DepartmentService.java
 - EmployeeService.java
 - com.cognizant.springlearn.service.exception
 - src/main/resources
 - static
 - templates
 - application.properties
 - country.xml
 - date-format.xml
 - employee.xml
 - src/test/java
 - JRE System Library [JavaSE-17]
 - Maven Dependencies
 - src
 - target
 - HELP.md
 - mvnw
 - mvnw.cmd
 - pom.xml

Console

spring-learn - SpringLearnApplication [Spring Boot App] C:\Users\DELL\p2\pool\plugins\org.eclipse.justi.openjdk.hotspot.jre.full.win32.x86_64.21.0.6.v20250130-0529\re\bin\javaw.exe (10-Jul-2026, 4:11)

```

=====
:: Spring Boot ::      (v3.5.3)

260710|16:18:03.675|restartedMain|INFO|.s.SpringLearnApplication|logStarting|Starting SpringLearnApplication using Java 21.0
260710|16:18:03.679|restartedMain|DEBUG|.s.SpringLearnApplication|logStarting|Running with Spring Boot v3.5.3, Spring v6.2.8
260710|16:18:03.681|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|No active profile set, falling back to 1 default
260710|16:18:03.794|restartedMain|INFO|.ertyDefaultsPostProcessor|logTo|Devtools property defaults active! Set 'spring.
260710|16:18:03.794|restartedMain|INFO|.ertyDefaultsPostProcessor|logTo|For additional web related logging consider set
260710|16:18:05.143|restartedMain|INFO|.s.b.w.e.t.TomcatWebServer|initialize|Tomcat initialized with port 8083 (http)
260710|16:18:05.163|restartedMain|INFO|.o.a.c.c.StandardService|log|Starting service [Tomcat]
260710|16:18:05.163|restartedMain|INFO|.o.a.c.c.StandardEngine|log|Starting Servlet engine: [Apache Tomcat/10.1.42]
260710|16:18:05.215|restartedMain|INFO|.o.a.c.c.C.[.[/]|log|Initializing Spring embedded WebApplicationCont
260710|16:18:05.215|restartedMain|INFO|.bServerApplicationContext|prepareWebApplicationContext|Root WebApplicationContext: initialization c
260710|16:18:05.891|restartedMain|INFO|.OptionalLiveReloadServer|startServer|LiveReload server is running on port 35729
260710|16:18:05.901|restartedMain|INFO|.s.b.w.e.t.TomcatWebServer|start|Tomcat started on port 8083 (http) with context
260710|16:18:05.901|restartedMain|INFO|.s.SpringLearnApplication|logStarted|Started SpringLearnApplication in 2.762 seconds
260710|16:18:45.945|http-nio-8083-exec-2|INFO|.o.a.c.c.C.[.[/]|log|Initializing Spring DispatcherServlet 'dispatch
260710|16:18:45.947|http-nio-8083-exec-2|INFO|.o.s.w.s.DispatcherServlet|initServletBean|Initializing Servlet 'dispatcherServlet'
260710|16:18:45.955|http-nio-8083-exec-2|INFO|.o.s.w.s.DispatcherServlet|initServletBean|Completed initialization in 4 ms
260710|16:18:46.281|http-nio-8083-exec-2|INFO|.c.c.s.c.CountryController|addCountry|START
260710|16:18:46.282|http-nio-8083-exec-2|DEBUG|.c.c.s.c.CountryController|addCountry|Country : Country [code=FR, name=France]
260710|16:19:13.781|http-nio-8083-exec-3|INFO|.c.c.s.c.CountryController|addCountry|END
260710|16:19:13.783|http-nio-8083-exec-3|INFO|.c.c.s.c.CountryController|addCountry|START
260710|16:19:13.783|http-nio-8083-exec-3|DEBUG|.c.c.s.c.CountryController|addCountry|Country : Country [codes, name=]
260710|16:19:13.783|http-nio-8083-exec-3|INFO|.c.c.s.c.CountryController|addCountry|END
260710|16:19:25.810|http-nio-8083-exec-4|INFO|.c.c.s.c.CountryController|addCountry|START
260710|16:19:25.811|http-nio-8083-exec-4|DEBUG|.c.c.s.c.CountryController|addCountry|Country : Country [code=FR, name=France]
260710|16:19:25.811|http-nio-8083-exec-4|INFO|.c.c.s.c.CountryController|addCountry|END
260710|16:20:07.953|http-nio-8083-exec-5|INFO|.c.c.s.c.CountryController|addCountry|START
260710|16:20:07.954|http-nio-8083-exec-5|DEBUG|.c.c.s.c.CountryController|addCountry|Country : Country [code=, name=]
260710|16:20:07.957|http-nio-8083-exec-5|INFO|.c.c.s.c.CountryController|addCountry|END
```


My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

GET New Request

New Collection > New Request

GET http://localhost:8083/countries/IN

Docs Params Authorization Headers 7 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

1

Body Cookies Headers 5 Test Results 3

200 OK 591 ms 192

JSON

Preview Visualize

```
1 {
2   "code": "IN",
3   "name": "India"
4 }
```

Connect Git

Console

Terminal

0 0 0

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

GET New Request

+

GET

http://localhost:6083/countries/XYZ

Send

Docs Params Authorization Headers Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

Schema Beautify

1

Body Cookies Headers Test Results

404 Not Found 17 ms 188 B Save Response

Raw Preview Debug with AI

1 Country not found

Connect Git Console Terminal

0 0

Global Vault Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

POST New Request

New Collection > New Request

POST http://localhost:8083/countries

Docs Params Authorization Headers 0 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "code": "",
3   "name": ""
4 }
```

Body Cookies Headers 5 Test Results

200 OK 181 ms 185 B Save Response

JSON Preview Visualize

```
1 {
2   "code": "",
3   "name": ""
4 }
```

Connect Git Console Terminal 0 0

Globals Vault Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWES

GET New Request

GET

http://localhost:8083/countries

Send

Docs

Params

Authorization

Headers

Body

Scripts

Settings

Auth Type

Basic Auth

The authorization header will be automatically generated when you send the request. Learn more about **Basic Auth** authorization.

Username

user

Password

...

Body

Cookies

Headers

Test Results

200 OK • 416 ms • 461 B • Save Response

JSON

Preview

Visualize

```
1  [
2    {
3      "code": "IN",
4      "name": "India"
5    },
6    {
7      "code": "US",
8      "name": "United States"
9    },
10   {
11     "code": "DE",
12     "name": "Germany"
13   },
14   {
15     "code": "JP",
16     "name": "Japan"
17   }
18 ]
```

Connect Git

Console

Terminal

0 0

Globals

Vault

Tools

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWS

GET New Request

Search

Invite Upgrade

No environment

GET

http://localhost:8063/authenticate

Send

Save

Docs Params Authorization Headers Body Scripts Settings

Auth Type

Basic Auth

The authorization header will be automatically generated when you send the request. Learn more about [Basic Auth](#) authorization.

Username

user

Password

...

Body Cookies Headers Test Results

200 OK · 419 ms · 346 B · Save Response

JSON Preview Visualize

```
1 {
2   |   "token": ""
3 }
```

Connect Git Console Terminal

Global Vault Tools


```
Week 3 - Eclipse IDE
File Edit Navigate Search Project Run Window Help

# Console X Country.java RestExceptio... CountryContr... Employee.java EmployeeNotF... EmployeeDao... EmployeeCont... Department.java Skill.java spring-learn... SecurityConf... Authenticati...

spring-learn - SpringLearnApplication [Spring Boot App] C:\Users\DELL\p2\pool\plugins\org.eclipse.justi.openjdk.hotspot.jre.full.win32.x86_64.21.0.6.v20250130-0529\jre\bin\java.exe (10-Jul-2026, 6:26:33pm elapsed: 0:35:07) [pid: 28452]
260710|18:55:33.309|restartedMain|INFO|rDetailsManagerConfigurer|configure|Global AuthenticationManager configured with UserDetailsService bean with name userDetailsService
260710|18:55:33.385|restartedMain|INFO|.OptionalLiveReloadServer|startServer|LiveReload server is running on port 35729
260710|18:55:33.398|restartedMain|INFO|.s.SpringLearnApplication|start|Tomcat started on port 8083 (http) with context path '/'
260710|18:55:33.401|restartedMain|INFO|.s.SpringLearnApplication|logStarted|Started SpringLearnApplication in 0.663 seconds (process running for 1732.846)
260710|18:55:33.404|restartedMain|INFO|.ationDeltaLoggingListener|onApplicationEvent|Condition evaluation unchanged
260710|18:58:24.046|File Watcher|onApplicationEvent|Restarting due to 1 class path change (0 additions, 0 deletions, 1 modification)
260710|18:58:24.050|Thread-19|INFO|.b.w.e.t.GracefulShutdown|shutdownGracefully|Commencing graceful shutdown. Waiting for active requests to complete
260710|18:58:24.063|tomcat-shutdown|INFO|.b.w.e.t.GracefulShutdown|doShutdown|Graceful shutdown complete

=====
:: Spring Boot ::
(v3.5.3)

260710|18:58:24.205|restartedMain|INFO|.s.SpringLearnApplication|logStarting|Starting SpringLearnApplication using Java 21.0.6 with PID 28452 (D:\Cognizant-Java-FSE-DeepSkillig\Week-3\
260710|18:58:24.205|restartedMain|DEBUG|.s.SpringLearnApplication|logStarting|Running with Spring Boot v3.5.3, Spring v6.2.8
260710|18:58:24.206|restartedMain|INFO|.s.SpringLearnApplication|logStartupProfileInfo|No active profile set, falling back to 1 default profile: "default"
260710|18:58:24.594|restartedMain|INFO|.s.b.w.e.t.TomcatWebServer|initialize|Tomcat initialized with port 8083 (http)
260710|18:58:24.595|restartedMain|INFO|.o.a.c.c.StandardService|log|Starting service [Tomcat]
260710|18:58:24.595|restartedMain|INFO|.o.a.c.c.core.StandardEngine|log|Starting Servlet engine: [Apache Tomcat/10.1.42]
260710|18:58:24.618|restartedMain|INFO|.o.a.c.c.C.[.][/] |log|Initializing Spring embedded WebApplicationContext
260710|18:58:24.618|restartedMain|INFO|.bServerApplicationContext|prepareWebApplicationContext|Root WebApplicationContext: initialization completed in 409 ms
260710|18:58:24.952|restartedMain|INFO|rDetailsManagerConfigurer|configure|Global AuthenticationManager configured with UserDetailsService bean with name userDetailsService
260710|18:58:25.041|restartedMain|INFO|.OptionalLiveReloadServer|startServer|LiveReload server is running on port 35729
260710|18:58:25.061|restartedMain|INFO|.s.b.w.e.t.TomcatWebServer|start|Tomcat started on port 8083 (http) with context path '/'
260710|18:58:25.070|restartedMain|INFO|.s.SpringLearnApplication|logStarted|Started SpringLearnApplication in 0.919 seconds (process running for 1904.516)
260710|18:58:25.076|restartedMain|INFO|.ationDeltaLoggingListener|onApplicationEvent|Condition evaluation unchanged
260710|18:59:14.062|http-nio-8083-exec-2|INFO|.o.a.c.c.C.[.][/] |log|Initializing Spring DispatcherServlet 'dispatcherServlet'
260710|18:59:14.063|http-nio-8083-exec-2|INFO|.o.s.w.s.DispatcherServlet|initServletBean|Initializing Servlet 'dispatcherServlet'
260710|18:59:14.066|http-nio-8083-exec-2|INFO|.o.s.w.s.DispatcherServlet|initServletBean|Completed initialization in 3 ms
260710|18:59:14.712|http-nio-8083-exec-2|INFO|.AuthenticationController|authenticate|START
260710|18:59:14.713|http-nio-8083-exec-2|DEBUG|.AuthenticationController|authenticate|Authorization Header: Basic dXNlcjpwd2Q=
260710|18:59:14.714|http-nio-8083-exec-2|INFO|.AuthenticationController|getIsUser|START
260710|18:59:14.714|http-nio-8083-exec-2|DEBUG|.AuthenticationController|getIsUser|Encoded Credentials: dXNlcjpwd2Q=
260710|18:59:14.715|http-nio-8083-exec-2|DEBUG|.AuthenticationController|getIsUser|Decoded Credentials: user:pwd
260710|18:59:14.717|http-nio-8083-exec-2|DEBUG|.AuthenticationController|getIsUser|User: user
260710|18:59:14.717|http-nio-8083-exec-2|INFO|.AuthenticationController|getIsUser|END
260710|18:59:14.717|http-nio-8083-exec-2|DEBUG|.AuthenticationController|authenticate|Authenticated User: user
260710|18:59:14.718|http-nio-8083-exec-2|INFO|.AuthenticationController|authenticate|END
```

My Workspace

Menu

COLLECTIONS

New Collection

GET New Request

ENVIRONMENTS

SPECS

FLOWES

GET New Request

GET

http://localhost:8083/countries

Auth Type

Basic Auth

The authorization header will be automatically generated when you send the request. Learn more about [Basic Auth](#) authorization.

Username

user

Password

...

Body

JSON

Preview

Visualize

1 [

2 {

3 "code": "IN",

4 "name": "India"

5 },

6 {

7 "code": "US",

8 "name": "United States"

9 },

10 {

11 "code": "DE",

12 "name": "Germany"

13 },

14 {

15 "code": "JP",

16 "name": "Japan"

17 }

18]

200 OK

518 ms

461 B

Save Response

Connect Git

Console

Terminal

0

0

Globals

Vault

Tools



```
[
  {
    "code": "IN",
    "name": "India"
  },
  {
    "code": "US",
    "name": "United States"
  },
  {
    "code": "DE",
    "name": "Germany"
  },
  {
    "code": "JP",
    "name": "Japan"
  }
]
```