


## Avaliação-01 de BC

Nome da aluna: Kamyly Ferreira da Paixão | P4 de informática

Primeiro eu criei o repositório “bd-251”

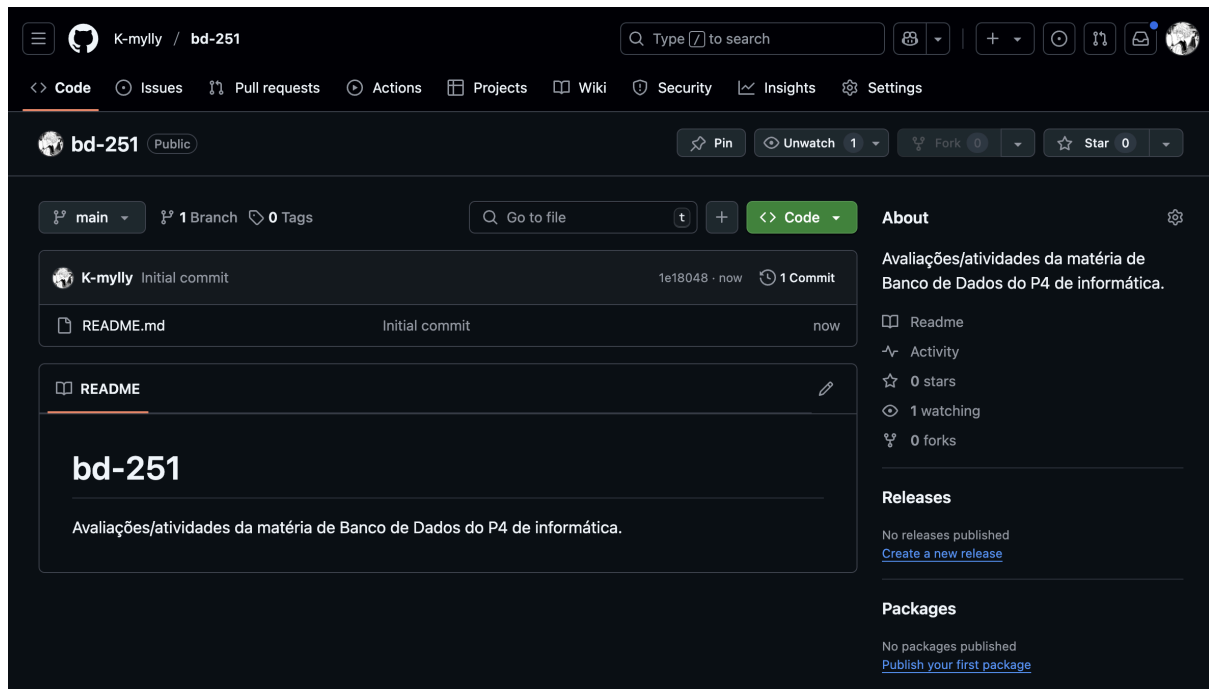

Em seguida eu clonei ele pelo terminal

```
mylly@10-45-56-53 ~ % git clone https://github.com/K-myly/bd-251.git
Cloning into 'bd-251'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Compressing objects: 100% (2/2), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Receiving objects: 100% (3/3), done.
mylly@10-45-56-53 ~ % cd bd-251
mylly@10-45-56-53 bd-251 %
```

Depois, já dentro do repositório, criei uma pasta com o nome “Avaliações” e as subpastas “Avaliação-01” até “Avaliação-10”

```
mylly@10-45-56-53 bd-251 % mkdir Avaliações/Avaliação-10
mylly@10-45-56-53 bd-251 % ls
Avaliações  README.md
mylly@10-45-56-53 bd-251 % cd Avaliações
mylly@10-45-56-53 Avaliações % ls
Avaliação-01  Avaliação-03  Avaliação-05  Avaliação-07  Avaliação-09
Avaliação-02  Avaliação-04  Avaliação-06  Avaliação-08  Avaliação-10
mylly@10-45-56-53 Avaliações %
```

Depois criei os arquivos README.md em cada subpasta. Segue um exemplo de como fiz:

```
mylly@10-45-56-53 bd-251 % touch Avaliações/Avaliação-01/README.md
mylly@10-45-56-53 bd-251 %
```

Depois utilizei o comando para adicionar ao git e fiz o commit com a data

```
mylly@10-45-56-53 bd-251 % git add .
mylly@10-45-56-53 bd-251 % git commit -m "Alterado em 12/05/2025"
[main 3ba4676] Alterado em 12/05/2025
 10 files changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-01/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-02/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-03/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-04/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-05/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-06/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-07/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-08/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-09/README.md"
 create mode 100644 "Avalia\303\247\303\265es/Avalia\303\247\303\243o-10/README.md"
```

Por fim, utilizei o comando para enviar as alterações para o GitHub

```
mylly@10-45-56-53 bd-251 % git push
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (5/5), 436 bytes | 436.00 KiB/s, done.
Total 5 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/K-mylly/bd-251.git
 1e18048..3ba4676  main -> main
mylly@10-45-56-53 bd-251 %
```

(Não realizei a etapa de criar uma conta pois já tinha.)

***Tenha um bom dia!***