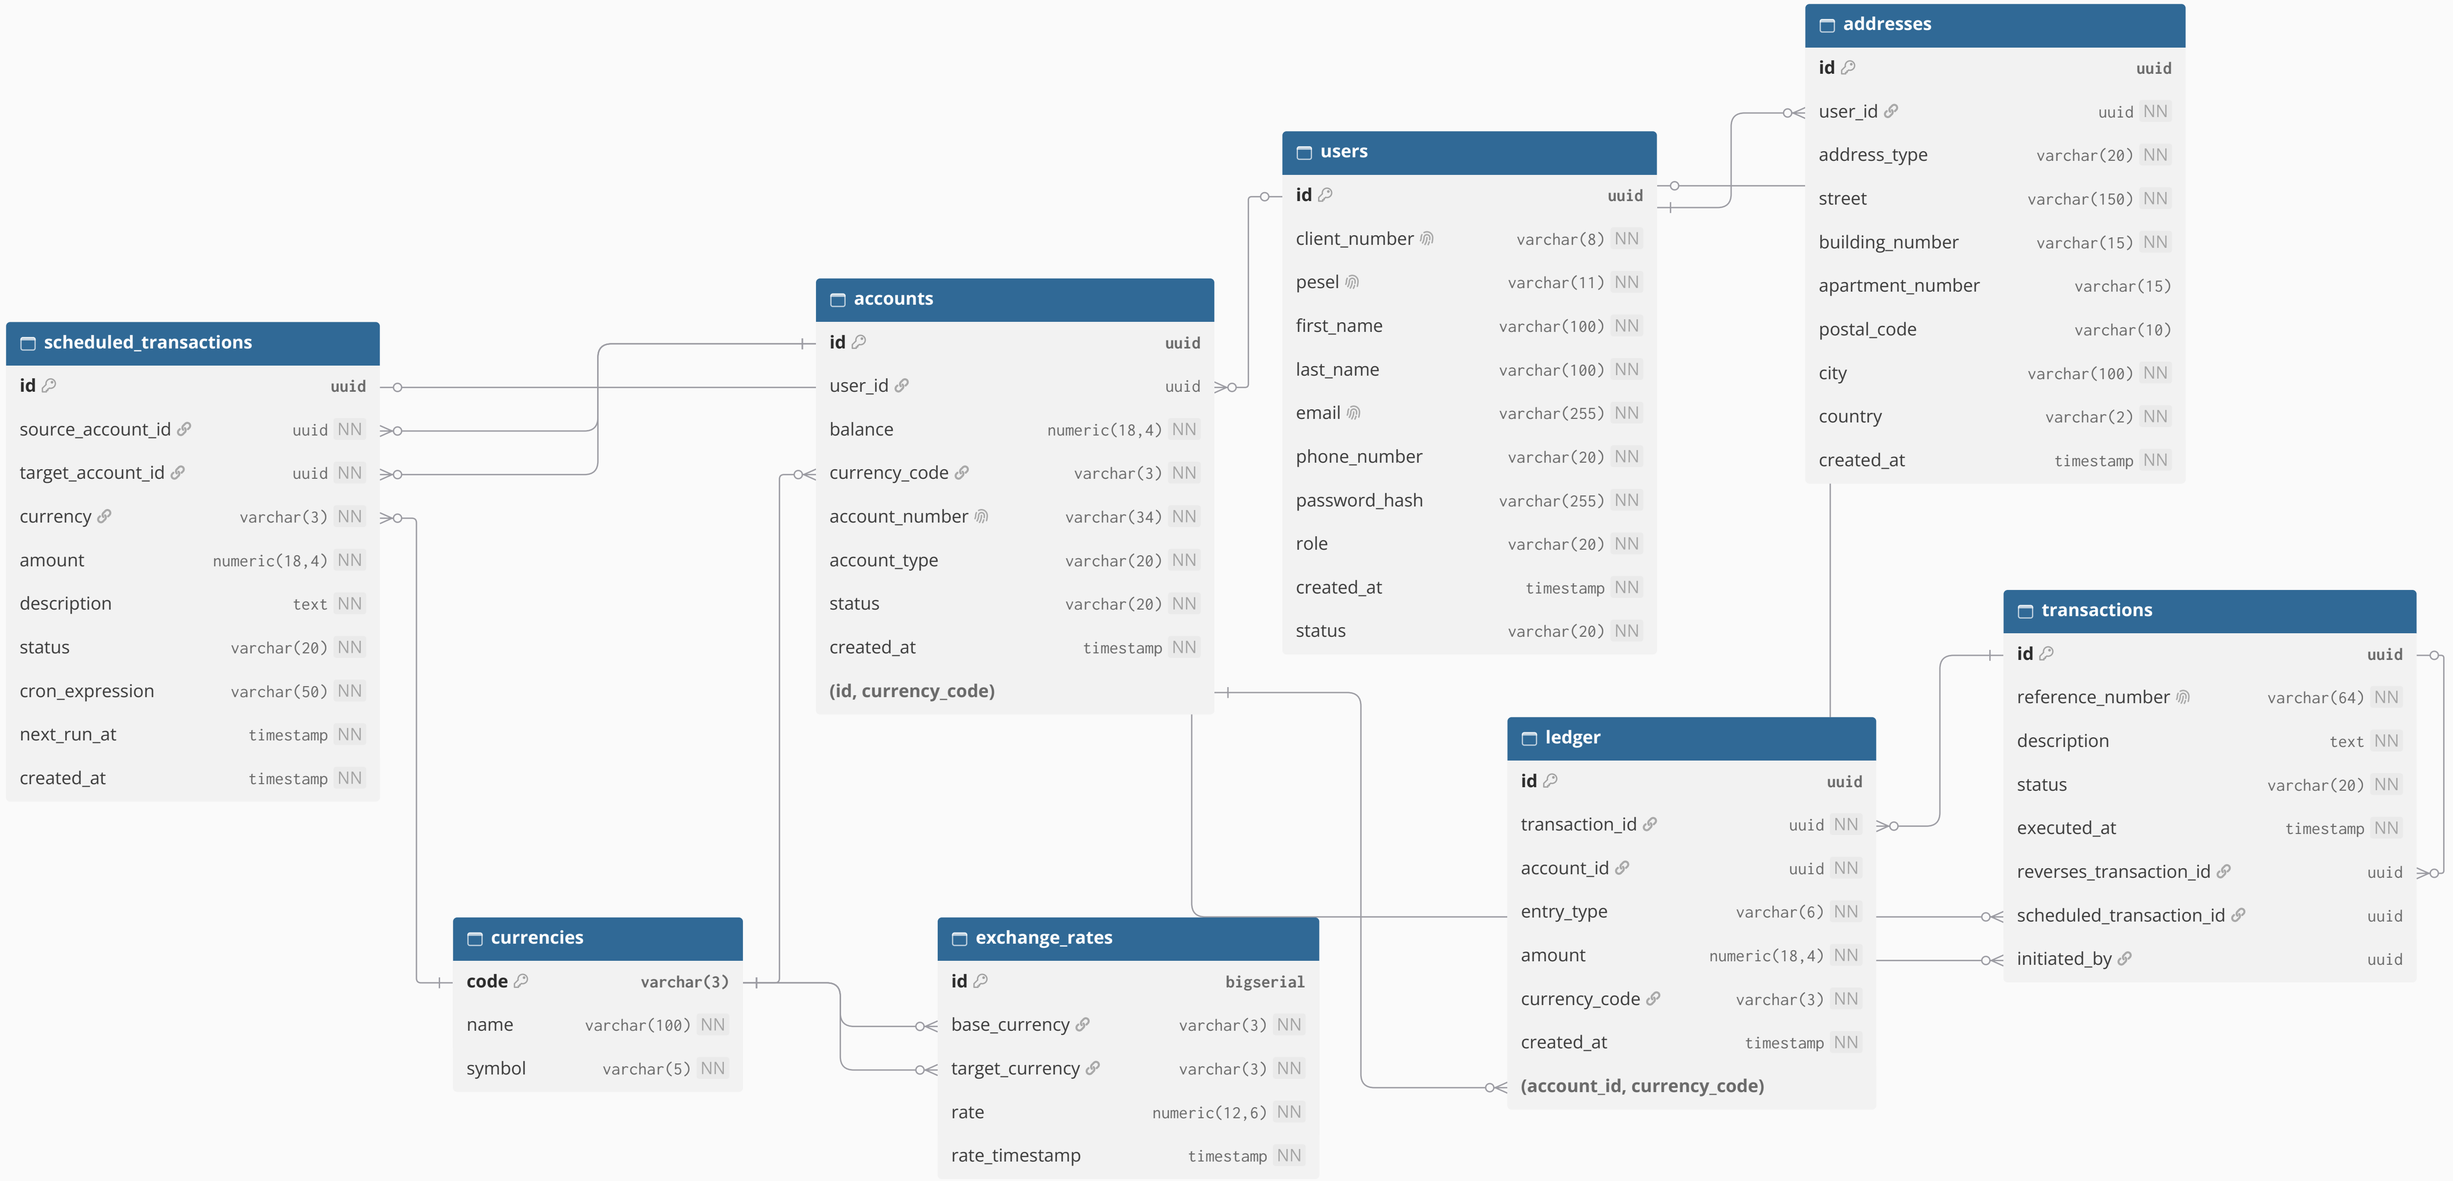
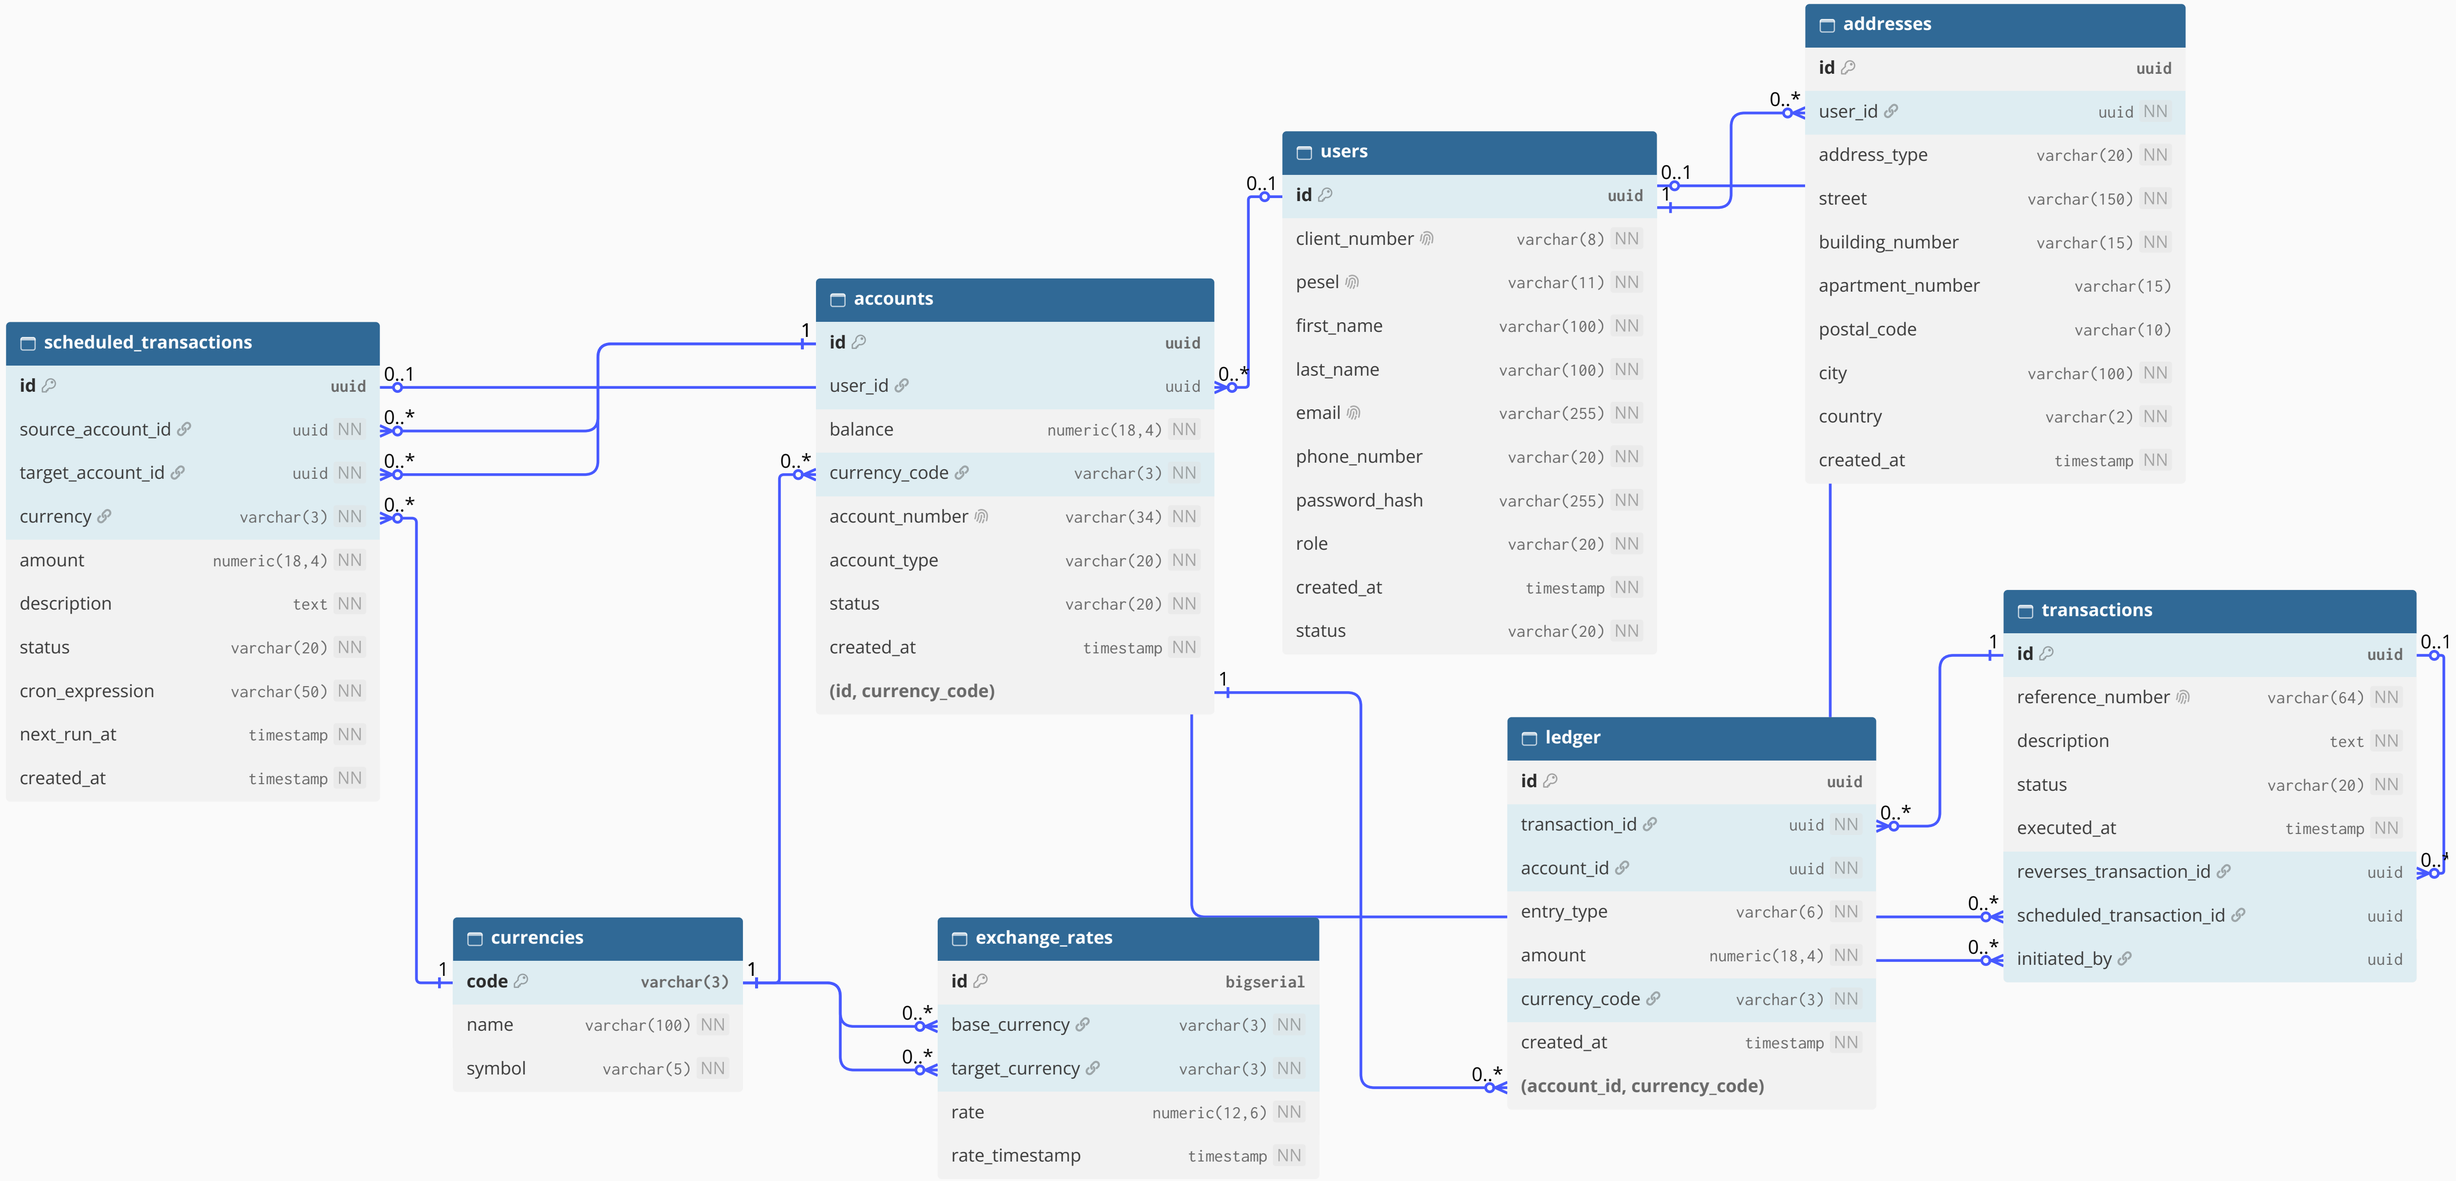

addresses
id uuid
user_id uuid NN
address_type varchar(20) NN
street varchar(150) NN
building_number varchar(15) NN
apartment_number varchar(15)
postal_code varchar(10)
city varchar(100) NN
country varchar(2) NN
created_at timestamp NN
users
id uuid
client_number varchar(8) NN
pesel varchar(11) NN
first_name varchar(100) NN
last_name varchar(100) NN
email varchar(255) NN
phone_number varchar(20) NN
password_hash varchar(255) NN
role varchar(20) NN
created_at timestamp NN
status varchar(20) NN
accounts
id uuid
user_id uuid
balance numeric(18,4) NN
currency_code varchar(3) NN
account_number varchar(34) NN
account_type varchar(20) NN
status varchar(20) NN
created_at timestamp NN
(id, currency_code)
scheduled_transactions
id uuid
source_account_id uuid NN
target_account_id uuid NN
currency varchar(3) NN
amount numeric(18,4) NN
description text NN
status varchar(20) NN
cron_expression varchar(50) NN
next_run_at timestamp NN
created_at timestamp NN
transactions
id uuid
reference_number varchar(64) NN
description text NN
status varchar(20) NN
executed_at timestamp NN
reverses_transaction_id uuid
scheduled_transaction_id uuid
initiated_by uuid
ledger
id uuid
transaction_id uuid NN
account_id uuid NN
entry_type varchar(6) NN
amount numeric(18,4) NN
currency_code varchar(3) NN
created_at timestamp NN
(account_id, currency_code)
currencies
code varchar(3)
name varchar(100) NN
symbol varchar(5) NN
exchange_rates
id bigserial
base_currency varchar(3) NN
target_currency varchar(3) NN
rate numeric(12,6) NN
rate_timestamp timestamp NN


addresses
id uuid
user_id uuid NN
address_type varchar(20) NN
street varchar(150) NN
building_number varchar(15) NN
apartment_number varchar(15)
postal_code varchar(10)
city varchar(100) NN
country varchar(2) NN
created_at timestamp NN
users
id uuid
client_number varchar(8) NN
pesel varchar(11) NN
first_name varchar(100) NN
last_name varchar(100) NN
email varchar(255) NN
phone_number varchar(20) NN
password_hash varchar(255) NN
role varchar(20) NN
created_at timestamp NN
status varchar(20) NN
accounts
id uuid
user_id uuid
balance numeric(18,4) NN
currency_code varchar(3) NN
account_number varchar(34) NN
account_type varchar(20) NN
status varchar(20) NN
created_at timestamp NN
(id, currency_code)
scheduled_transactions
id uuid
source_account_id uuid NN
target_account_id uuid NN
currency varchar(3) NN
amount numeric(18,4) NN
description text NN
status varchar(20) NN
cron_expression varchar(50) NN
next_run_at timestamp NN
created_at timestamp NN
transactions
id uuid
reference_number varchar(64) NN
description text NN
status varchar(20) NN
executed_at timestamp NN
reverses_transaction_id uuid
scheduled_transaction_id uuid
initiated_by uuid
ledger
id uuid
transaction_id uuid NN
account_id uuid NN
entry_type varchar(6) NN
amount numeric(18,4) NN
currency_code varchar(3) NN
created_at timestamp NN
(account_id, currency_code)
currencies
code varchar(3)
name varchar(100) NN
symbol varchar(5) NN
exchange_rates
id bigserial
base_currency varchar(3) NN
target_currency varchar(3) NN
rate numeric(12,6) NN
rate_timestamp timestamp NN