


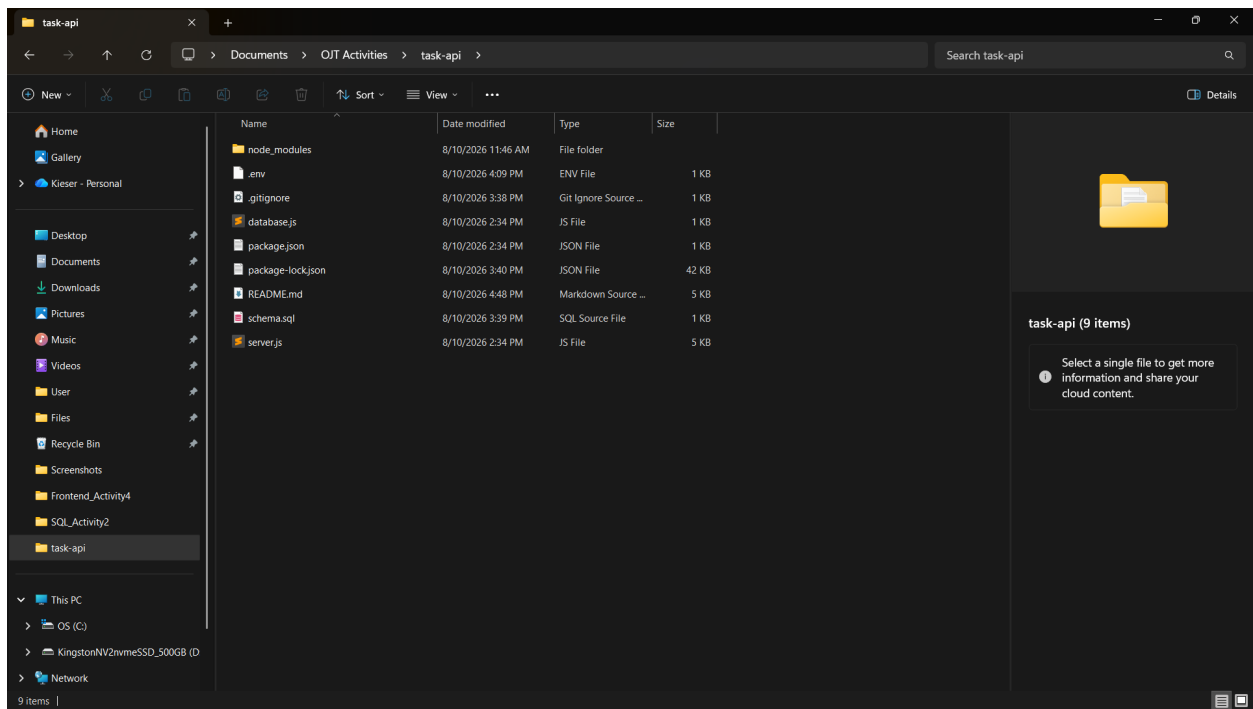

```
MINGW64/c/Users/User/Documents/OJT Activities/task-api

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ curl http://localhost:3000/
{"message":"Task API is running"}
User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ curl http://localhost:3000/tasks
[{"id":1,"title":"Learn Node.js","completed":false,"created_at":"2026-08-09T20:33:04.000Z","updated_at":"2026-08-09T20:33:04.000Z"},{"id":2,"title":"Connect Express to MySQL","completed":false,"created_at":"2026-08-09T20:33:04.000Z","updated_at":"2026-08-09T20:33:04.000Z"}]
User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ curl -X POST http://localhost:3000/tasks -H "Content-Type: application/json" -d '{"title":"Test task insertion"}'
{"id":4,"title":"Test task insertion","completed":false,"created_at":"2026-08-10T00:59:01.000Z","updated_at":"2026-08-10T00:59:01.000Z"}
User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ curl -X PUT http://localhost:3000/tasks/1 -H "Content-Type: application/json" -d '{"completed":true}'
{"id":1,"title":"Learn Node.js","completed":true,"created_at":"2026-08-09T20:33:04.000Z","updated_at":"2026-08-10T00:59:10.000Z"}
User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ curl -X DELETE http://localhost:3000/tasks/1
{"message":"Task deleted successfully"}
User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ |
```

```
C:\WINDOWS\system32\cmd.exe

> task-api@1.0.0 dev
> nodemon server.js

[nodemon] 3.1.14
[nodemon] to restart at any time, enter 'rs'
[nodemon] watching path(s): *.*
[nodemon] watching extensions: js,mjs,cjs,json
[nodemon] starting node server.js
◦ injected env (6) from .env // tip: * multiple files [ path: ['.env.local', '.env'] ]
connected to MySQL successfully
Server is running at http://localhost:3000
```

```
MINGW64~/c:/Users/User/Documents/OJT Activities/task-api

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ node --version
v24.19.0

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ npm --version
11.17.0

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ npm current
v24.19.0

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ docker start local-mysql
local-mysql

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$ docker exec -it local-mysql mysql -u root -prootpassword -e "USE ojt_store; SELECT * FROM tasks;"
mysql: [Warning] Using a password on the command line interface can be insecure.
+----+-----+-----+-----+
| id | title | completed | created_at | updated_at |
+----+-----+-----+-----+
| 1 | Learn Node.js | 0 | 2026-08-10 04:33:04 | 2026-08-10 04:33:04 |
| 2 | Connect Express to MySQL | 0 | 2026-08-10 04:33:04 | 2026-08-10 04:33:04 |
+----+-----+-----+-----+

What's next:
Try Docker Debug for seamless, persistent debugging tools in any container or image → docker debug local-mysql
Learn more at https://docs.docker.com/go/debug-cli/

User@LAPTOP-QTS1053R MINGW64 ~/Documents/OJT Activities/task-api
$
```