Additional class-2 patterns: only empty / doubly occupied cells

A occupied A empty B occupied B empty

pure02_staircase4

m = 4 | (n0, n1, n2) = (8, 0, 8)

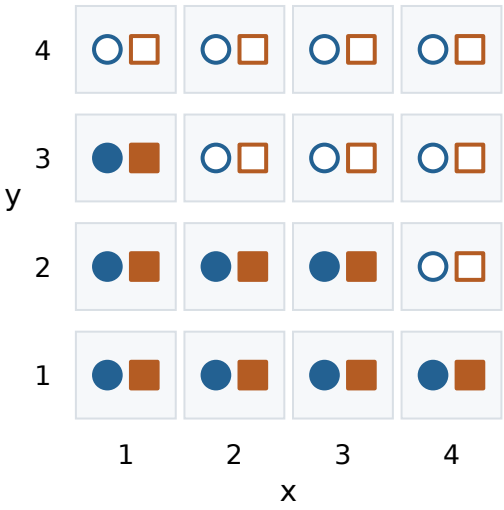

GS reachable

pure02_notched_stripe4

m = 4 | (n0, n1, n2) = (8, 0, 8)

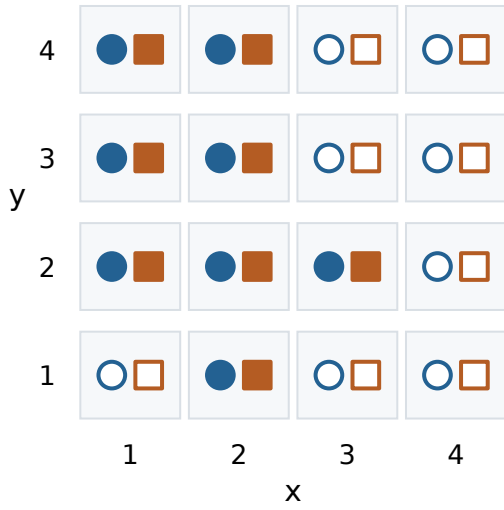

GS reachable

pure02_alternating_x

m = 2 | (n0, n1, n2) = (2, 0, 2)

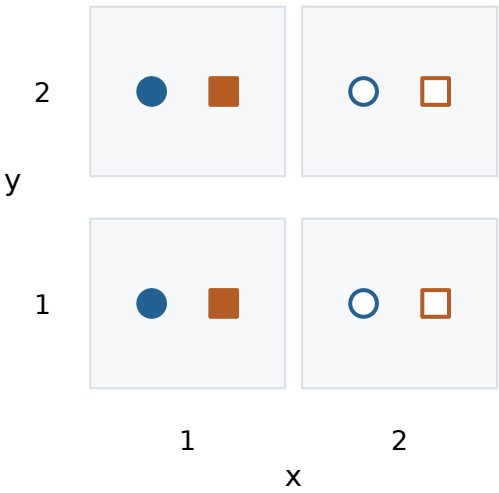

GS BLOCKED: excited-state limit

pure02_alternating_checker

m = 2 | (n0, n1, n2) = (2, 0, 2)

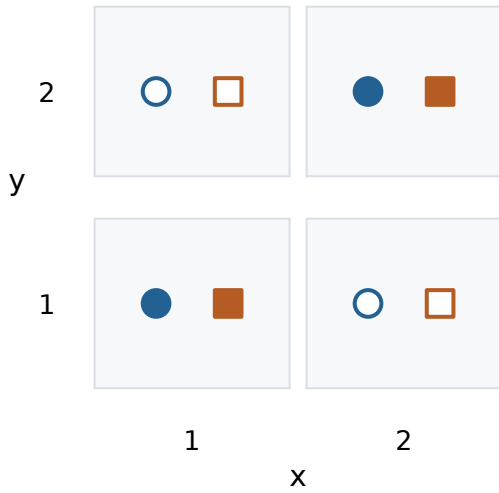

GS BLOCKED: excited-state limit

Occupation tiles in cell coordinates. Reachability checked on planned sizes; no scaling guarantee.
Blocked alternating patterns remain included as excited-limit comparisons, never as equilibrium GS data.