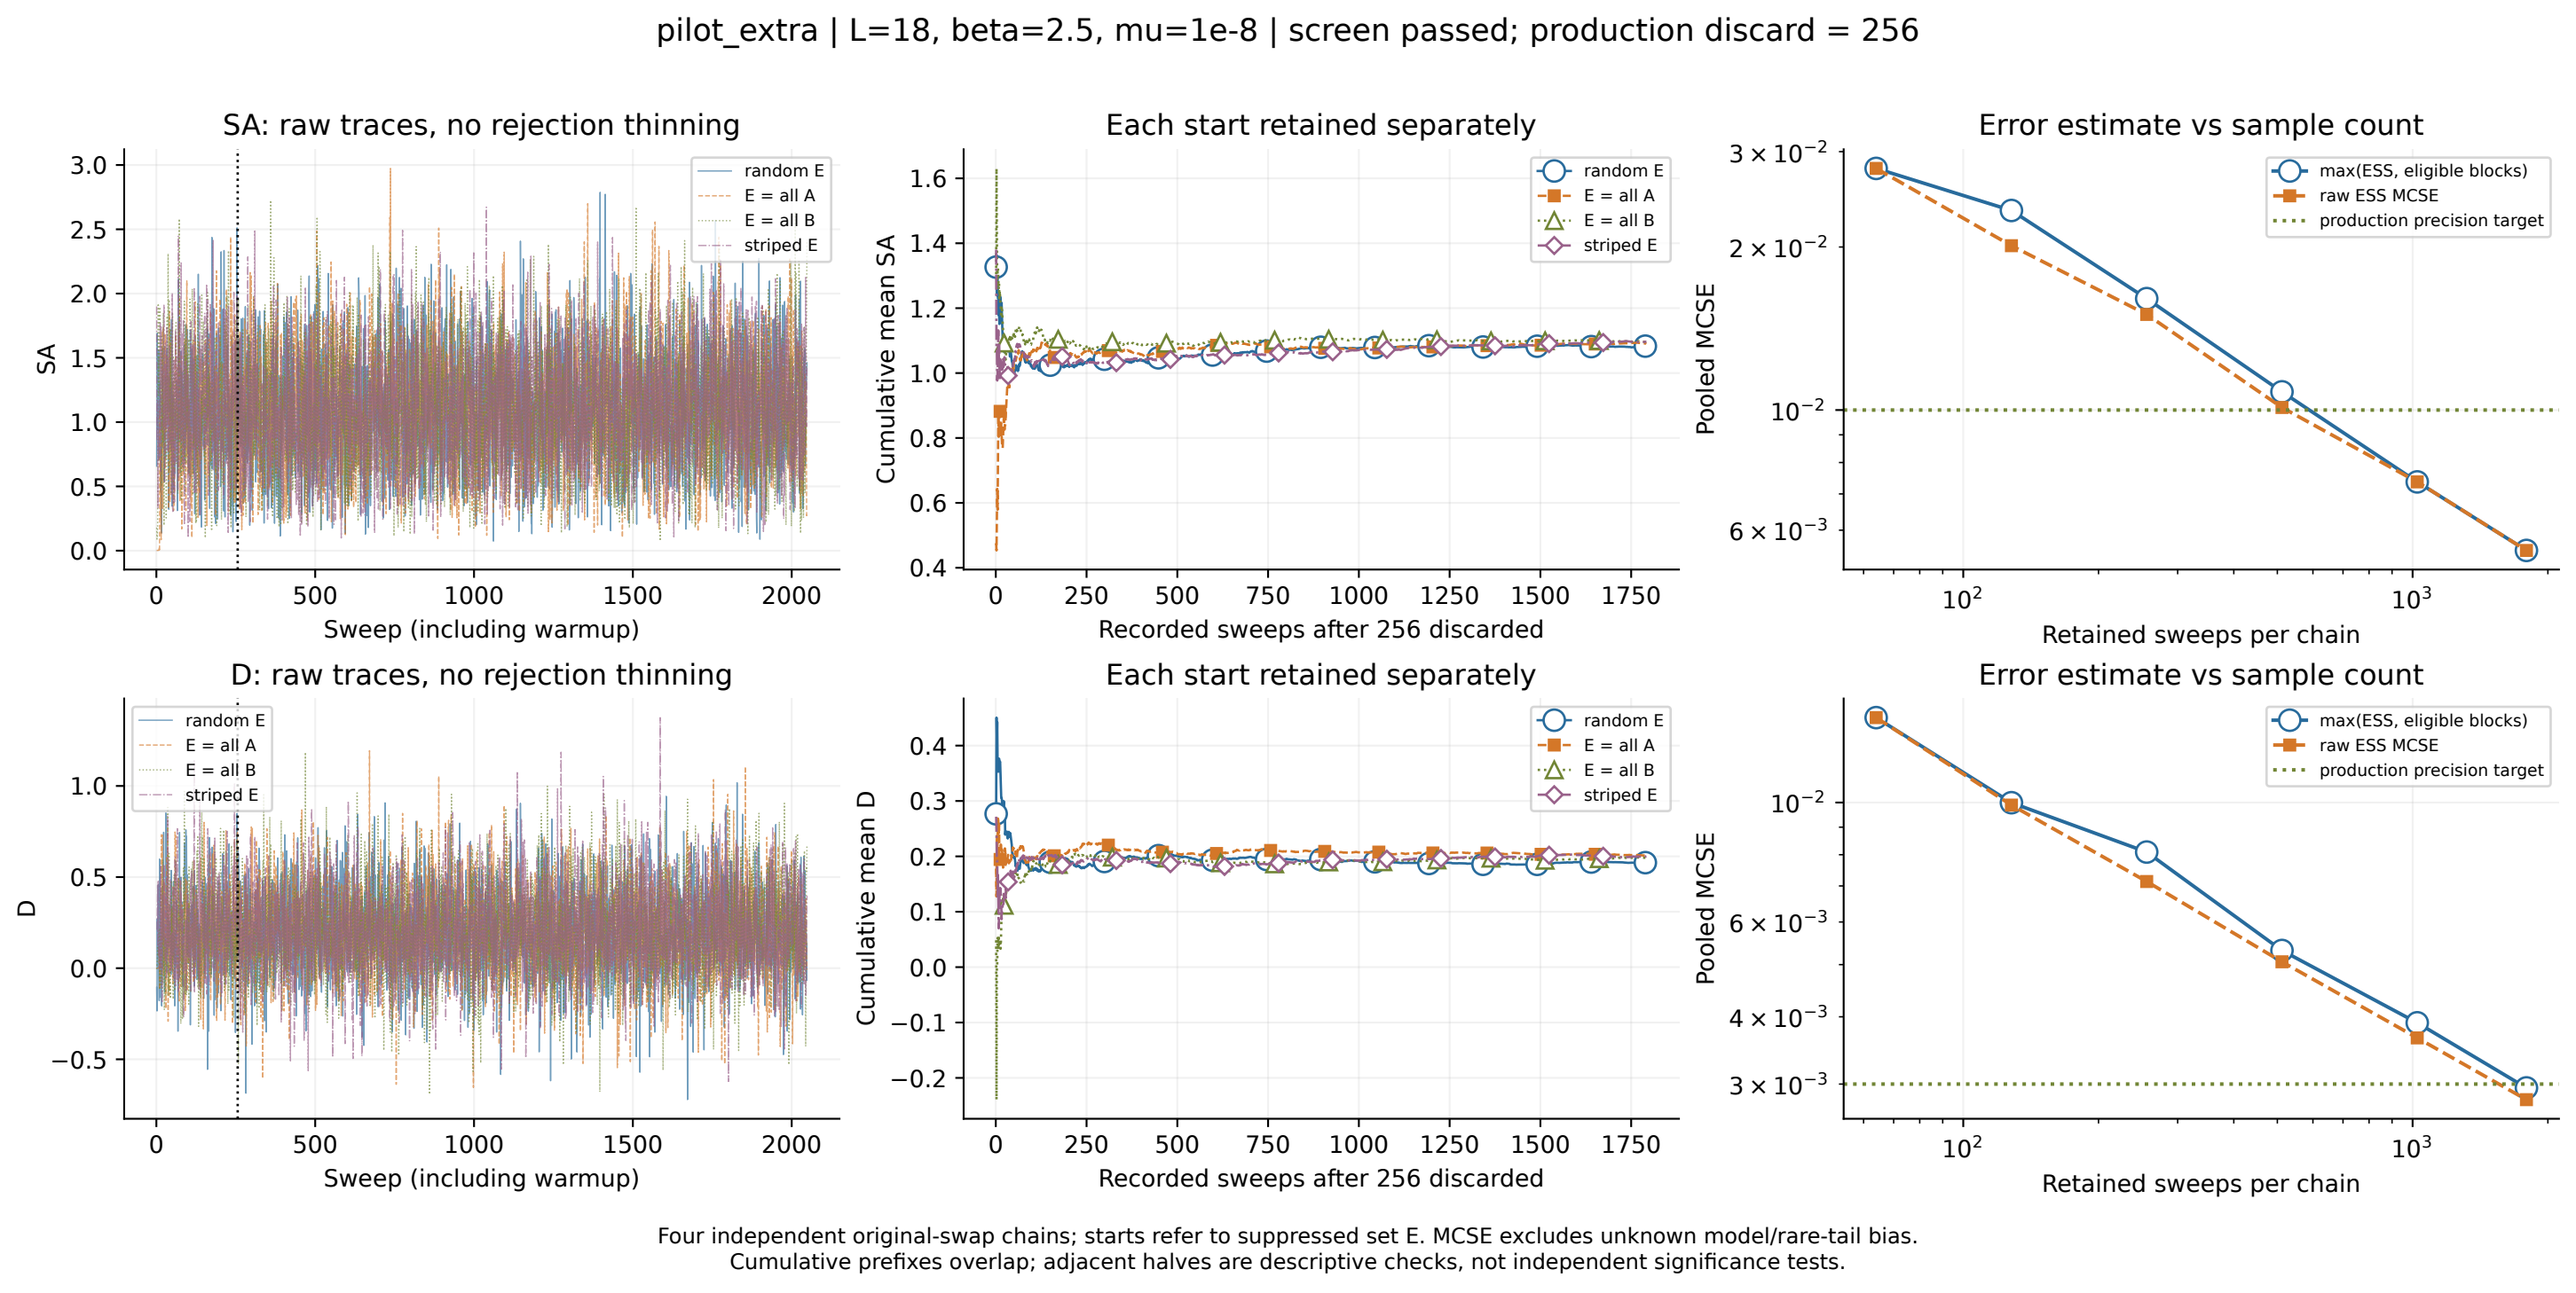

pilot_extra | L=18, beta=2.5, mu=1e-8 | screen passed; production discard = 256
SA: raw traces, no rejection thinning
SA
Sweep (including warmup)
random E
E = all A
E = all B
striped E
Each start retained separately
Cumulative mean SA
Recorded sweeps after 256 discarded
Error estimate vs sample count
Pooled MCSE
Retained sweeps per chain
max(ESS, eligible blocks)
raw ESS MCSE
production precision target
D: raw traces, no rejection thinning
D
Cumulative mean D
Four independent original-swap chains; starts refer to suppressed set E. MCSE excludes unknown model/rare-tail bias.
Cumulative prefixes overlap; adjacent halves are descriptive checks, not independent significance tests.