



Q1. configure iptables as a network firewall your network address is 192.168.25.0/24 configure 2 clients create a new chain by name CDAC configure redhat,microsoftand oracle websites fore second client allow hdfc banck website, sbi bank website for all clients allow google and 192.168.72.20 DNS . block all other traffic

ANS→


Step.1 On the Server Machine add Network Adaptor as Bridge then add second as Host-Only

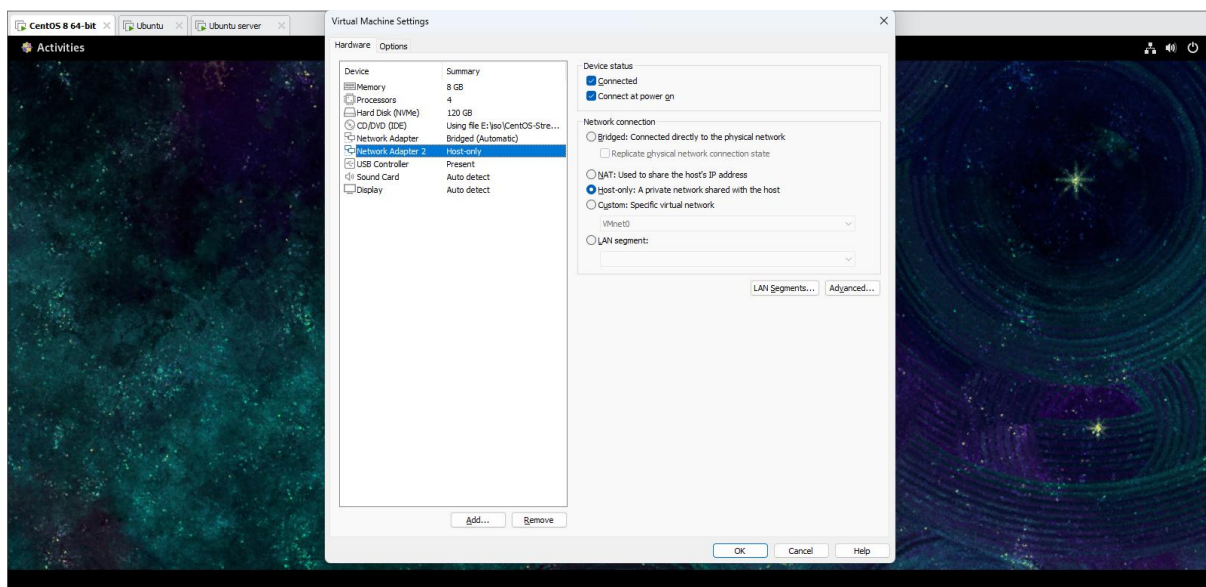


In second network adaptor do this settings

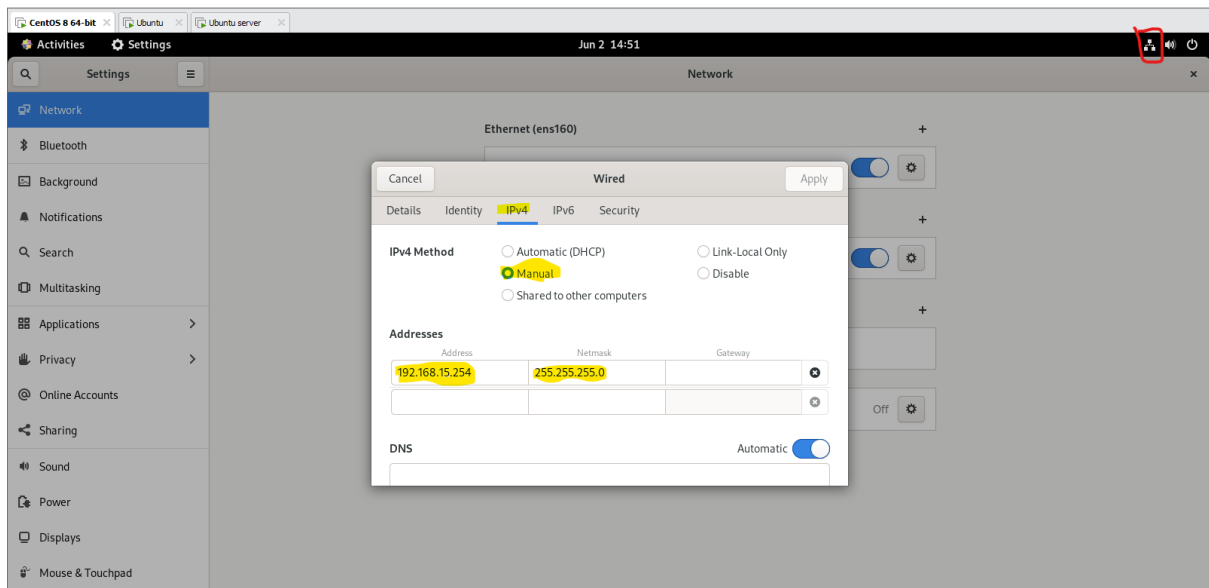


Come on Client1 Machine add Network Adaptor as Host only.

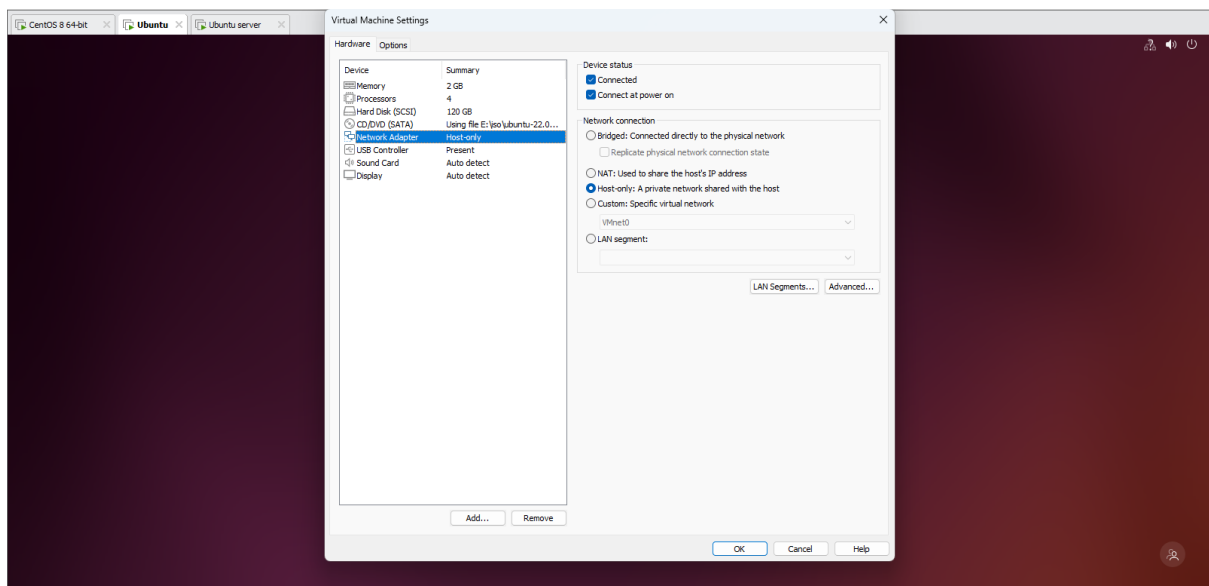


Come on Client2 Machine add Network Adaptor as Host-Only.

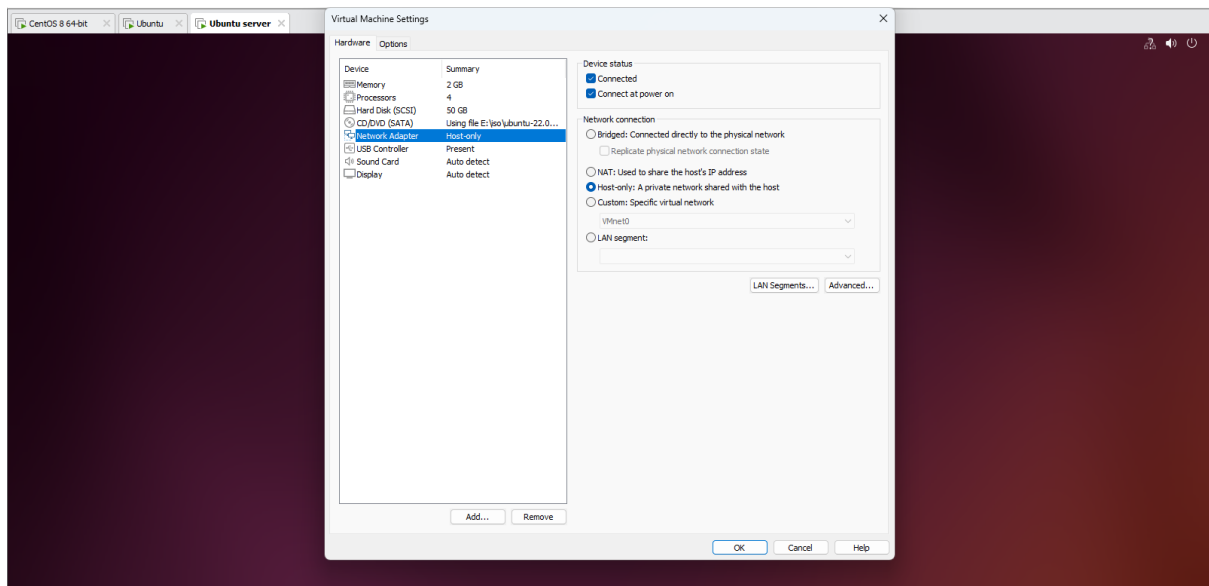

Step.2 On Client1 Machine open Network settings and add ip address and DNS like below.

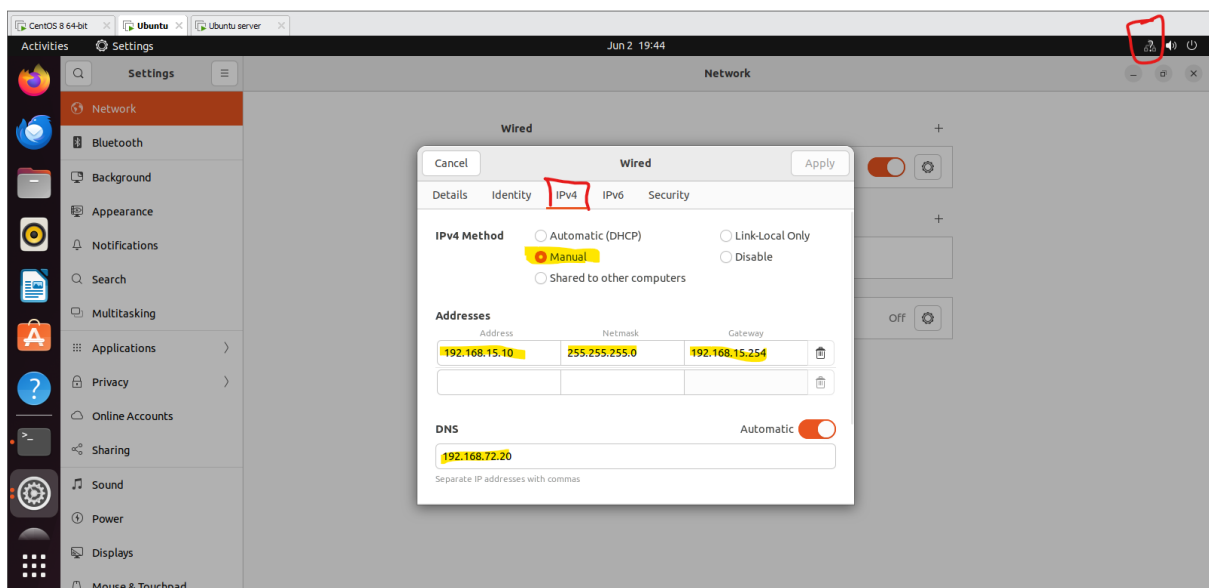

On Client2 Machine open Network settings and add ip address and DNS like below.

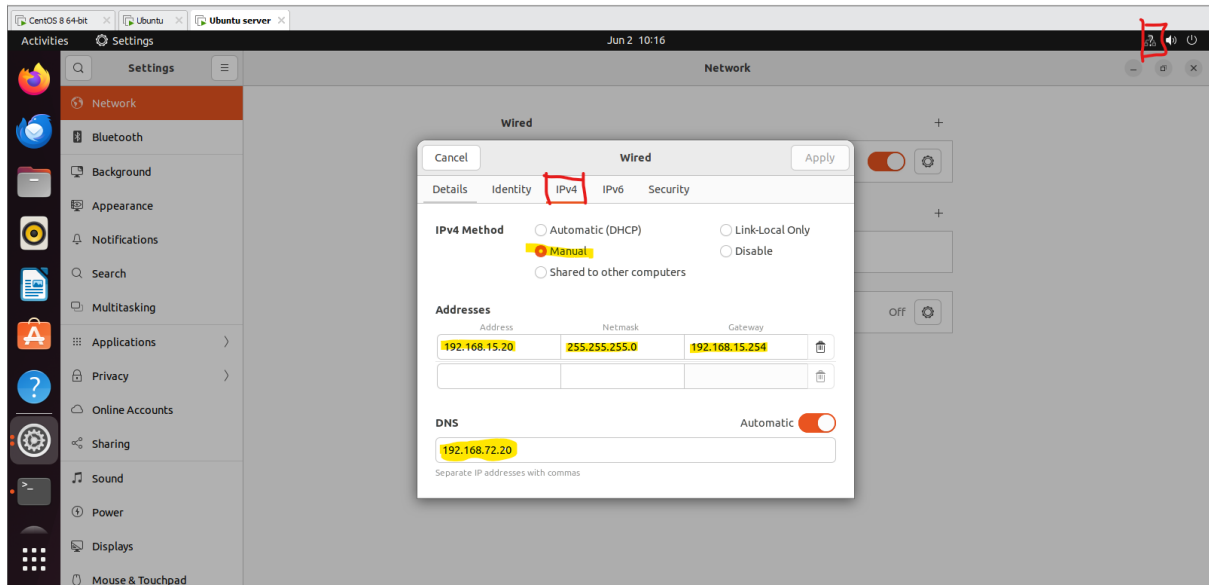

Step.3 On Server Machine open terminal

#Flush existing rules

```
sudo iptables -F
```

```
sudo iptables -X
```

```
sudo iptables -t nat -F
```

```
sudo iptables -t nat -X
```

```
sudo iptables -t mangle -F
```

```
sudo iptables -t mangle -X
```

#Create new chain

```
sudo iptables -N CDAC
```

Allow DNS for all clients

```
sudo iptables -A CDAC -s 192.168.25.0/24 -d  
192.168.72.20 -p udp --dport 53 -j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.0/24 -d  
192.168.72.20 -p tcp --dport 53 -j ACCEPT
```

Allow Google for all clients

```
sudo iptables -A CDAC -s 192.168.25.0/24 -d  
google.com -p tcp --match multiport --dports 80,443 -j  
ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.0/24 -d  
www.google.com -p tcp --match multiport --dports  
80,443 -j ACCEPT
```

Allow banking sites for Client2

```
sudo iptables -A CDAC -s 192.168.25.11 -d  
hdfcbank.com -p tcp --match multiport --dports 80,443  
-j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.11 -d  
www.hdfcbank.com -p tcp --match multiport --dports  
80,443 -j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.11 -d sbi.co.in -p  
tcp --match multiport --dports 80,443 -j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.11 -d onlinesbi.sbi  
-p tcp --match multiport --dports 80,443 -j ACCEPT
```

Allow RedHat, Microsoft, Oracle for Client1

```
sudo iptables -A CDAC -s 192.168.25.10 -d redhat.com -  
p tcp --match multiport --dports 80,443 -j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.10 -d  
www.redhat.com -p tcp --match multiport --dports  
80,443 -j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.10 -d  
microsoft.com -p tcp --match multiport --dports 80,443  
-j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.10 -d  
www.microsoft.com -p tcp --match multiport --dports  
80,443 -j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.10 -d oracle.com -  
p tcp --match multiport --dports 80,443 -j ACCEPT
```

```
sudo iptables -A CDAC -s 192.168.25.10 -d  
www.oracle.com -p tcp --match multiport --dports  
80,443 -j ACCEPT
```

```
# Drop all other traffic
```

```
sudo iptables -A CDAC -j DROP
```

```
# Apply chain to FORWARD/OUTPUT
```

```
sudo iptables -A FORWARD -s 192.168.25.0/24 -j CDAC
```

```
sudo iptables -A OUTPUT -s 192.168.25.0/24 -j CDAC
```