GenAI

Generative AI

↓


create new content


ANN

RNN → LSTM

CNN

Transformer

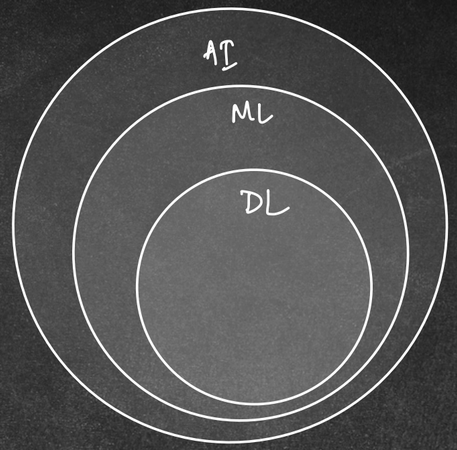

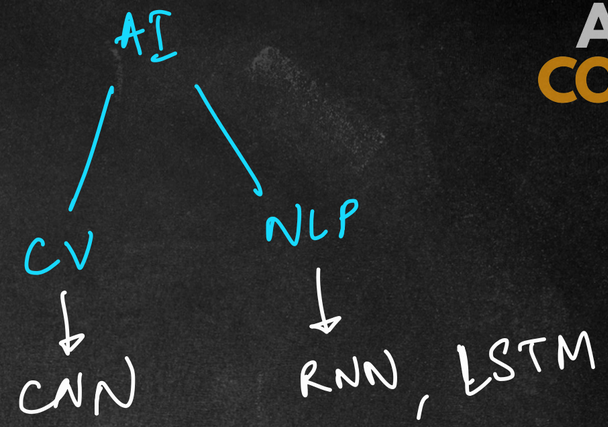

APNA COLLEGE

images/videos → dalle., midjourney

text → chatgpt, claude, gemini

audio/sound/music → sound draw

code → copilot

:

:

:

LLMs

Large Language Models

- ✓ Billions of parameters
- class of models in NLP
- ✓ trained on huge datasets
- ✓ capabilities ↑↑

How are you?

Q: why should I code in Python?


Ans: Python is a great language

GenAI → text / languages → LLMs

APNA COLLEGE

LLMs

Large Language Models

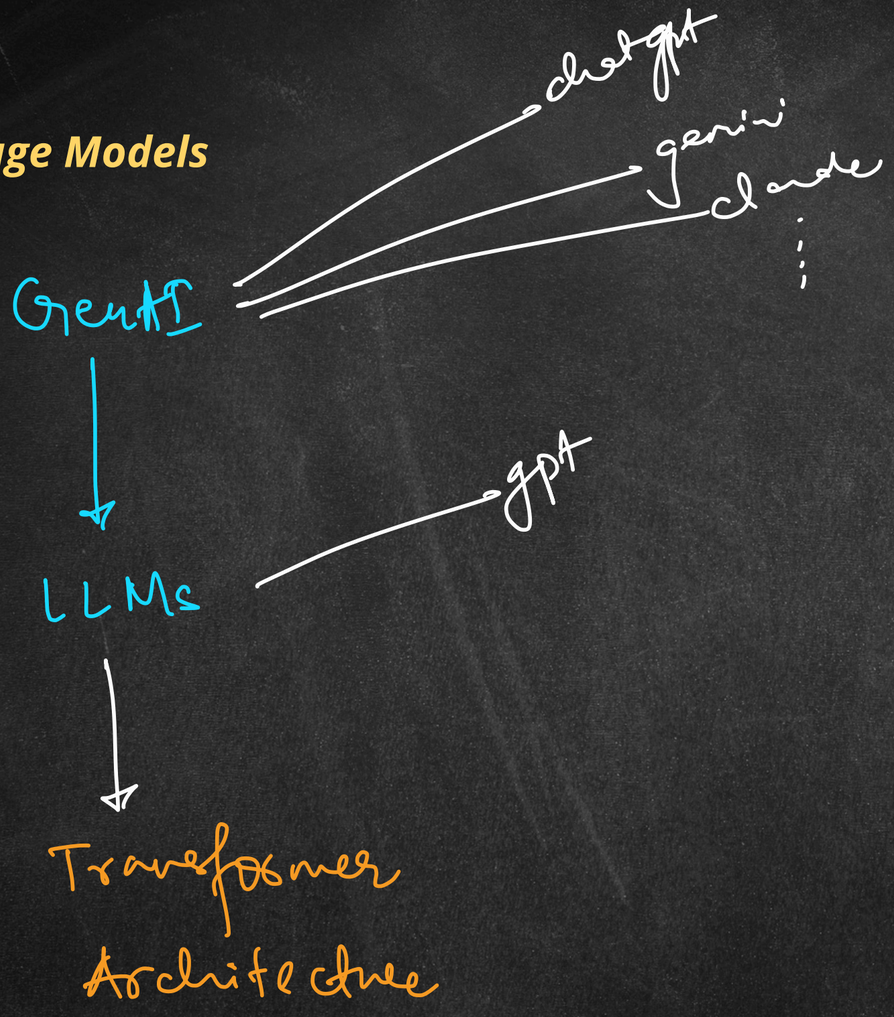

APNA COLLEGE

Transformers

NN arch.

2017 ⇒ "Attention is all you need"

Attention ⇒ parallelly

Sequence → text

"I like Python"

RNN, LSTM, CNN

step by step (sequentially)

sequence models

APNA COLLEGE

Transformers

Embedding → RNN

word embeddings → vectors

text → "I like Python" → numbs

I, like, Python

[0.1, 0.7] [0.32, 0.41] [0.8, 0.2]

features

Is it a language? proj

Is it an object?

GPT-3 → 12k+ → 12,288 dimensions in embeddings

APNA COLLEGE

Transformers

Static vs Contextual Embedding

I will read a book.

I will book movie tickets.

book → [0.32, 0.5, 0.01]

Word2Vec

↓

2 layer NN

↓

Static embedding


Python → snake

↳ prog. language

APNA COLLEGE

Transformers

Architecture

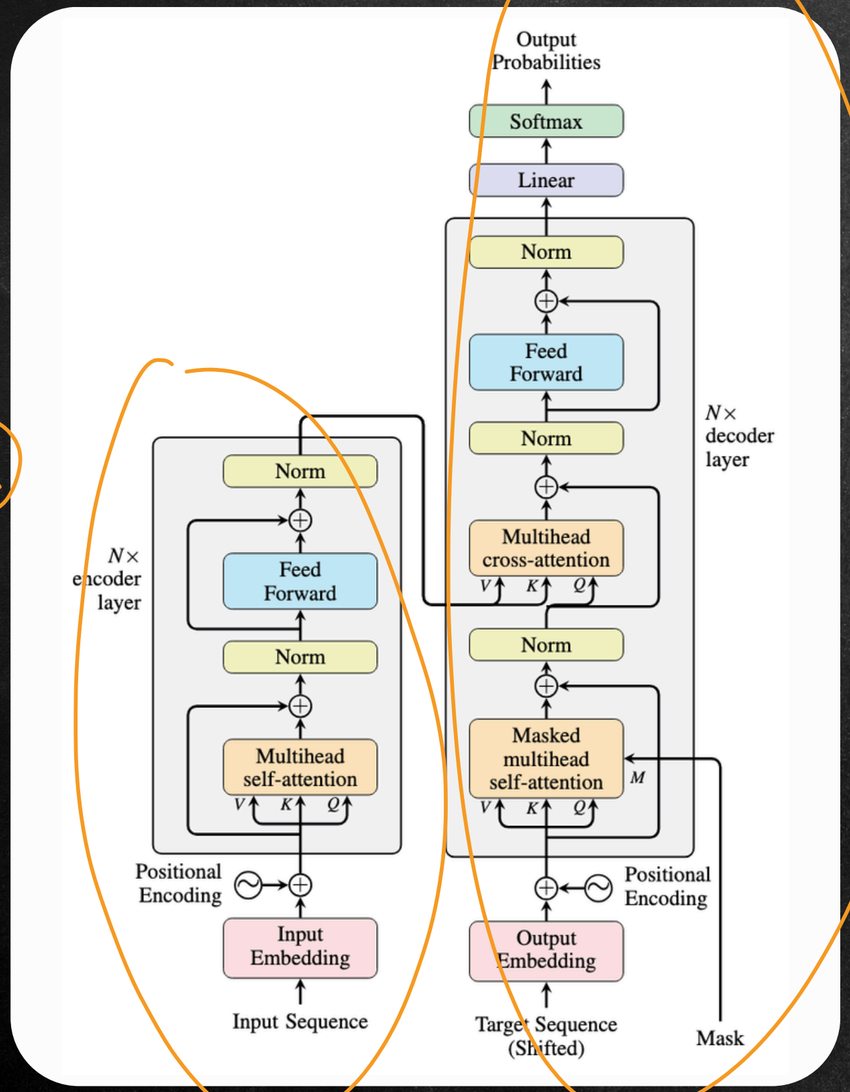

(1) encoder understand
(2) decoder generate

"I like Python" → contextual embeddings

inp sequence

I
liked
Python


(1) summarize
(2) sentiment analysis
(3) text classification
(4) speech translation

① Tokenization

② Contextual embeddings

③ pass to the decoder

"I like Python"

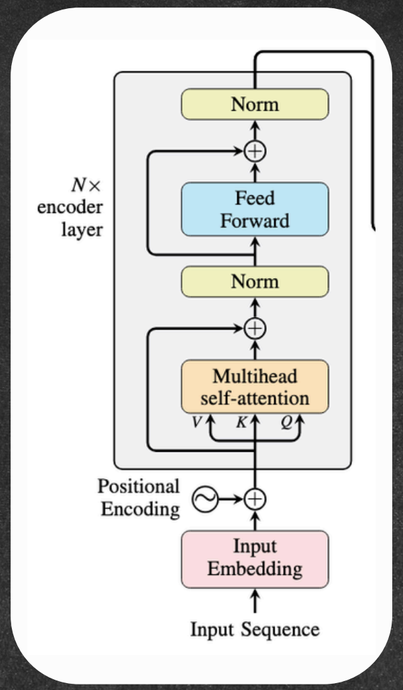

Encoder

"I like Python"

[I, like, Python]

0.1	0.5	0.9
0.3	0.8	0.2
....	....	....
0.0	0.2	0.3

Static embedding ⟶ contextual

\+

Vocab


APNA COLLEGE

"I like Python"

[I, like, Python]

0.1	0.5	0.9
0.3	0.8	0.2
....	....	....
0.0	0.2	0.3

generate o/p one at a time

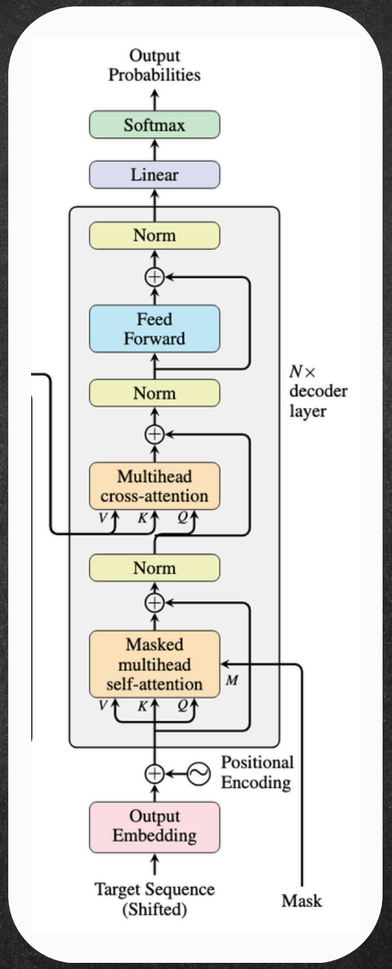

Decoder

<START>
मुझे
पाइथन
पसंद
है
<EOS> end of sequence


मुझे → I/P
मैं → 10-1.
वह → 0.2-1.
यहाँ → 0.05-1.

APNA COLLEGE

Different Tranformer Architectures

APNA COLLEGE


- text classification
- Sentiment analysis

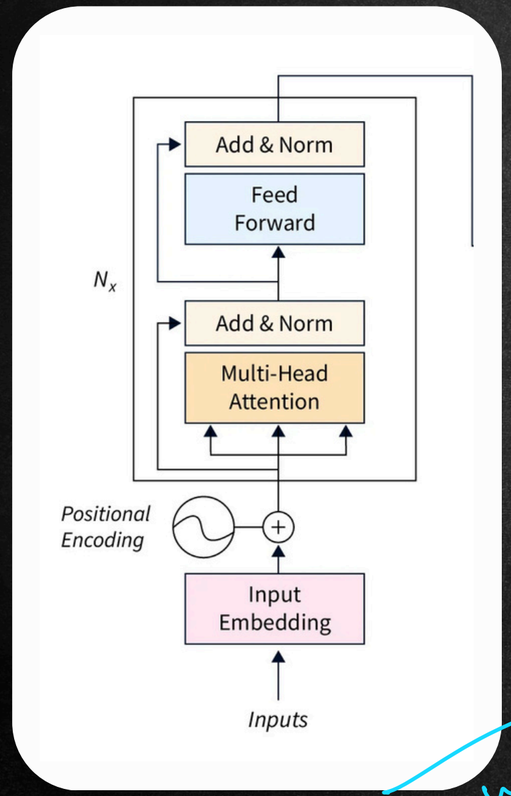

understanding

BERT

encoder - only transformer arch.

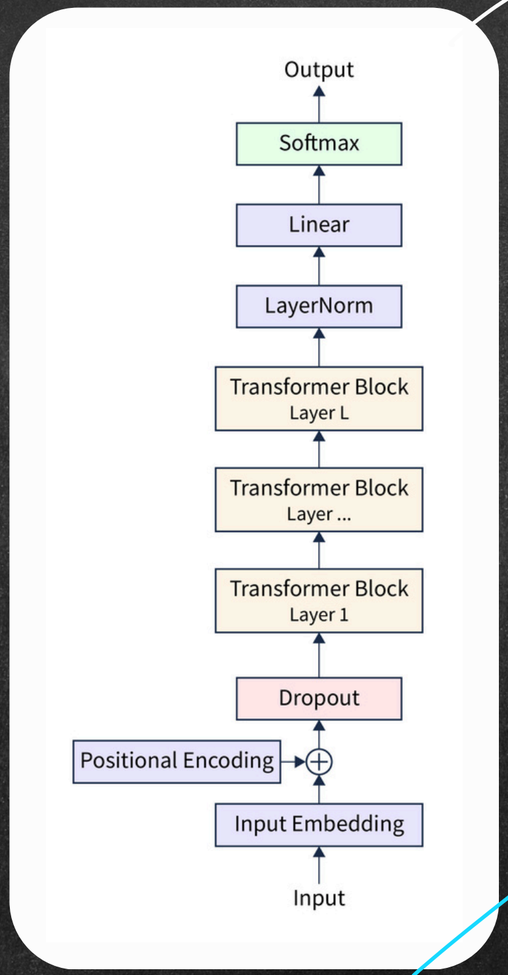

text generation

GPT / Claude

decoder - only transformer arch.


① conversation


② easier to train

token by token

Encoder

Positional Encoding

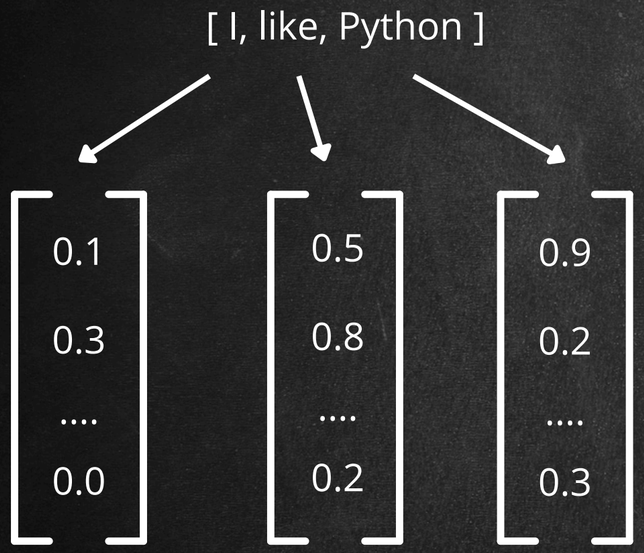

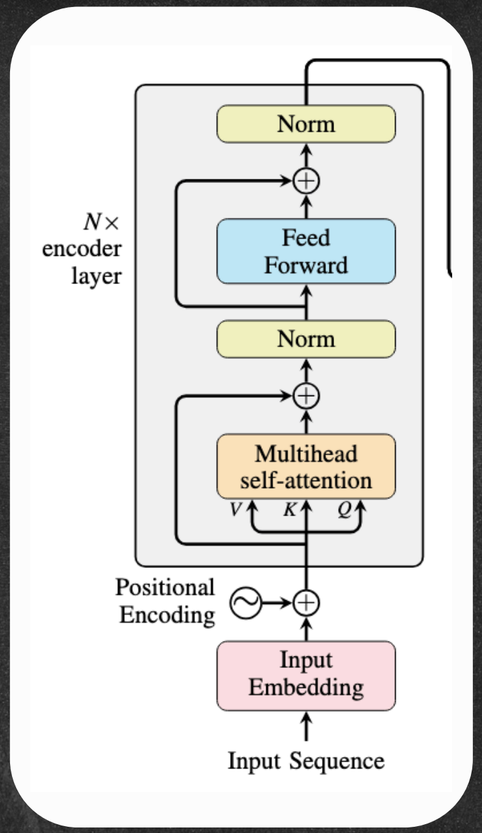

I like Python

Python like I

RNN → sequentially

I, like, Python

Transformers

↓


Parallelization

- training faster
- performance ↑

APNA COLLEGE

Encoder

Positional Encoding

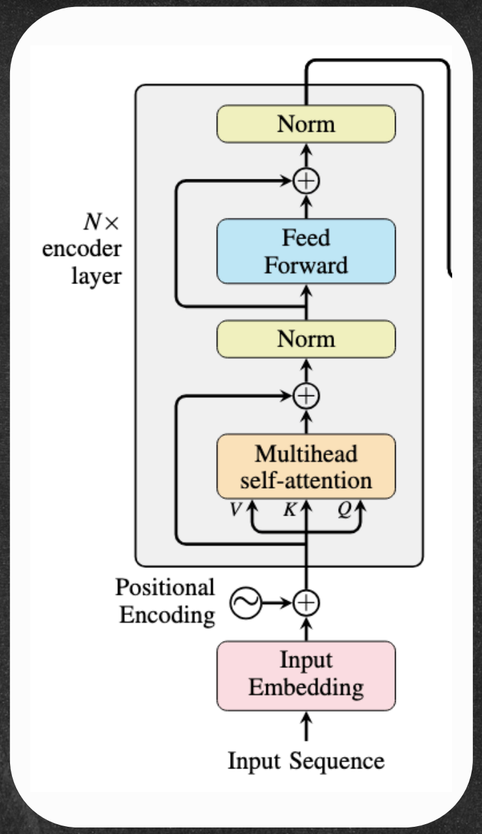


final o/p = I/p embedding + Position embeddings

$$PE(pos, 2i) = \sin\left(pos / 10{,}000^{2i/d_{model}}\right)$$

$$PE(pos, 2i+1) = \cos\left(pos / 10{,}000^{2i/d_{model}}\right)$$

[I, like, Python]

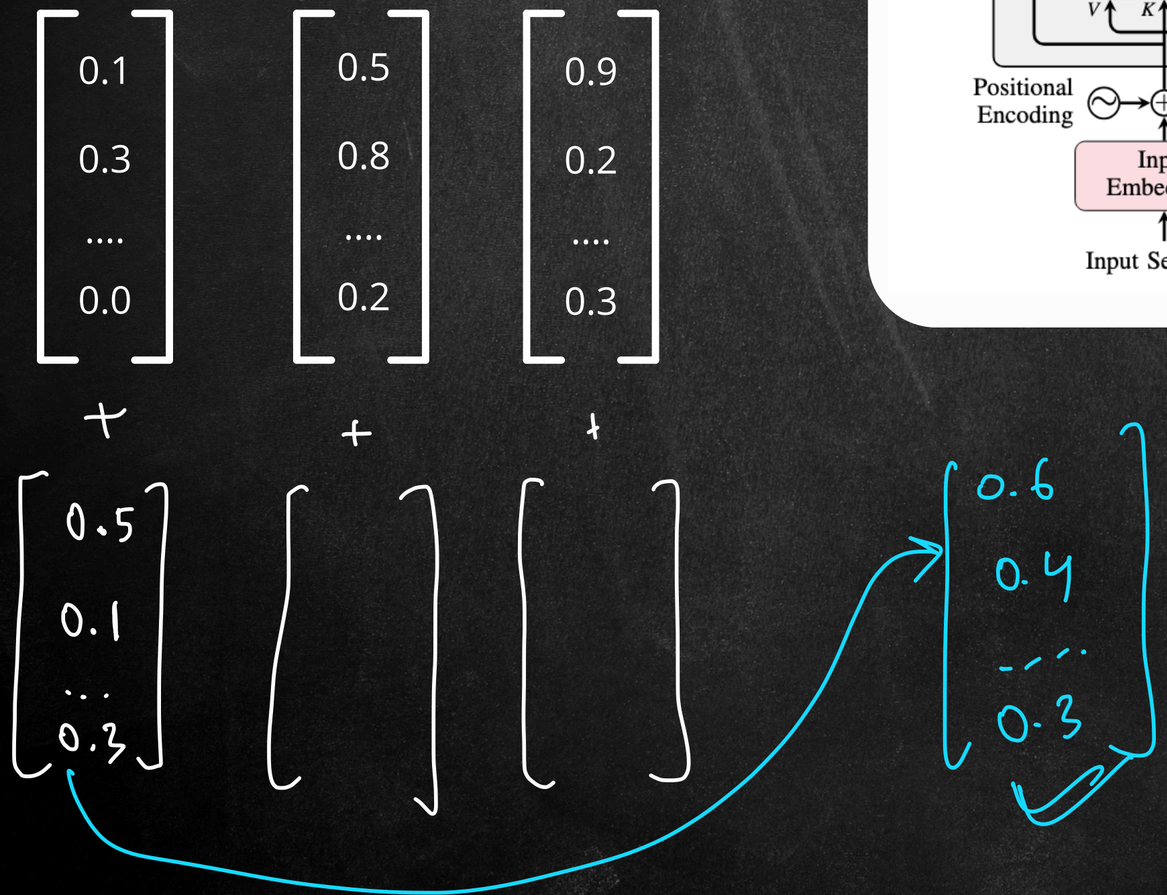


Attention ⇒ focus

what/who should it pay attention to?

Attention is all you need.

"The animal didn't cross the street because it was tired."

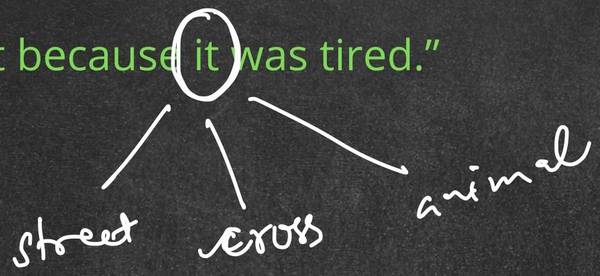


mapping

Q → K, V

Attention

Attention is all you need.

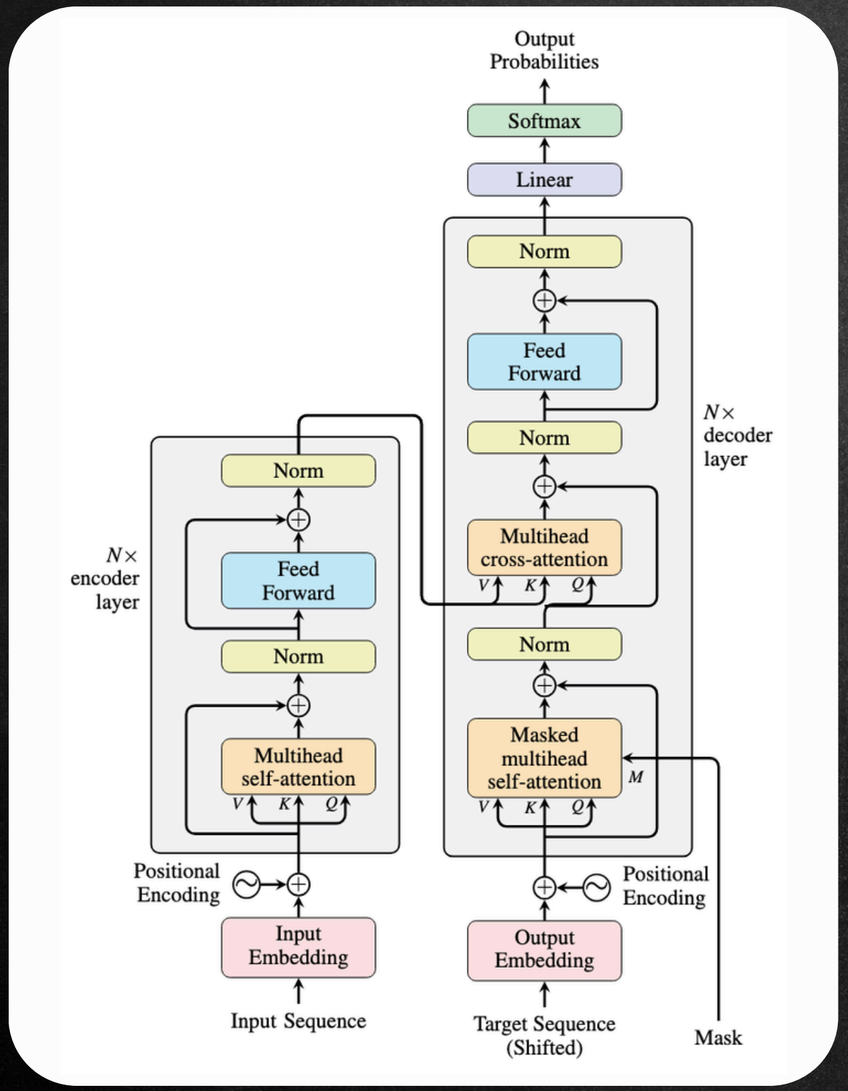

Attention

Teacher → Transformer

Attention is all you need.

Query (Q): what is the capital of India?

R: geography (Key) → V: capital of India

strong match = 0.85

low = 0.05

S: math (Key) → V: 2+2=4

G: history (Key) → V: Independence/Constitution of India

med. = 0.1

3 matrices

Q, K, V

attention score ⇒ scaled dot product

Attention (Q, K, V)

APNA COLLEGE

Attention

Attention is all you need.

input seq → n token

d → dimension of model


① $X = \begin{bmatrix} 0.3 \\ 0.4 \\ \cdots \\ 0.1 \end{bmatrix} \Rightarrow n \times d$

$Q = X \cdot W_Q \rightarrow d \times d_k$

$K = X \cdot W_K \rightarrow d \times d_k$

$V = X \cdot W_V \rightarrow d \times d_v$

↳ weight matrices

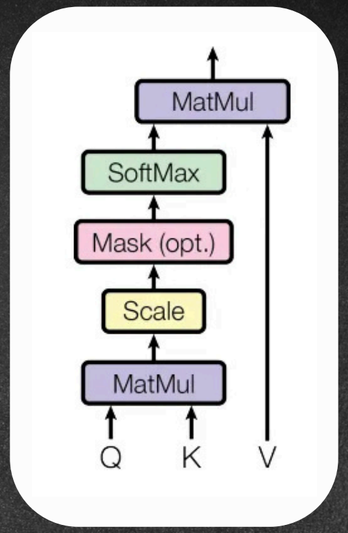

Scaled Dot Product Attention


⇓

Attention(Q, K, V)

APNA COLLEGE

Attention

Attention is all you need.

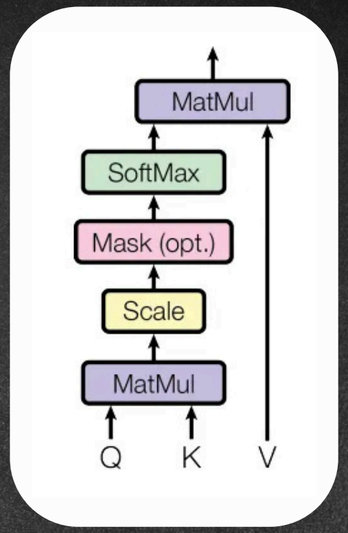

geography — 0.05
maths →

ABNA COLLEGE


Q, K, V

(dot product)

1. similarity score ⇒ $Q \cdot K^T$
2. scaling ⇒ $\frac{Q \cdot K^T}{\sqrt{d_k}}$
3. softmax ⇒ $\text{softmax}\left(\frac{Q \cdot K^T}{\sqrt{d_k}}\right)$
   ↳ probabilities
4. $\text{Attention}(Q, K, V) = \text{softmax}\left(\frac{Q \cdot K^T}{\sqrt{d_k}}\right) \cdot V$

Attention

Self-Attention

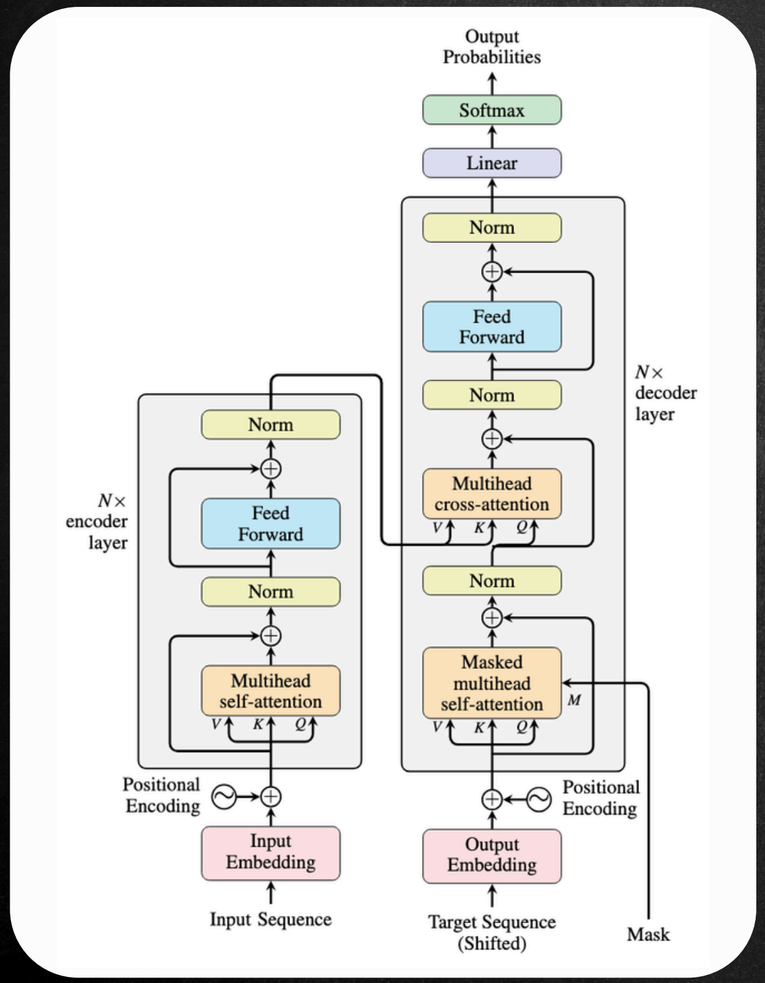

(SDP) scaled dot product → self-Attention → contextual embeddings


single head self-attention

i/p embedd → positional encodig → SDP → contextual embedd

APNA COLLEGE

Attention

Multi-Head Attention

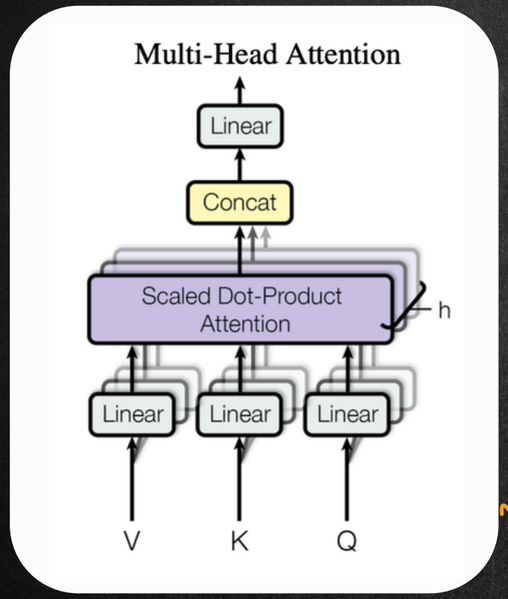

multiple heads

"I like python." → i/p embed → positional modify → AH1 → CE1, AH2 → CE2, AH3 → CE3, ...

grammar


meaning

1. self-attention
2. cross-attention
3. masked attention

APNA COLLEGE

Encoder

Residual Connection

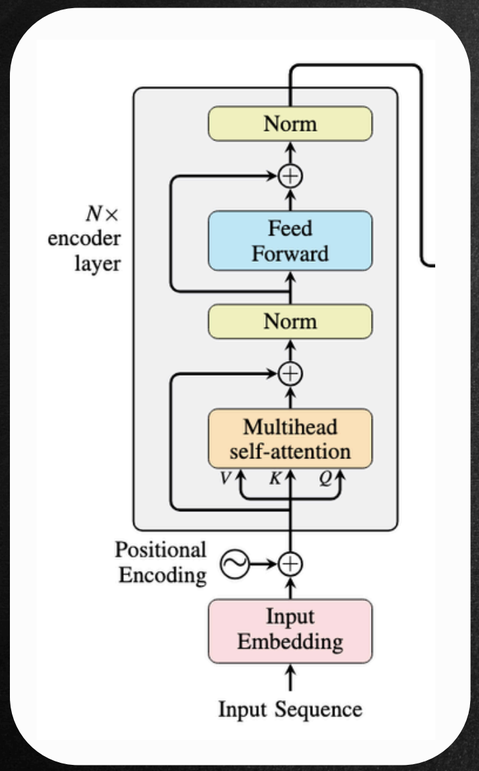

raw inp → directly output connect

Add + Norm


① vanishing gradient

② distorted info. in NN

residual connection

⇓

preserve original

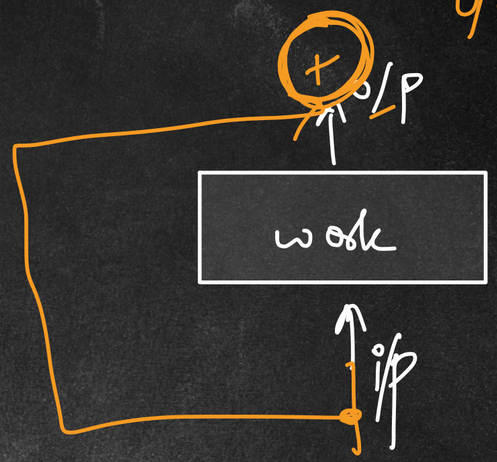

o/p

APNA COLLEGE

Normalization


faster convergence

⇓

stabilize training

Encoder

FNN → adds non-linearity ⇓ " complexity → more enriched understanding

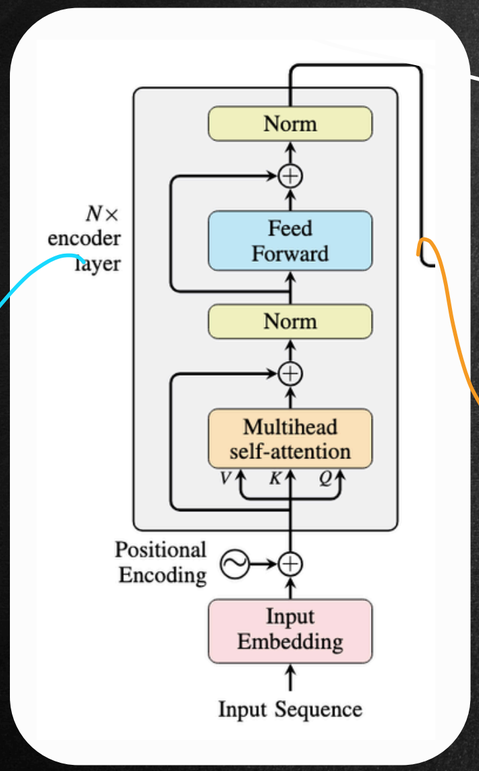

→ contextual embedd.

gpt2 → N = 48

gpt-3 → N = 96

① gather infor.

② think deeply info.

→ imp features ↑↑

→ irrelevant info ↓↓

APNA COLLEGE


Decoder

Cross-Attention

CROSS - ATTENTION

↓

attention btw 2 diff sequences

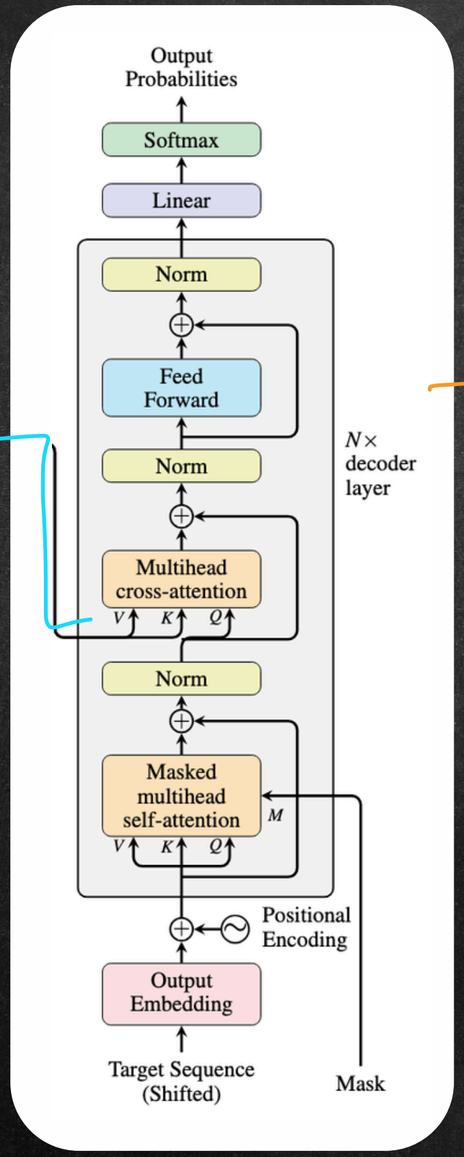

contextual embedding

I → ce1

like → ce2

Python → ce3

" I like Python "

<START>

→ मुझे


Q: next word?

पायथन → 80%

Decoder

Masked Attention

⇒ Apples and oranges are fruits.

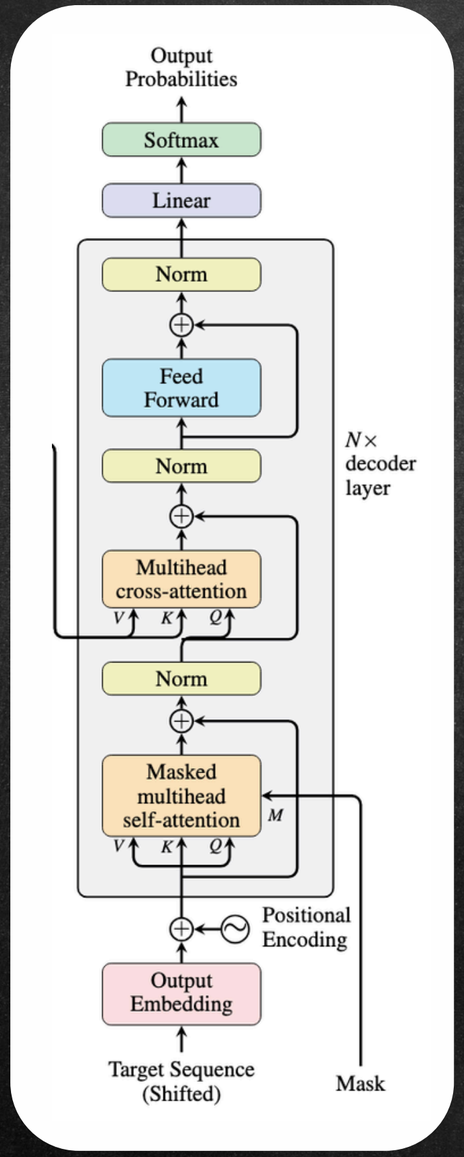


Training ⇒ { multi. head self-attention + mask

cheating ✗

APNA COLLEGE

Transformer

Architecture Summary

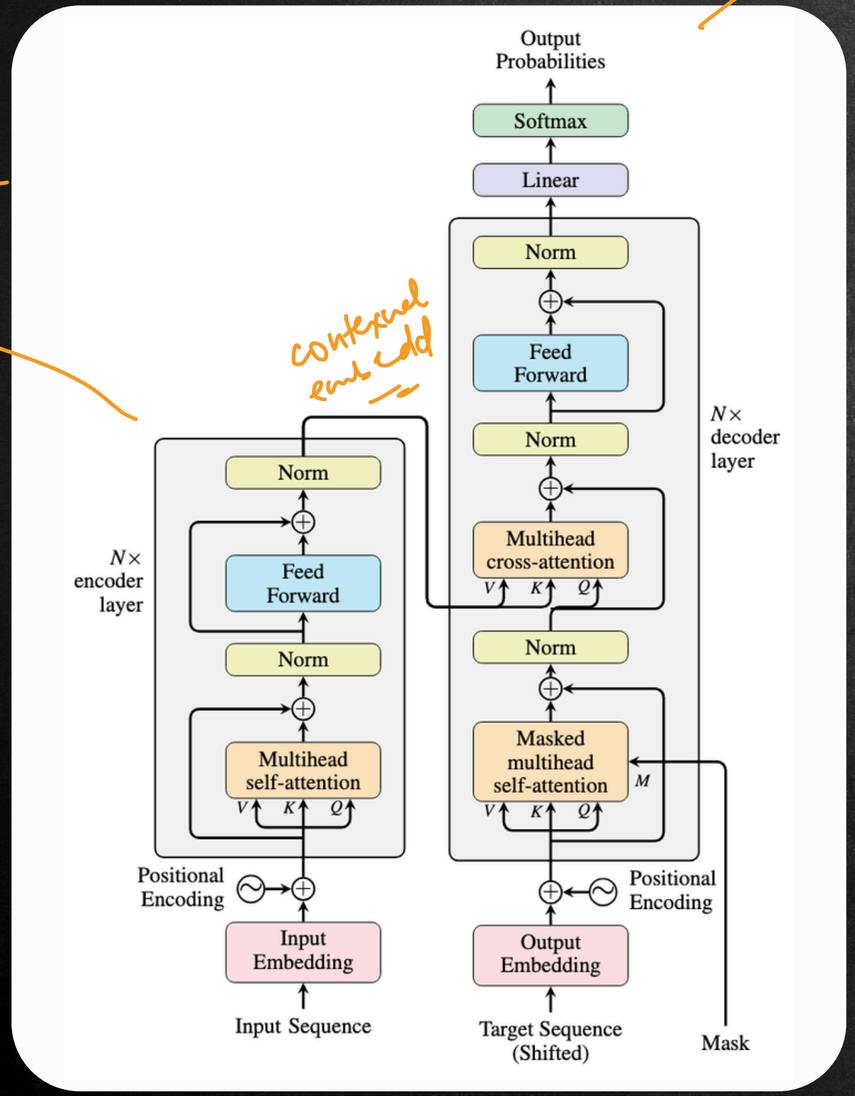

generation word by word

understand

contextual embedding

मुझे पढ़ना है — ?

Q: — पसंद

बुरा — 2%

पसंद — 72%

है — 10%

Pre-trained Transformers

→ BERT
GPT-3
T5
Text to Text Transfer Transformer

APNA COLLEGE

↓ already trained on huge datasets for general tasks

⇓ fine tune

SOTA AI models

self - training

① small dataset → poor generalization ⇒ better generalization
overfitting

② time ↓ → save

③ money ↓ → billions of params

Pre-trained Transformers

APNA COLLEGE

- Hugging Face
- PyTorch Hub
- TensorFlow Hub
- OpenAI APIs etc.