

Step1:create s3 bucket.

Amazon S3 > Buckets > Create bucket

## Create bucket [Info](#)

Buckets are containers for data stored in S3. [Learn more](#)

### General configuration

Bucket name

mybucket1

Bucket names must be globally unique and must not contain spaces or uppercase letters. See [rules for bucket naming](#).

AWS Region

US East (N. Virginia) us-east-1

Copy settings from existing bucket - optional

Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

☐ Block public access to buckets and objects granted through new public bucket or access point policies

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ Block public and cross-account access to buckets and objects through any public bucket or access point policies

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

**Warning**

Turning off block all public access might result in this bucket and the objects within becoming public. AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

### Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

[Add tag](#)

## Default encryption

Automatically encrypt new objects stored in this bucket. [Learn more](#)

Server-side encryption

☒ Disable


☐ Enable

### ► Advanced settings



**Info** After creating the bucket you can upload files and folders to the bucket, and configure additional bucket settings.

[Cancel](#) [Create bucket](#)



Step2:

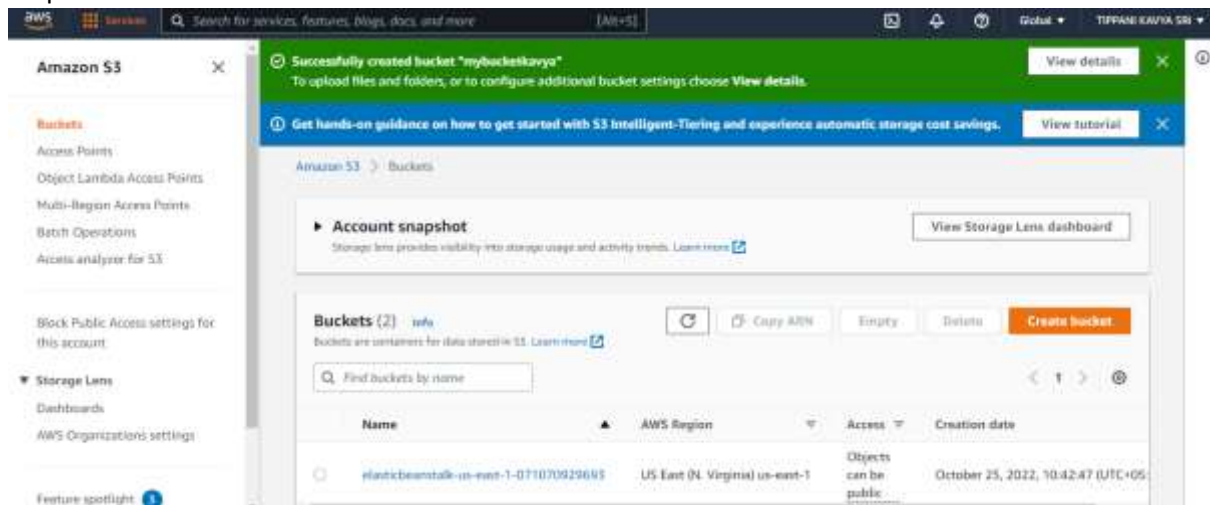

Step3:upload files

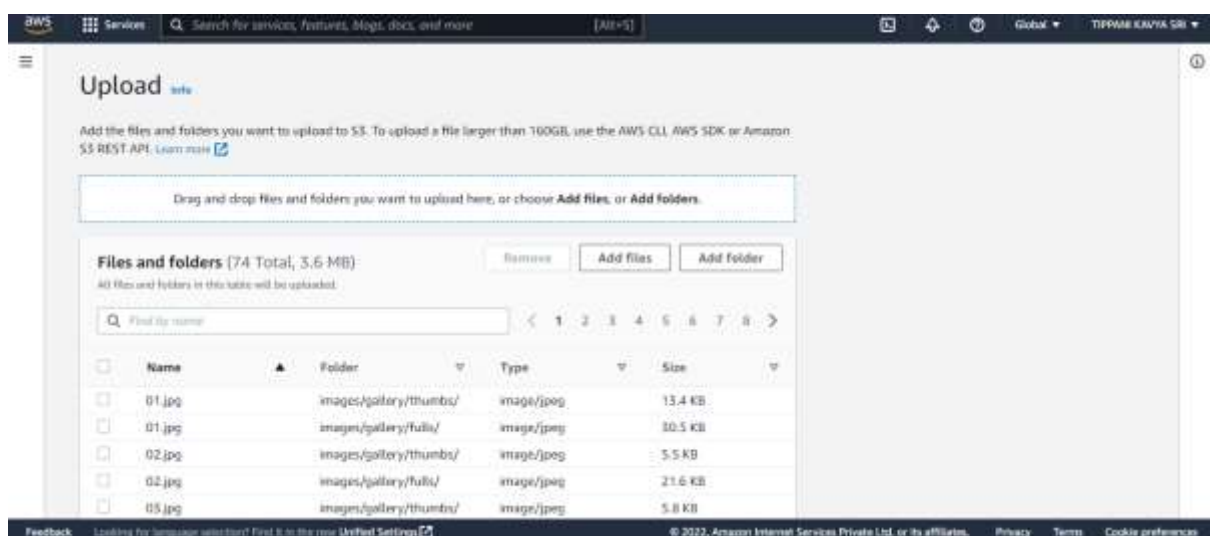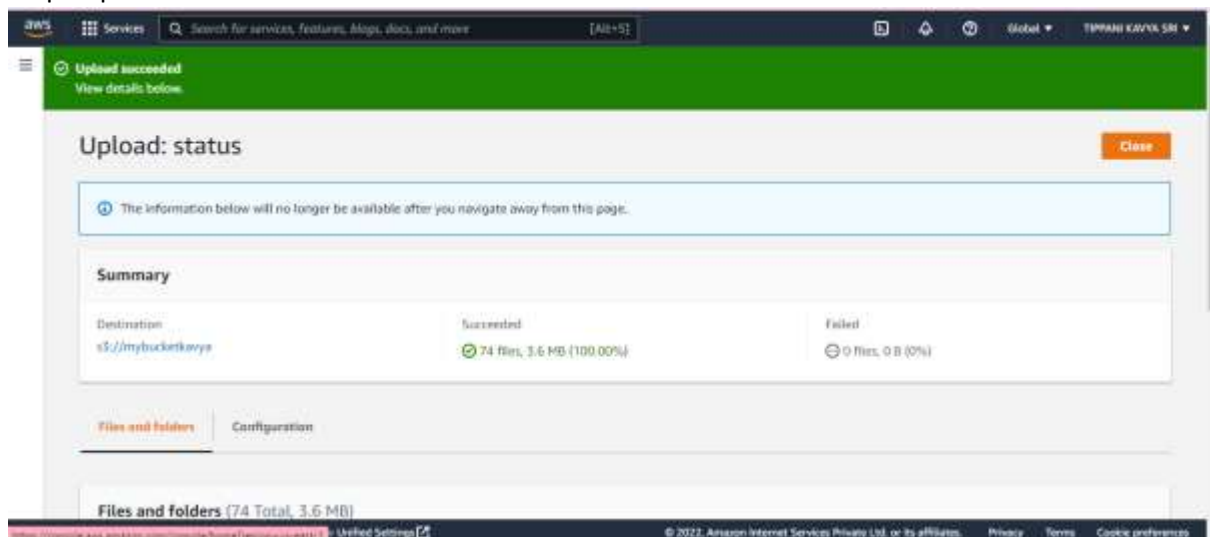


## Step4:edit bucket versioning

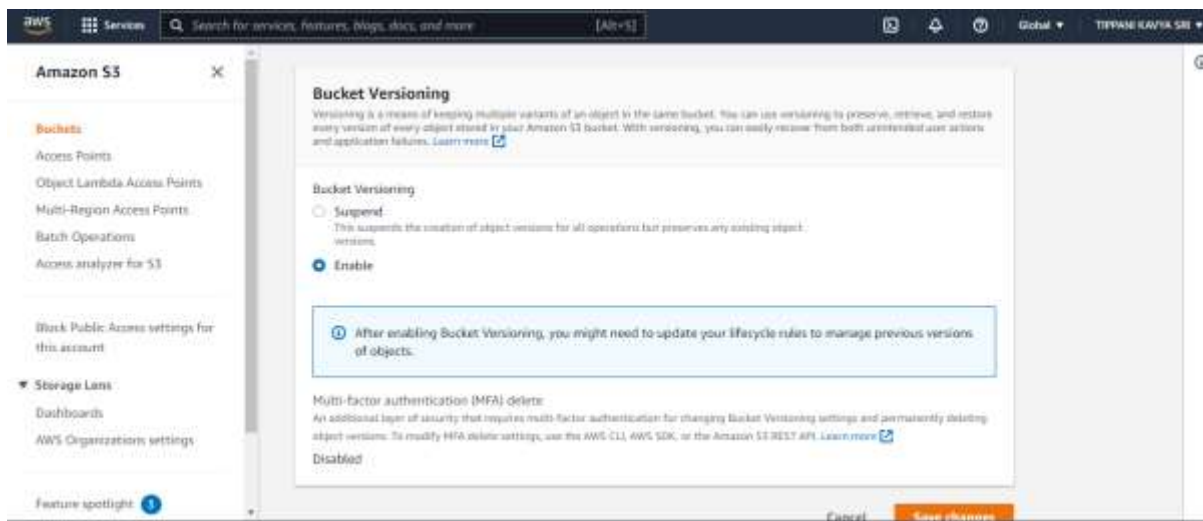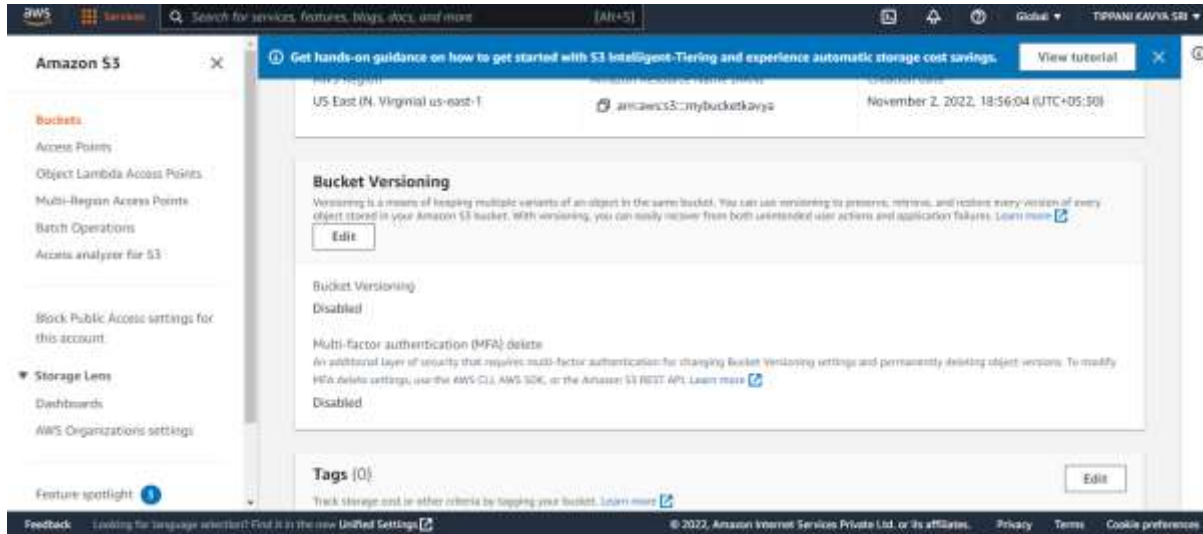



## Step5:after saving changes click on static website hosting click edit



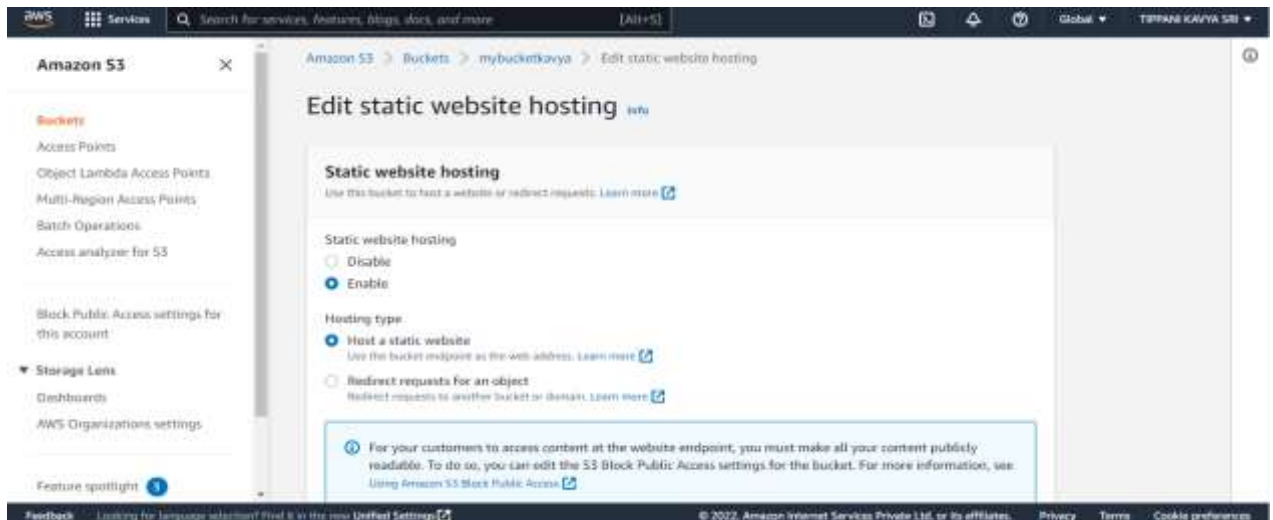


Step6:

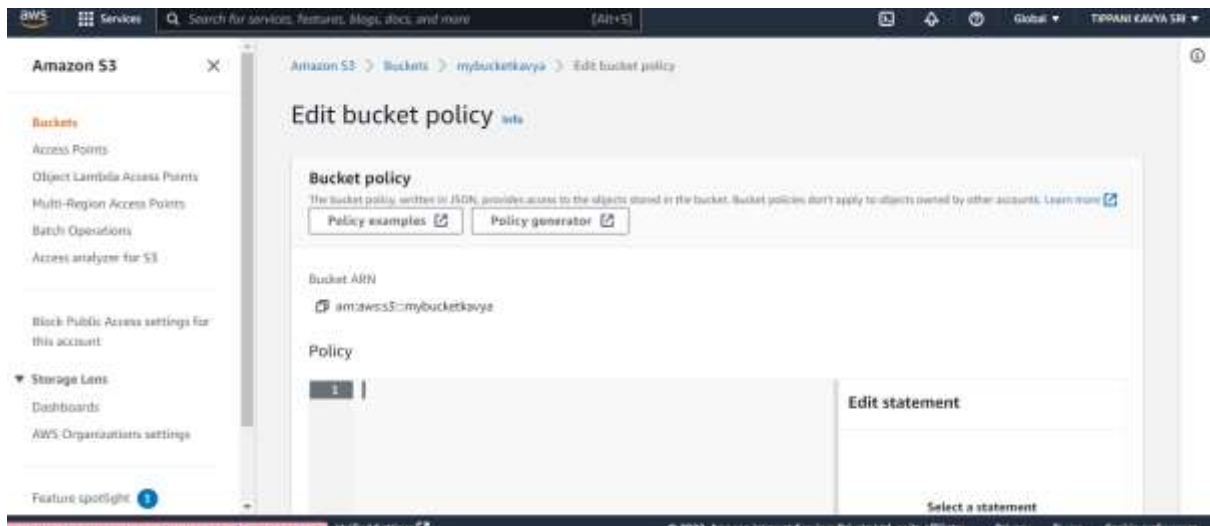

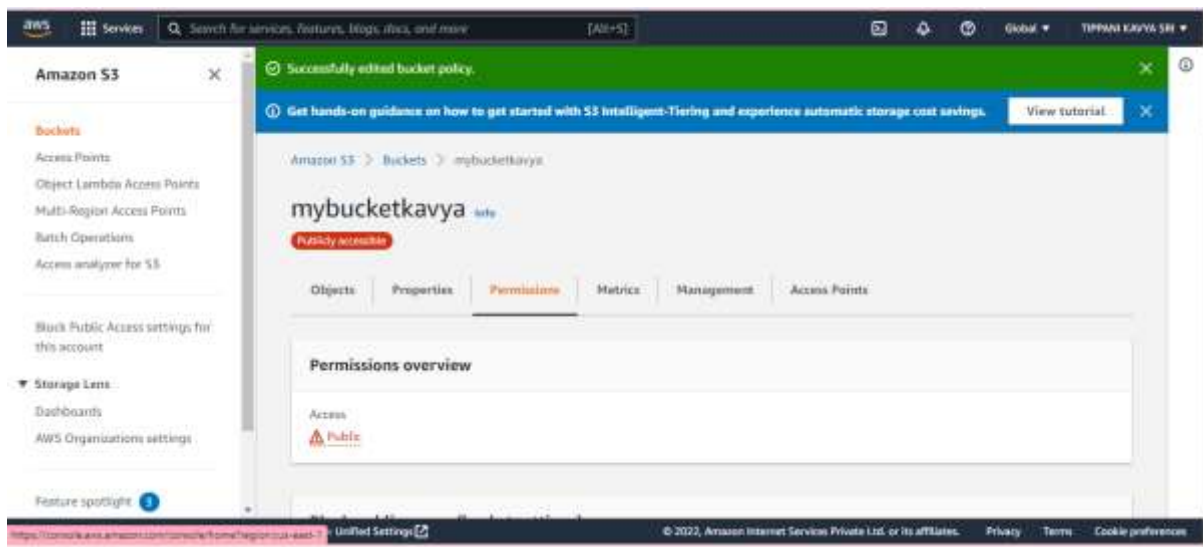

Now copy the last link static website hosting.

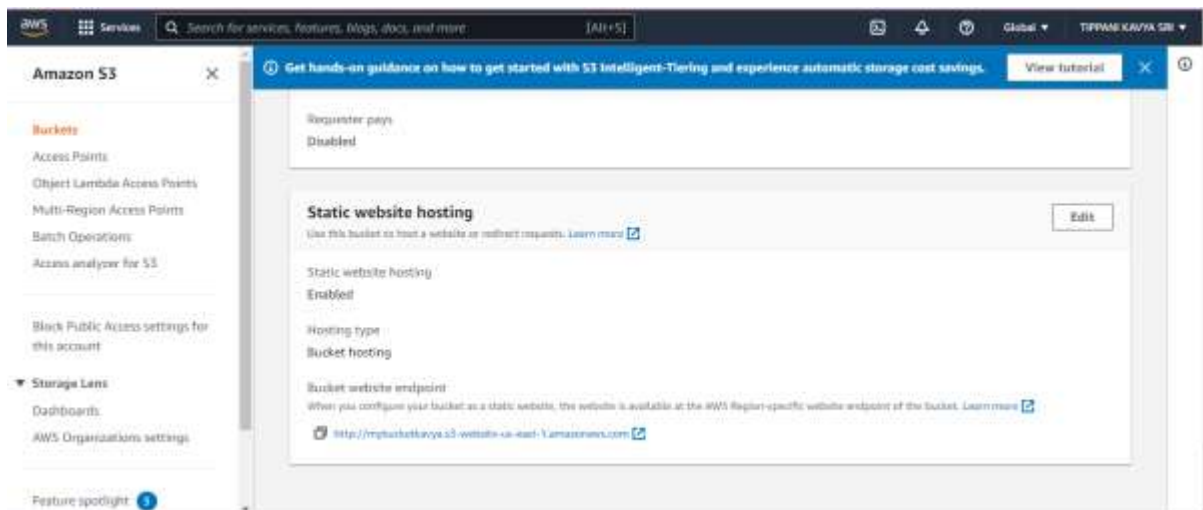

Now our website is created

