
WIL


SIP AND CLOUD

Day 1 – AWS account and learning setup

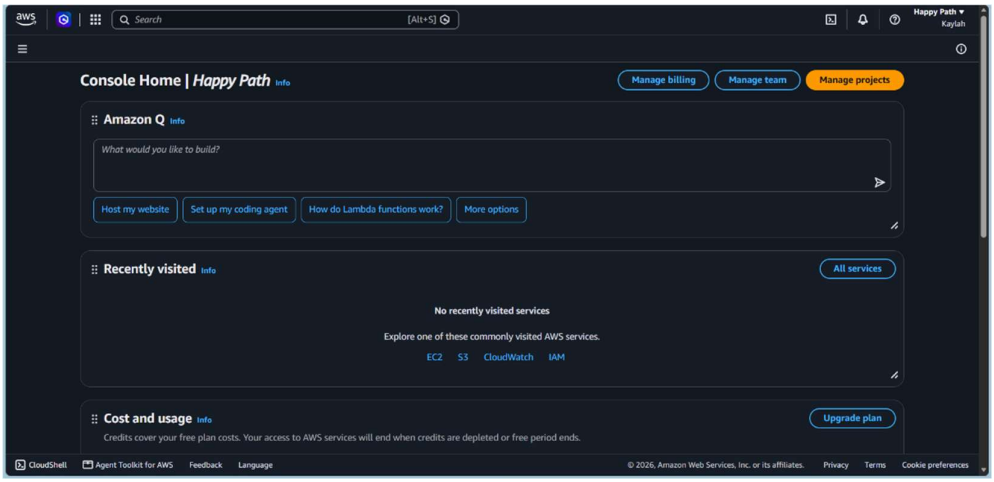


What I did: I accessed the AWS Management Console and explored the dashboard to become familiar with the cloud environment and the services available for the project.

Research: I looked into what cloud computing means and how AWS provides services such as computing, storage, networking and security through an online console.

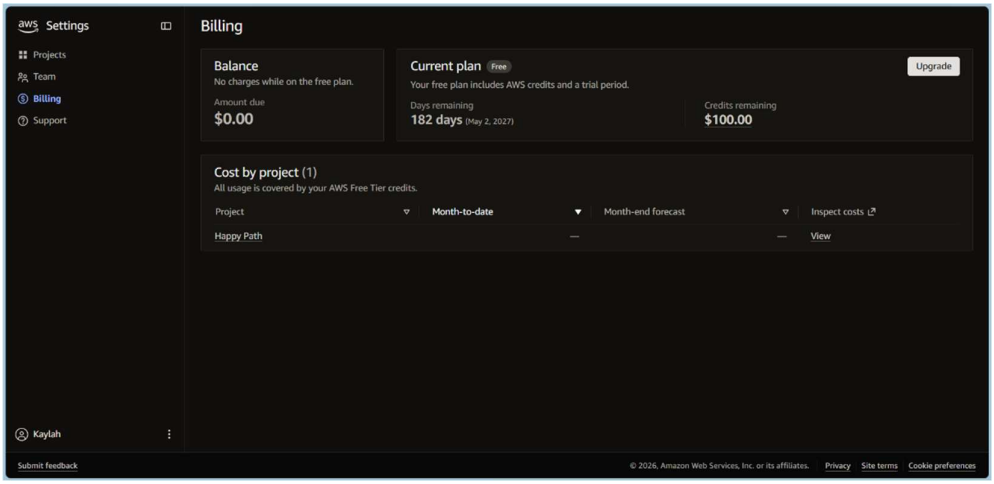


What I did: I opened the AWS billing area and reviewed the account's billing information and cost-management options.

Research: I investigated why cloud costs need to be monitored. AWS charges can depend on the services used, storage, requests and data transfer, so checking billing regularly helps avoid unexpected expenses.

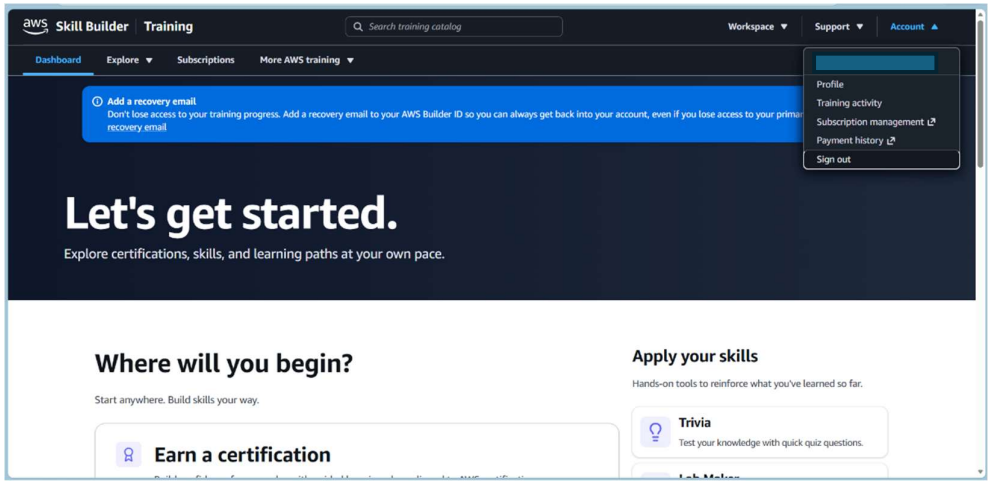


What I did: I accessed AWS Skill Builder and explored the learning dashboard and available AWS training resources.

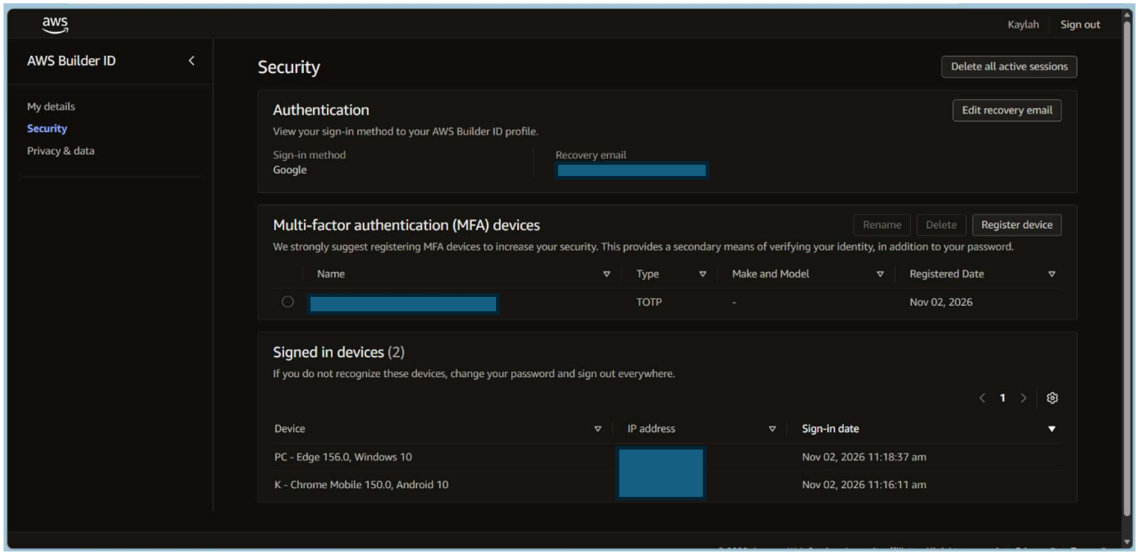


What I did: I reviewed the security settings and the registered multi-factor authentication method shown in the account security page and I enables MFA.

Research: MFA adds another verification step beyond a password. It reduces the risk of unauthorised access if a password is exposed. I also learned that the root account should be protected carefully and not used for everyday administration.

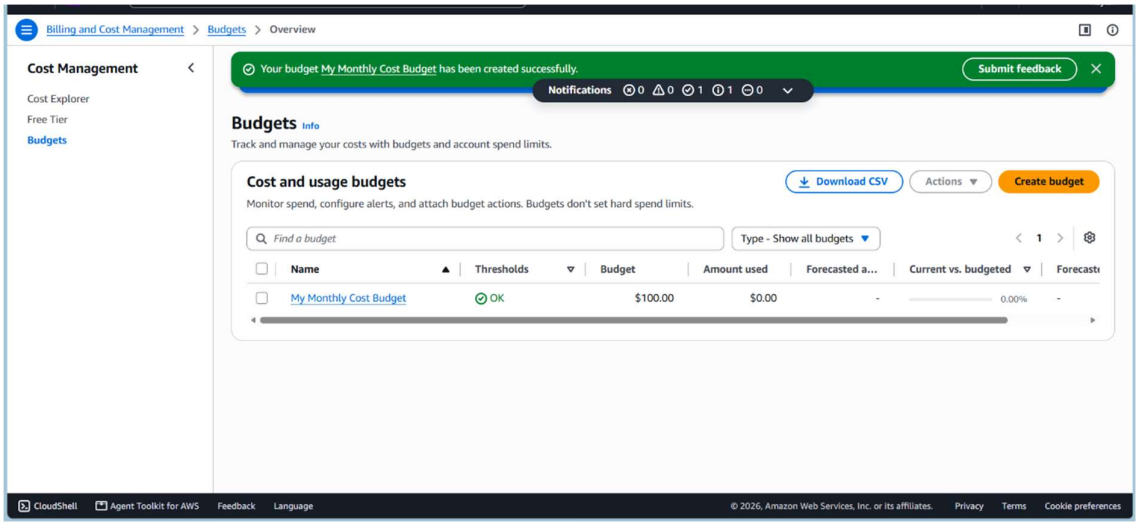


What I did: I created an AWS budget and checked the confirmation shown after the budget was saved. Research: AWS Budgets can track actual or forecast costs against a spending limit and send notifications when thresholds are reached. A budget alert is a warning mechanism; it does not automatically stop resources or charges.

Day 2 – Amazon S3 bucket setup

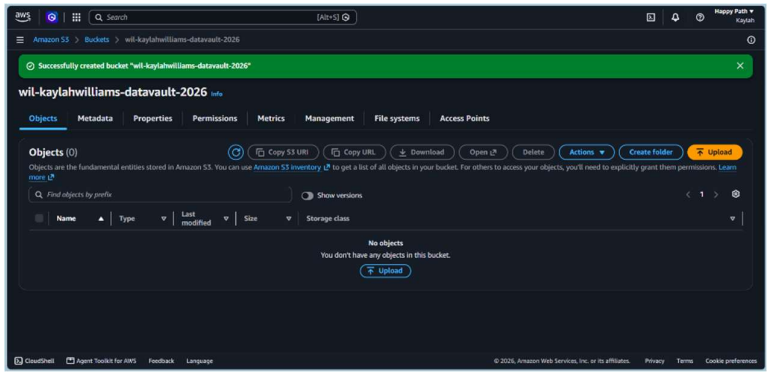


What I did: I created the S3 bucket for the WIL project and opened the bucket in the AWS console to check that it was available.

Research: Amazon S3 is object storage. Data is stored as objects inside buckets, and each object has a key (name) that identifies it within the bucket.

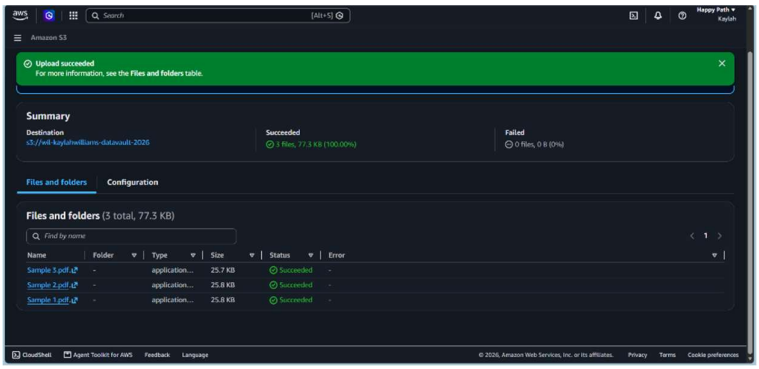


What I did: I uploaded sample files to the bucket and checked that the objects appeared in the Objects list.


Research: I learned that object storage is useful for files such as documents, images and backups. Access permissions and encryption should be considered when storing data in a cloud bucket.

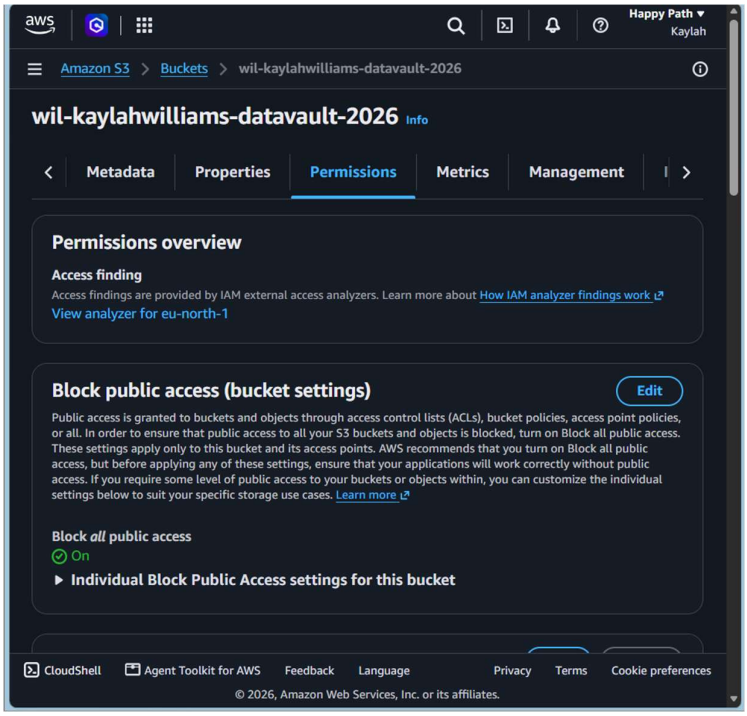

What I did: I opened the bucket permissions and reviewed the Block Public Access settings shown for the bucket.

Research: S3 Block Public Access provides safeguards against accidentally making buckets or objects public. Keeping these settings enabled is an important step when the bucket is intended for private project data.

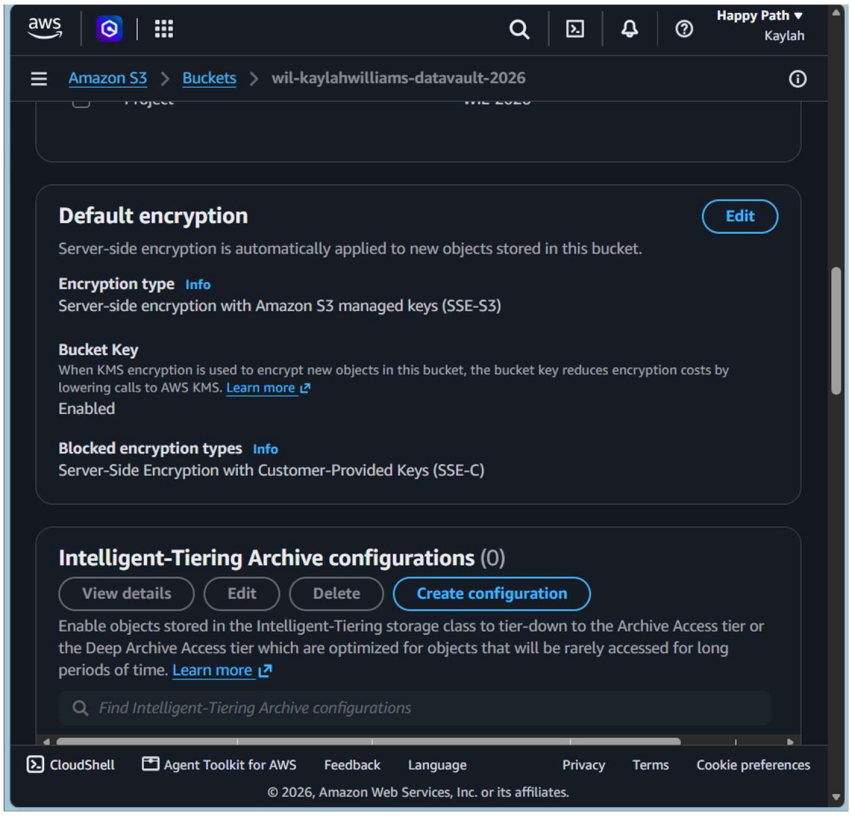


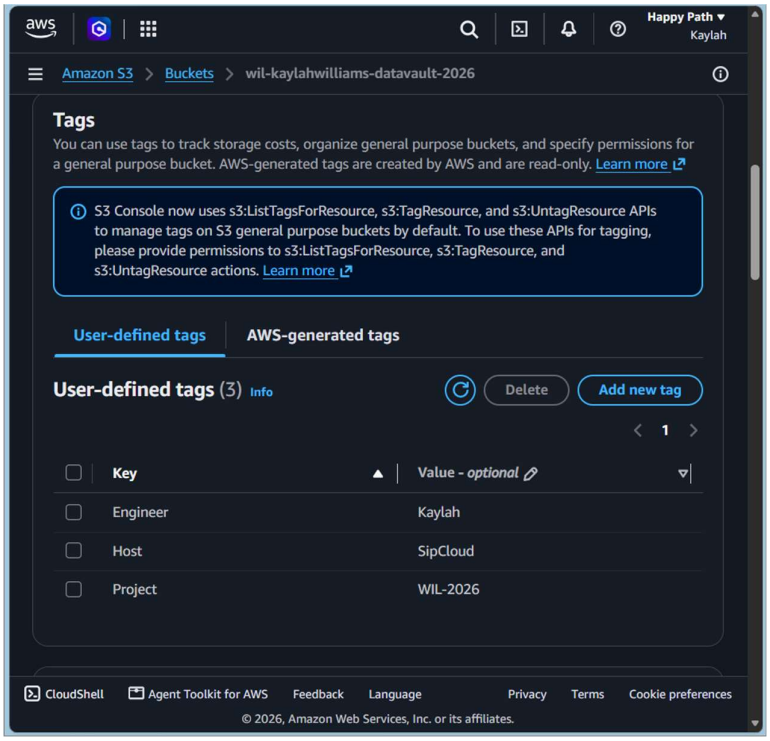

What I did: I opened the bucket tagging section and reviewed the project tags configured for the bucket.

Research: Tags are key-value labels used to organise AWS resources. They can help identify project ownership, group resources and support cost allocation and administration.


Day 3 – S3 version history

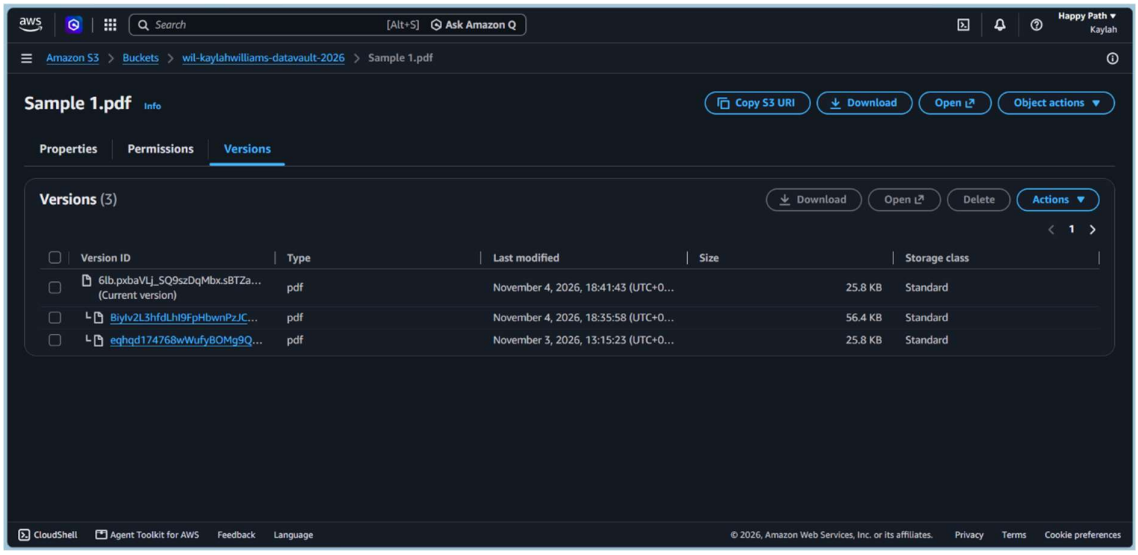

What I did: I opened the object's Versions view and reviewed the different versions listed for the same S3 object.

Research: S3 Versioning stores multiple versions of an object in one bucket. It can help recover from accidental overwrites or deletions by retaining earlier versions. This screenshot demonstrates version history; it does not alone prove that a previous version was restored successfully.

Day 4 – Security Group evidence

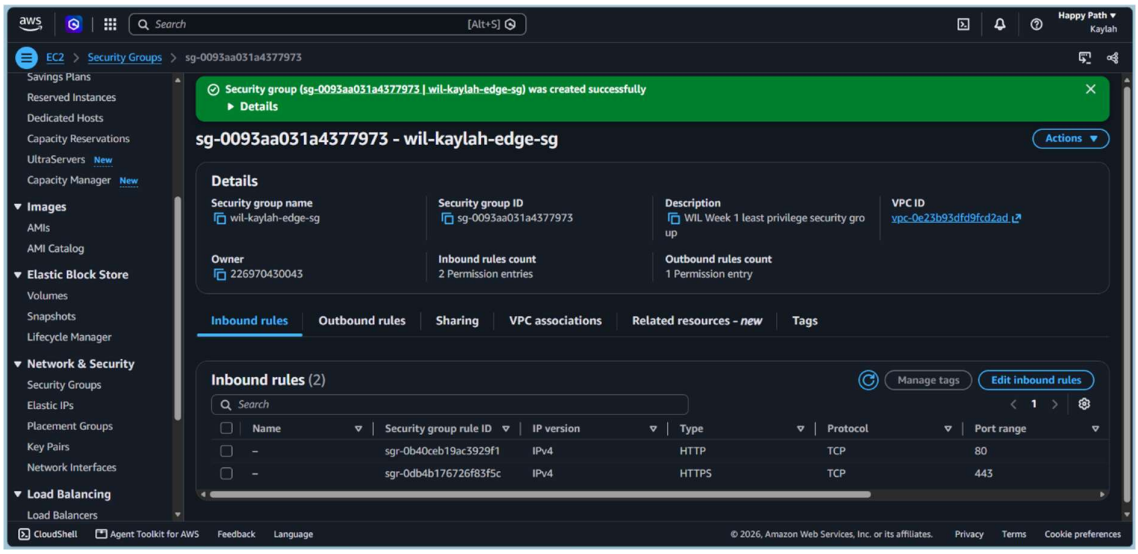

I created the project Security Group and reviewed its inbound rules to control which network traffic can reach the associated AWS resources. I checked the source addresses and ports and made sure SSH and RDP were not open to 0.0.0.0/0.


Research: A Security Group acts as a virtual firewall for supported AWS resources. Its rules control allowed inbound and outbound traffic. Restricting source IP ranges and opening only necessary ports follows the principle of least privilege and reduces unnecessary exposure.


DAY 5

Feature	Security Group	Network ACL (NACL)
Level	Resource/instance level	Subnet level
Purpose	Controls traffic to and from associated resources	Controls traffic entering and leaving a subnet
Rules	Allow rules	Allow and deny rules
State	Stateful	Stateless
Return traffic	Response traffic for an allowed connection is automatically permitted	Return traffic must be allowed by the relevant rules
Evaluation	All applicable rules are evaluated	Rules are evaluated in numerical order

Stateful: the Security Group tracks permitted connections and automatically allows corresponding response traffic.

Stateless: a NACL does not track connections, so the rules must account for return traffic too.

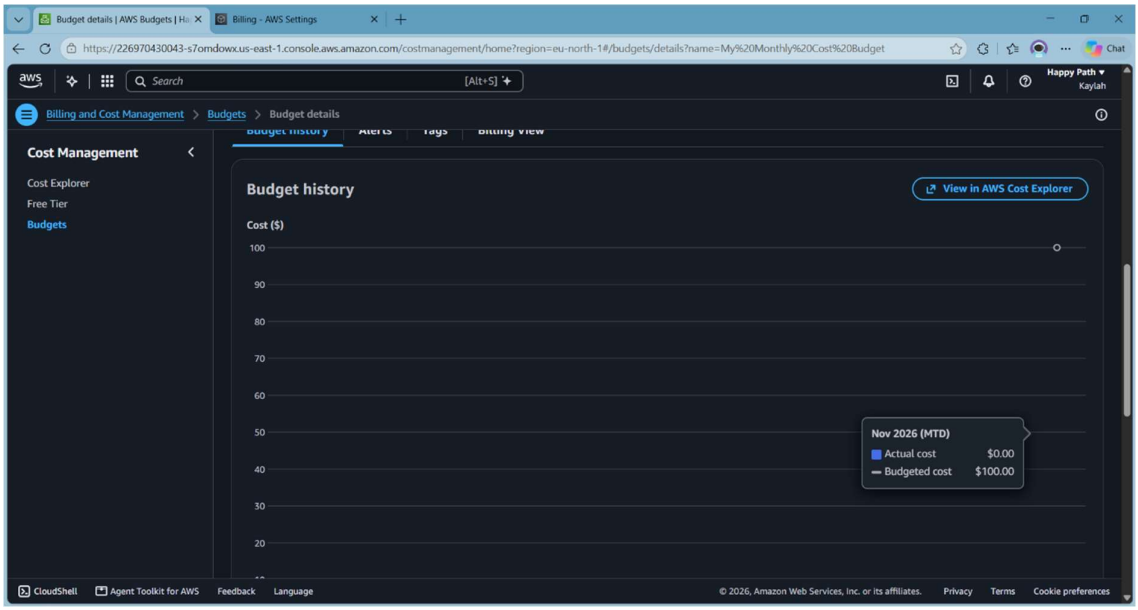

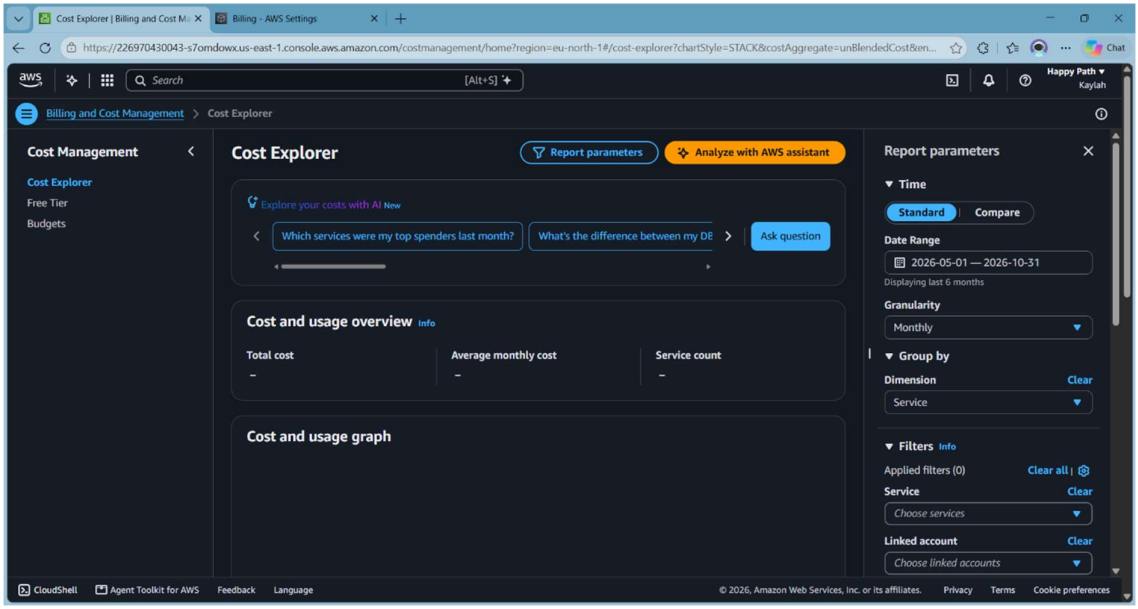
Cost Explorer | Billing and Cost M
Billing - AWS Settings
https://226970430043-s7omdowx.us-east-1.console.aws.amazon.com/costmanagement/home?region=eu-north-1#/cost-explorer?chartStyle=STACK&costAggregate=unBlendedCost&en...
Chat
Search
[Alt+S]
Happy Path
Kaylah
Billing and Cost Management
Cost Explorer
Cost Management
Cost Explorer
Free Tier
Budgets
Cost Explorer
Report parameters
Analyze with AWS assistant
Explore your costs with AI New
Which services were my top spenders last month?
What's the difference between my DE
Ask question
Cost and usage overview Info
Total cost
-
Average monthly cost
-
Service count
-
Cost and usage graph
Report parameters
Time
Standard
Compare
Date Range
2026-05-01 — 2026-10-31
Displaying last 6 months
Granularity
Monthly
Group by
Dimension
Clear
Service
Filters Info
Applied filters (0)
Clear all
Service
Clear
Choose services
Linked account
Clear
Choose linked accounts
CloudShell
Agent Toolkit for AWS
Feedback
Language
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences