RECEIPT LENS

Scanned Receipt OCR Information Extraction

RECEIPT LENS · EVALUATION FIELD LOG

Keep the implementation intact; spend the work on label validity, frozen comparisons, and paired per-image evidence.

TEAM

PARADOX

Sameer Karn · Shreyas K. · Dhrub Agarwal · Sudipta Saha · Utkarsh Shandilya · Shubham Choudhary

upGrad School of Technology

The project risk is measurement, not missing code

01

Audit first

Audit **data.py, metrics.py, and prompts.py** against the real SROIE labels before the first GPU run.

02

Stage the run

Run a small staged sequence that shares one frozen evaluation.

03

Report change

Report what changed on each image and field, not one headline accuracy.

02 · TARGET CONTRACT

Normalize the target contract before scoring

A score is only as stable as the strings it compares.

Dates

25/12/2018 · 05 MAR 2018 · 2018-03-23 · 20180304 · 12/28/2017

Totals

9.00 · $8.20 · RM 3.90

Recommended default: ISO dates and decimal totals.
Record date order and currency; flag ambiguous dates.
Never count day/month swaps without evidence.



AUDIT THE TARGET STRINGS BEFORE THE METRIC SEES THEM.

Quarantine label noise before it becomes a score

01 Score two ways


Report strict exact match plus fuzzy character similarity for company and address.

02 Check

Exclude missing labels only for that field; report counts; keep other valid annotations.

03 Log, don’t fix

Keep “TED HENG” for TEO HENG and truncated addresses in the audit log, not as silent corrections.

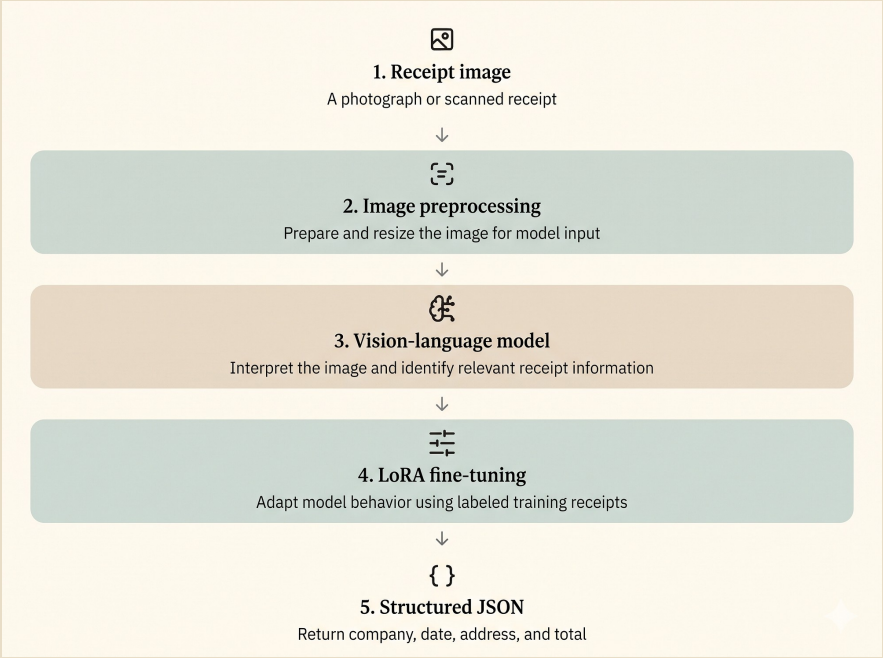

Split by merchant, not just by row

A random row split can reward repetition instead of generalization.

01

Input

Receipt rows from SROIE

02

Deduplicate

Flag repeated images with hashes; review near matches

03

Shuffle

Seeded random shuffle for reproducibility

04

Holdout

Reserve new merchants for separate validation

05

Evaluate

Report test metrics: seen vs unseen merchants

THE TEST QUESTION: WHAT HAPPENS ON MERCHANTS SEEN VERSUS UNSEEN DURING TRAINING?

Merchant repetition and duplicate receipts can make a random validation split look stronger than it is.

Resize policy is a first-class ablation

Observed

Widths span roughly 436 px to nearly 5,000 px, including A4 scans 792×2748 receipt by at 2481×3508 and very tall receipts at 792×2748.

Cap

A 960 px max-edge cap shrinks about 0.35×; the README fallback to 768 is harsher.

Decide

Ablate the resize rule on validation. Consider an area budget instead of an edge cap



Stage the work so every run answers one question

1

CPU

Audit

Read the three core modules; run pytest and smoke.

2

T4

Smoke

A few steps on about 5 images; confirm adapter save/reload, parseable output, and VRAM fit.

3

BASELINES

Baseline

Plain model on validation; earlier 30 receipts form a pilot, not an untouched test.

4

VALIDATION

E1–E4

Select on validation; leave fresh test receipts unused.

5


FINAL

Ship

Freeze one config; test on fresh unseen images once; report larger test results.

Freeze the evaluator before comparing adapters

Frozen component	Rule
Evaluator	Use one parser, one normalization policy, one split definition, and one decoding policy across baseline and fine-tuned runs.
Invalid output	Count invalid or truncated JSON as a miss and report the invalid/truncated rate separately.
Test records	Audit 14 added annotations; document their provenance and whether they are included in reported results.
Locked test	Prior 30 are pilot data; reserve a separate fresh test set.

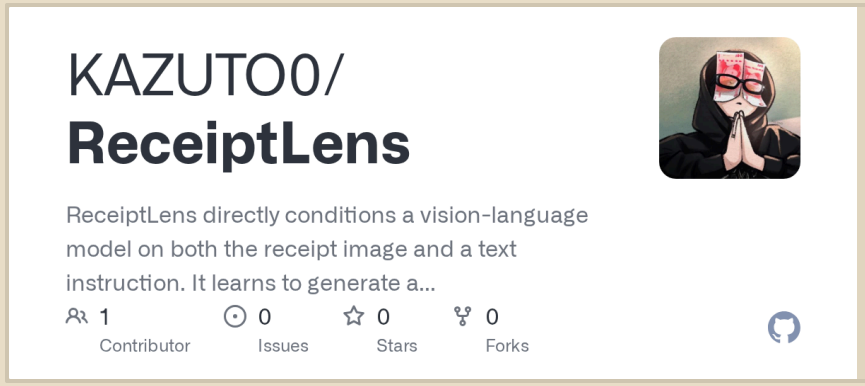

GitHub

GitHub – KAZUTO0/ReceiptLens: ReceiptLens directly conditions a vision–l...

ReceiptLens directly conditions a vision–language model on both the receipt image and a text instruction. It learns to generate a structured response instead of first requiring a...

08 · EXPERIMENT MATRIX

Make the experiment matrix small and interpretable

Run	Change	Budget	Question
E1	Defaults	r=8, 40 steps	Does the scaffold run?
E2	More training	Three passes, 120 steps	Does more exposure help?
E3	Higher rank	Rank r=16	Does capacity change the result?
E4	Resize policy	Validation ablation	Does preprocessing change the read?

The default 40 steps at batch 1×4 equal 160 samples, one pass over the training set: a reasonable smoke run, not a strong final run.

09 · PAIRED REPORTING

Report paired wins and losses, not one accuracy number

Fixed

Wrong before, right after.

Broken


Right before, wrong after.

Both right

No change.

Both wrong

No change.

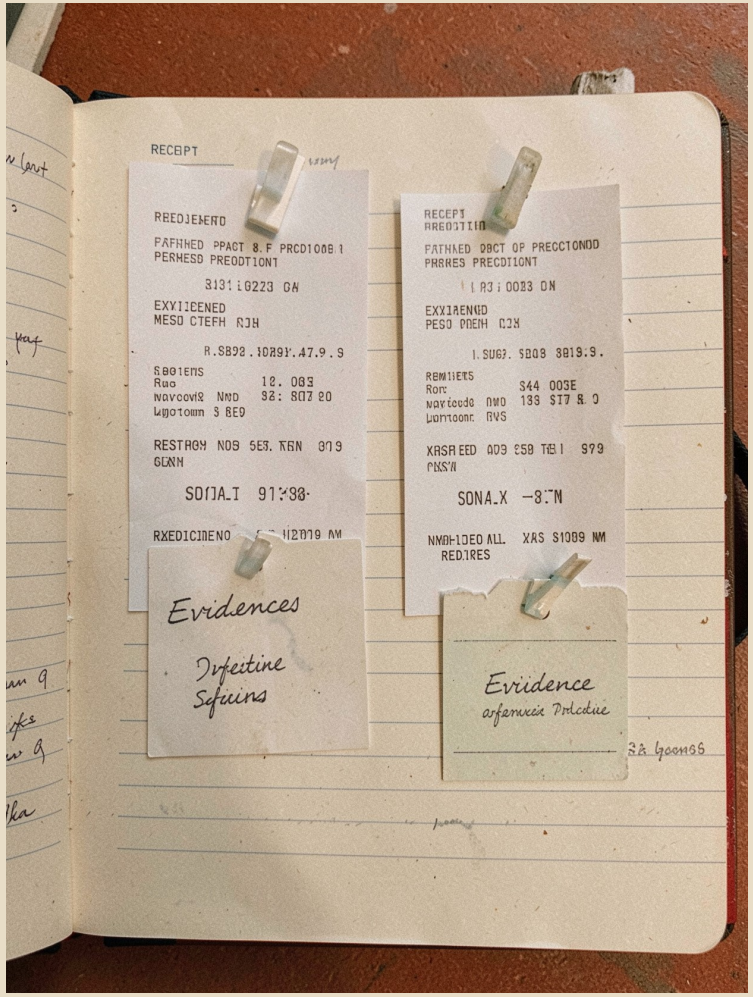

OBSERVED: JSON AND SCHEMA WERE 100 PERCENT IN BOTH MODELS. FOCUS ON FIELD ERRORS AND PAIRED GAINS OR REGRESSIONS.