



DBT SELF LEARNING

GROUP BY PROBLEMS


1)

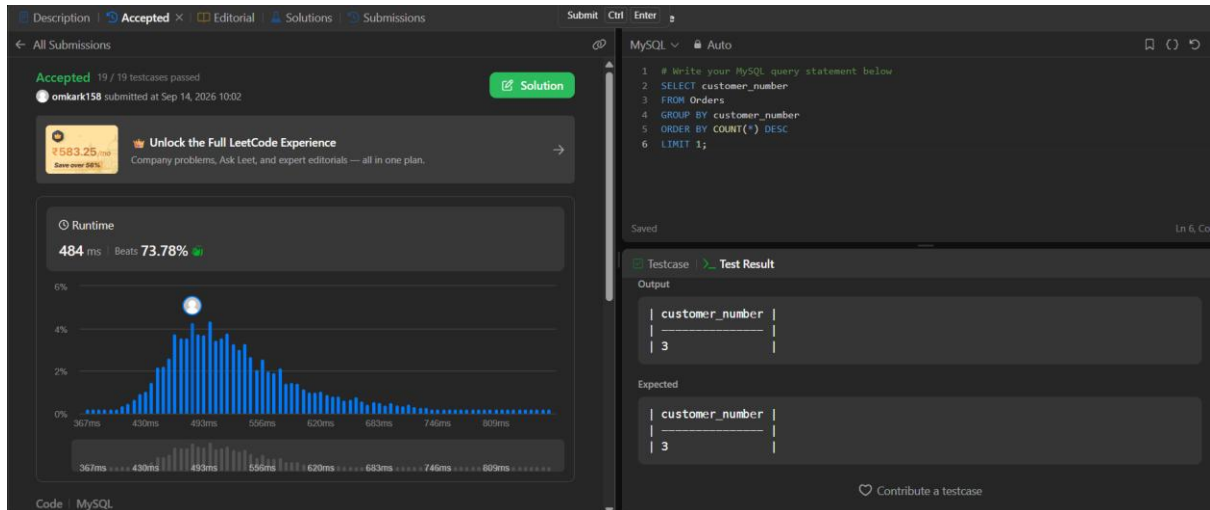

2)

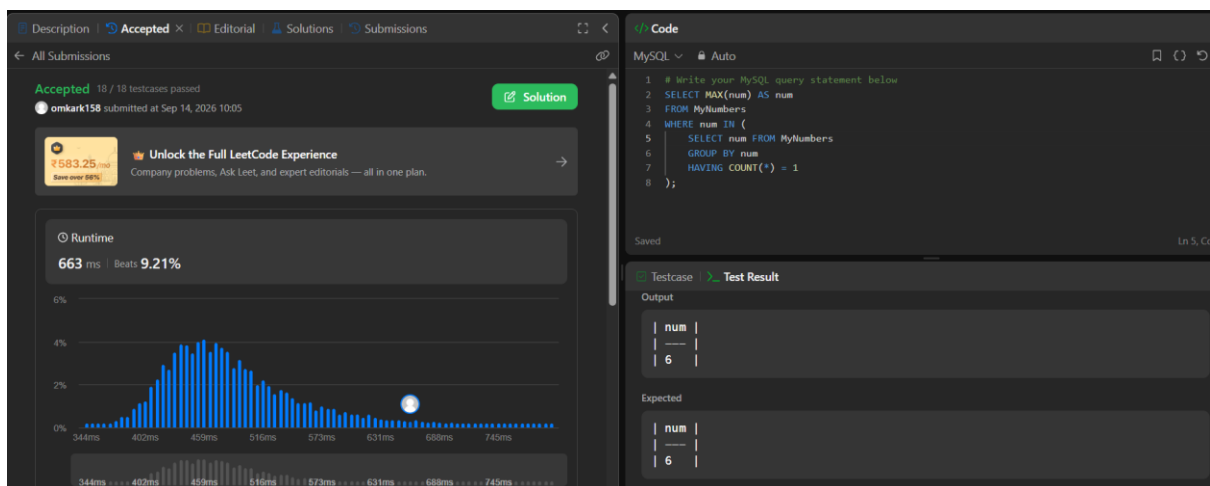

3)

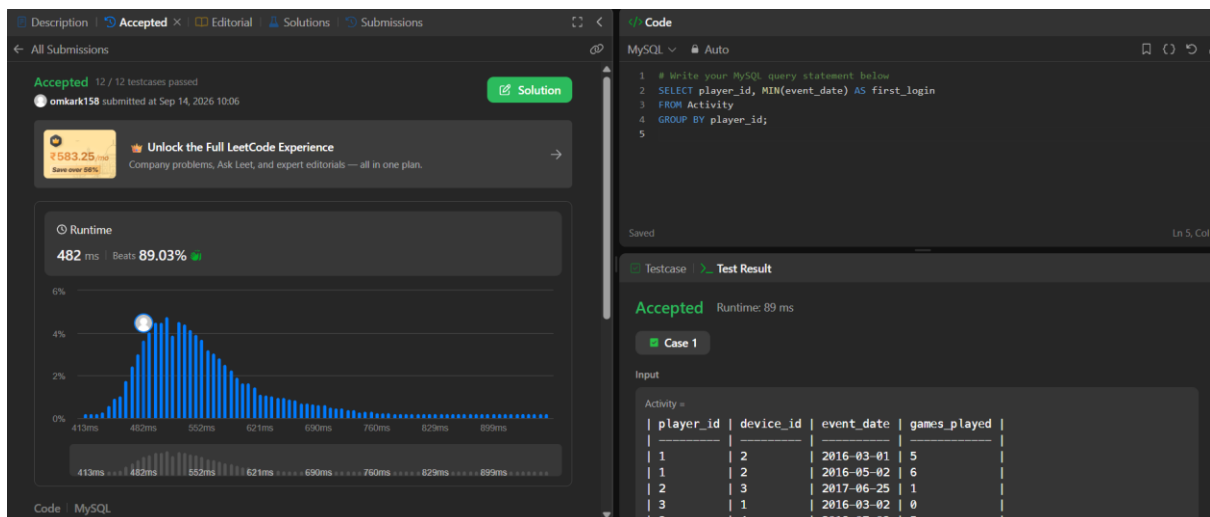

4)

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 22 / 22 testcases passed

ommark158 submitted at Sep 14, 2026 10:09

1583.25ms

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

562 ms | Beats 75.74%

440ms

523ms

597ms

672ms

746ms

821ms

895ms

970ms

Code MySQL

Code

MySQL

Auto

```

1 # Write your MySQL query statement below
2 SELECT
3     date_id, make_name,
4     COUNT(DISTINCT lead_id) AS unique_leads,
5     COUNT(DISTINCT partner_id) AS unique_partners
6 FROM DailySales
7 GROUP BY date_id, make_name;

```

Saved

Ln 7, Col 1

Testcase

Test Result

Accepted Runtime: 70 ms

Case 1

Input

DailySales =

date_id	make_name	lead_id	partner_id
2020-12-8	toyota	0	1
2020-12-8	toyota	1	0
2020-12-8	toyota	1	2
2020-12-7	toyota	0	2

5)

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 22 / 22 testcases passed

ommark158 submitted at Sep 14, 2026 10:11

1583.25ms

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

591 ms | Beats 53.72%

410ms

432ms

567ms

641ms

715ms

789ms

864ms

930ms

Code MySQL

Code

MySQL

Auto

```

1 SELECT emp_id, event_day AS day, SUM(out_time - in_time) AS total_time
2 FROM Employees
3 GROUP BY emp_id, event_day;
4

```

Saved

Ln 3, Col 1

Testcase

Test Result

Accepted Runtime: 96 ms

Case 1

Input

Employees =

emp_id	event_day	in_time	out_time
1	2020-11-28	4	32
1	2020-11-28	55	200
1	2020-12-3	1	42

6)

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 12 / 12 testcases passed

ommark158 submitted at Sep 14, 2026 10:12

1583.25ms

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

353 ms | Beats 93.00%

296ms

344ms

393ms

441ms

490ms

538ms

587ms

635ms

Code MySQL

Code

MySQL

Auto

```

1 # Write your MySQL query statement below
2 SELECT actor_id, director_id
3 FROM ActorDirector
4 GROUP BY actor_id, director_id
5 HAVING COUNT(*) >= 3;

```

Saved

Ln 5, Col 1

Testcase

Test Result

Accepted Runtime: 66 ms

Case 1

Input

ActorDirector =

actor_id	director_id	timestamp
1	1	0
1	1	1
1	1	2
1	2	3
1	2	4

7)

Description
Accepted
Editorial
Solutions
Submissions

All Submissions

Accepted 24 / 24 testcases passed
omark158 submitted at Sep 14, 2026 10:17

Solution

\$583.25
Save over 98%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
601 ms | Beats 95.42%

Code - MySQL

MySQL
Auto

```

1 # Write your MySQL query statement below
2 SELECT user_id, MAX(time_stamp) AS last_stamp
3 FROM Logins
4 WHERE YEAR(time_stamp) = 2020
5 GROUP BY user_id;
6

```

Saved
Ln 6, Col 1

Testcase
Test Result

Accepted Runtime: 106 ms

Case 1

Input

```

Logins =
| user_id | time_stamp |
|-----|-----|
| 6       | 2020-06-30 15:06:07 |
| 6       | 2021-04-21 14:06:06 |
| 6       | 2019-03-07 00:13:15 |
| 8       | 2020-02-01 05:10:53 |

```

8)

Description
Accepted
Editorial
Solutions
Submissions

All Submissions

Accepted 13 / 13 testcases passed
omark158 submitted at Sep 14, 2026 10:19

Solution

\$583.25
Save over 98%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
328 ms | Beats 98.73%

Code - MySQL

MySQL
Auto

```

1 # Write your MySQL query statement below
2 SELECT
3   query_name,
4   ROUND(AVG(rating / position), 2) AS quality,
5   ROUND(AVG(rating < 3) * 100, 2) AS poor_query_percentage
6 FROM Queries
7 GROUP BY query_name;

```

Saved
Ln 7, Col 1

Testcase
Test Result

Accepted Runtime: 69 ms

Case 1

Input

```

Queries =
| query_name | result | position | rating |
|-----|-----|-----|-----|
| Dog        | Golden Retriever | 1 | 5 |
| Dog        | German Shepherd | 2 | 5 |
| Dog        | Mule | 200 | 1 |
| Cat        | Shirazi | 5 | 2 |

```

9)

Description
Accepted
Editorial
Solutions
Submissions

All Submissions

Accepted 17 / 17 testcases passed
omark158 submitted at Sep 14, 2026 10:21

Solution

\$583.25
Save over 98%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
536 ms | Beats 57.45%

Code - MySQL

MySQL
Auto

```

1 # Write your MySQL query statement below
2 SELECT activity_date AS day,
3        COUNT(DISTINCT user_id) AS active_users
4 FROM Activity
5 WHERE activity_date BETWEEN '2019-06-28' AND '2019-07-27'
6 GROUP BY activity_date;

```

Saved
Ln 6, Col 1

Testcase
Test Result

Accepted Runtime: 123 ms

Case 1

Input

```

Activity =
| user_id | session_id | activity_date | activity_type |
|-----|-----|-----|-----|
| 1       | 1          | 2019-07-20   | open_session |
| 1       | 1          | 2019-07-20   | scroll_down   |
| 1       | 1          | 2019-07-20   | end_session  |
| 2       | 4          | 2019-07-20   | open_session |

```

10)

Accepted
11 / 11 testcases passed
omark158 submitted at Sep 14, 2026 10:22
Solution

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
306 ms | Beats 96.37%

Code
MySQL
1 # Write your MySQL query statement below
2 SELECT class
3 FROM Courses
4 GROUP BY class
5 HAVING COUNT(student) >= 5;

Testcase
Test Result
Accepted Runtime: 88 ms
Case 1
Input
Courses =

student	class
A	Math
B	English
C	Math
D	Biology

JOIN PROBLEMS

1)

Accepted
25 / 25 testcases passed
omark158 submitted at Sep 14, 2026 10:40
Solution

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
1438 ms | Beats 38.75%

Code
MySQL
1 # Write your MySQL query statement below
2 SELECT eu.unique_id, e.name
3 FROM Employees e
4 LEFT JOIN EmployeeUNI eu
5 ON e.id = eu.id;

Testcase
Test Result
Accepted Runtime: 89 ms
Case 1
Input
Employees =

id	name
1	Alice
7	Bob
11	Meir
90	Winston

2)

Accepted
13 / 13 testcases passed
omark158 submitted at Sep 14, 2026 10:41
Solution

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
384 ms | Beats 68.74%

Code
MySQL
1 # Write your MySQL query statement below
2 SELECT
3 query_name,
4 ROUND(AVG(rating / position), 2) AS quality,
5 ROUND(AVG(rating < 3) * 100, 2) AS poor_query_percentage
6 FROM Queries
7 GROUP BY query_name;

Testcase
Test Result
Accepted Runtime: 73 ms
Case 1
Input
Queries =

query_name	result	position	rating
Dog	Golden Retriever	1	5
Dog	German Shepherd	2	5
Dog	Mule	200	1
Cat	Shirazi	5	2
Cat	Siamese	3	3

3)

Description

Accepted

Editorial

Solutions

Submissions

← All Submissions

Accepted 21 / 21 testcases passed

omkark158 submitted at Sep 14, 2026 10:43

₹583.25

Save over 58%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

970 ms | Beats: 86.95%

772ms 892ms 1011ms 1131ms 1250ms 1370ms 1489ms 1509ms

Code | MySQL

Code

MySQL

Auto

```

1 # Write your MySQL query statement below
2 SELECT e.name, b.bonus
3 FROM Employee e
4 LEFT JOIN Bonus b
5 ON e.empId = b.empId
6 WHERE b.bonus < 1000 OR b.bonus IS NULL;

```

Saved

Ln 6

Testcase

Test Result

Accepted Runtime: 93 ms

Case 1

Input

Employee =

empId	name	supervisor	salary
3	Brad	null	4000
1	John	3	1000
2	Dan	3	2000
4	Thomas	3	4000

5)

Description

Accepted

Editorial

Solutions

Submissions

← All Submissions

Accepted 11 / 11 testcases passed

omkark158 submitted at Sep 14, 2026 10:46

₹583.25

Save over 58%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

330 ms | Beats: 95.66%

289ms 348ms 407ms 465ms 524ms 583ms 641ms 700ms

Code | MySQL

Code

MySQL

Auto

```

1 # Write your MySQL query statement below
2 SELECT e.name
3 FROM Employee e
4 JOIN Employee m
5 ON e.id = m.managerId
6 GROUP BY e.id, e.name
7 HAVING COUNT(m.id) >= 5;

```

Saved

Ln 7

Testcase

Test Result

Accepted Runtime: 82 ms

Case 1

Input

Employee =

id	name	department	managerId
101	John	A	null
102	Dan	A	101
103	James	A	101
104	Amy	A	101
105	...	A	101

6)

Your Population Census submission got 10.00 points. [Share](#) [Post](#)

You are now 70 points away from the 1st star for your sql badge.

[Try the next challenge](#) | [Try a Random Challenge](#)

Problem

Submissions

Leaderboard

Discussions

Given the **CITY** and **COUNTRY** tables, query the sum of the populations of all cities where the CONTINENT is 'Asia'.

Note: CITY.CountryCode and COUNTRY.Code are matching key columns.

Input Format



The **CITY** and **COUNTRY** tables are described as follows:



[Change Theme](#)

Language

MySQL



```
1 SELECT SUM(CITY.POPULATION)
2 FROM CITY
3 JOIN COUNTRY
4 ON CITY.CountryCode = COUNTRY.Code
5 WHERE COUNTRY.Continent = 'Asia';
```

7)

Your Average Population of Each Continent submission got 10.00 points. [Share](#) [Post](#)

You are now 60 points away from the 1st star for your sql badge.

[Try the next challenge](#) | [Try a Random Challenge](#)

Problem | Submissions | Leaderboard | Discussions

Given the **CITY** and **COUNTRY** tables, query the names of all the continents (COUNTRY.Continent) and their respective average city populations (CITY.Population) rounded down to the nearest integer.

Note: CITY.CountryCode and COUNTRY.Code are matching key columns.

Input Format

The **CITY** and **COUNTRY** tables are described as follows:




Change Theme Language MySQL

```

1 SELECT COUNTRY.CONTINENT, FLOOR(AVG(CITY.POPULATION))
2 FROM CITY
3 JOIN COUNTRY
4 ON CITY.COUNTRYCODE = COUNTRY.CODE
5 GROUP BY COUNTRY.CONTINENT;

```

9)

Description | Accepted | Editorial | Solutions | Submissions


← All Submissions

Accepted 16 / 16 testcases passed

omark158 submitted at Sep 14, 2026 10:52 [Solution](#)

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
478 ms | Beats 85.25%

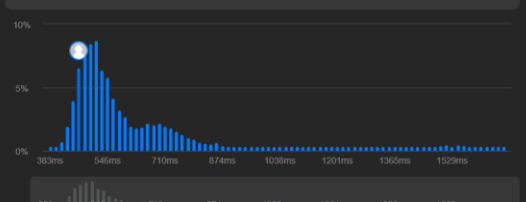

Code | MySQL

MySQL Auto

```

1 # Write your MySQL query statement below
2 SELECT product_id, 10 AS price
3 FROM Products
4 GROUP BY product_id
5 HAVING MIN(change_date) > '2019-08-16'
6
7 UNION
8
9 SELECT product_id, new_price AS price
10 FROM Products

```

Saved Ln 17, Col 1

Testcase Test Result

Accepted Runtime: 70 ms

Case 1

Input

Products =

product_id	new_price	change_date
1	20	2019-08-14
2	50	2019-08-14
1	30	2019-08-15
1	35	2019-08-16
2	65	2019-08-17

SUBQUERY PROBLEMS

1)

DescriptionEditorialSolutionsSubmissions

181. Employees Earning More Than Their ManagersSolved

EasyTopicsCompanies

SQL SchemaPandas Schema

Table: Employee

Column Name	Type
id	int
name	varchar
salary	int
managerId	int

id is the primary key (column with unique values) for this table. Each row of this table indicates the ID of an employee, their name, salary, and the ID of their manager.

Write a solution to find the employees who earn more than their managers.

Return the result table in **any order**.

The result format is in the following example.

Code

MySQLAuto

```
1 # Write your MySQL query statement below
2 SELECT e.name AS Employee
3 FROM Employee e
4 JOIN Employee m
5 ON e.managerId = m.id
6 WHERE e.salary > m.salary;
```

SavedLn 6, C

TestcaseTest Result

AcceptedRuntime: 66 ms

Case 1

Input

Employee =

id	name	salary	managerId
1	Joe	70000	3
2	Henry	80000	4
3	Sam	60000	null

2)

DescriptionAcceptedEditorialSolutionsSubmissions

All Submissions

Accepted12 / 12 testcases passed

omikark158 submitted at Sep 14, 2026 10:56

Solution

Unlock the Full LeetCode Experience

Runtime

606 ms | Beat: 62.77%

451ms524ms597ms670ms743ms816ms889ms962ms

Code

MySQLAuto

```
1 # Write your MySQL query statement below
2 SELECT c.name AS Customers
3 FROM Customers c
4 LEFT JOIN Orders o
5 ON c.id = o.customerId
6 WHERE o.customerId IS NULL;
```

SavedLn 6, C

TestcaseTest Result

AcceptedRuntime: 96 ms

Case 1

Input

Customers =

id	name
1	Joe
2	Henry
3	Sam
4	Max

3)

DescriptionAcceptedEditorialSolutionsSubmissions

All Submissions

Accepted15 / 15 testcases passed

omikark158 submitted at Sep 14, 2026 10:57

Solution

Unlock the Full LeetCode Experience

Runtime

513 ms | Beat: 60.90%

322ms407ms493ms579ms664ms750ms836ms921ms

Code

MySQLAuto

```
1 # Write your MySQL query statement below
2 SELECT w1.id
3 FROM Weather w1
4 JOIN Weather w2
5 ON DATEDIFF(w1.recordDate, w2.recordDate) = 1
6 WHERE w1.temperature > w2.temperature;
```

SavedLn 6, C

TestcaseTest Result

AcceptedRuntime: 62 ms

Case 1

Input

Weather =

id	recordDate	temperature
1	2015-01-01	10
2	2015-01-02	25
3	2015-01-03	20

4)

Description

Accepted

Editorial

Solutions

Submissions

← All Submissions

Accepted 21 / 21 testcases passed

ommark158 submitted at Sep 14, 2026 10:58

₹583.25

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1722 ms | Beats 36.18%

Code | MySQL

Code

MySQL

Auto

```

3 FROM SalesPerson
4 WHERE sales_id NOT IN (
5     SELECT o.sales_id
6     FROM Orders o
7     JOIN Company c
8     ON o.com_id = c.com_id
9     WHERE c.name = 'RED'
10 );
11

```

Saved

Ln 11, Col 1

Testcase

Test Result

Accepted Runtime: 141 ms

Case 1

Input

SalesPerson =

sales_id	name	salary	commission_rate	hire_date
1	John	100000	6	4/1/2006
2	Amy	12000	5	5/1/2010
3	Mark	65000	12	12/25/2008
4	Pam	25000	25	1/1/2005
5	Allen	75000	10	2/3/2007

5)

Description

Accepted

Editorial

Solutions

Submissions

← All Submissions

Accepted 23 / 23 testcases passed

ommark158 submitted at Sep 14, 2026 10:59

₹583.25

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

558 ms | Beats 85.78%

Code | MySQL

Code

MySQL

Auto

```

1 # Write your MySQL query statement below
2 SELECT DISTINCT l1.num AS ConsecutiveNums
3 FROM Logs l1
4 JOIN Logs l2 ON l1.id = l2.id - 1
5 JOIN Logs l3 ON l2.id = l3.id - 1
6 WHERE l1.num = l2.num
7 AND l2.num = l3.num;

```

Saved

Ln 7, Col 21

Testcase

Test Result

Accepted Runtime: 66 ms

Case 1

Input

Logs =

id	num
1	1
2	1
3	1
4	2

6)

Description

Accepted

Editorial

Solutions

Submissions

← All Submissions

Accepted 8 / 8 testcases passed

ommark158 submitted at Sep 14, 2026 11:02

₹583.25

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

459 ms | Beats 51.80%

Code | MySQL

Code

MySQL

Auto

```

1 # Write your MySQL query statement below
2 SELECT p.firstName, p.lastName, a.city, a.state
3 FROM Person p
4 LEFT JOIN Address a
5 ON p.personId = a.personId;

```

Saved

Ln 5, Col 1

Testcase

Test Result

Accepted Runtime: 90 ms

Case 1

Input

Person =

personId	lastName	firstName
1	Wang	Allen
2	Alice	Bob

7)

Accepted
11 / 11 testcases passed
omark158 submitted at Sep 14, 2026 11:06
Solution

Unlock the Full LeetCode Experience
7583.25 ms
Save over 98%

Runtime
449 ms | Beats: 19.28%

Code
MySQL

Code

```

1 # Write your MySQL query statement below
2 SELECT score,
3       DENSE_RANK() OVER (ORDER BY score DESC) AS 'rank'
4 FROM Scores
5 ORDER BY score DESC;

```

Testcase
Test Result
Accepted Runtime: 67 ms
Case 1
Input

```

Scores =
| id | score |
|---|-----|
| 1  | 3.5   |
| 2  | 3.65  |
| 3  | 4     |
| 4  | 3.85  |

```

8)

Description
Editorial
Solutions
Submissions

570. Managers with at Least 5 Direct Reports
Solved

Medium
Topics
Companies
Hint

SQL Schema
Pandas Schema

Table: Employee

Column Name	Type
id	int
name	varchar
department	varchar
managerId	int

id is the primary key (column with unique values) for this table. Each row of this table indicates the name of an employee, their department, and the id of their manager. If managerId is null, then the employee does not have a manager. No employee will be the manager of himself.

Write a solution to find managers with at least five direct reports.

Return the result table in **any order**.

The result format is in the following example.

1.9K
399
55 Online

Code
MySQL

```

1 # Write your MySQL query statement below
2 SELECT e.name
3 FROM Employee e
4 JOIN Employee m
5 ON e.id = m.managerId
6 GROUP BY e.id, e.name
7 HAVING COUNT(m.id) >= 5;

```

Testcase
Test Result
Accepted Runtime: 64 ms
Case 1
Input

```

Employee =
| id | name | department | managerId |
|---|-----|-----|-----|
| 101 | John | A          | null      |
| 102 | Dan  | A          | 101       |
| 103 | James | A         | 101       |
| 104 | Amy  | A          | 101       |

```

9)

Accepted
22 / 22 testcases passed
omark158 submitted at Sep 14, 2026 11:11
Solution

Unlock the Full LeetCode Experience
7583.25 ms
Save over 98%

Runtime
704 ms | Beats: 90.07%

Code
MySQL

Code

```

2 DELETE FROM Person
3 WHERE id NOT IN (
4     SELECT id
5     FROM (
6         SELECT MIN(id) AS id
7         FROM Person
8         GROUP BY email
9     ) AS temp
10 );

```

Testcase
Test Result
Accepted Runtime: 91 ms
Case 1
Input

```

Person =
| id | email |
|---|-----|
| 1  | john@example.com |
| 2  | bob@example.com  |
| 3  | john@example.com |

```

11)

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted

10 / 10 testcases passed

omark158 submitted at Sep 14, 2026 11:13


Solution

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

267 ms | Beats 91.98%

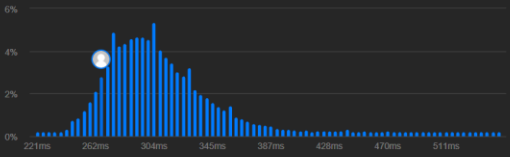

221ms 262ms 304ms 345ms 387ms 428ms 470ms 511ms

Code MySQL

Code

MySQL

Auto

```
1 # Write your MySQL query statement below
2 SELECT MAX(salary) AS SecondHighestSalary
3 FROM Employee
4 WHERE salary < (SELECT MAX(salary) FROM Employee);
```

Saved

Ln 4, Col 5

Testcase

Test Result

Accepted

Runtime: 127 ms

Case 1

Case 2

Input

Employee =

id	salary
1	100
2	200
3	300