


DBT SELF-LEARNING

GROUP BY PROBLEM

GROUP BY Problems


Q1)

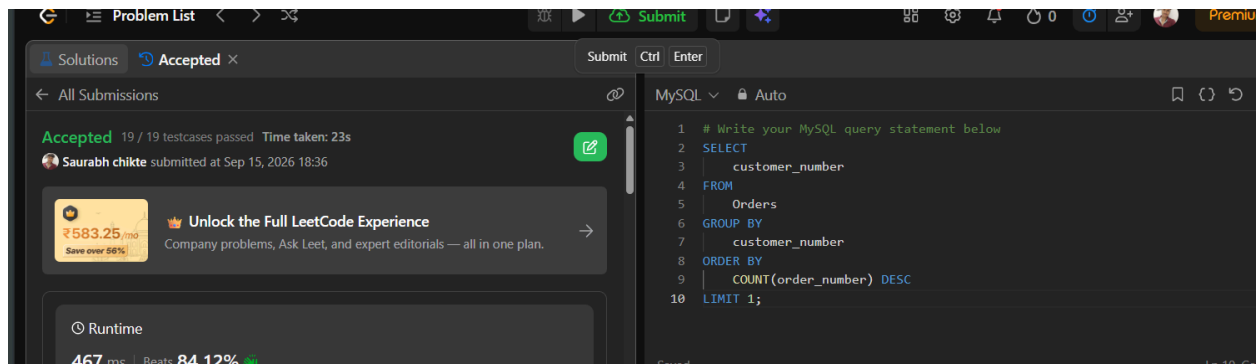

```
1 # Write your MySQL query statement below
2 SELECT
3     customer_number
4 FROM
5     Orders
6 GROUP BY
7     customer_number
8 ORDER BY
9     COUNT(order_number) DESC
10 LIMIT 1;
```

SQL Practice Problems & Solutions

Basic Aggregate Functions

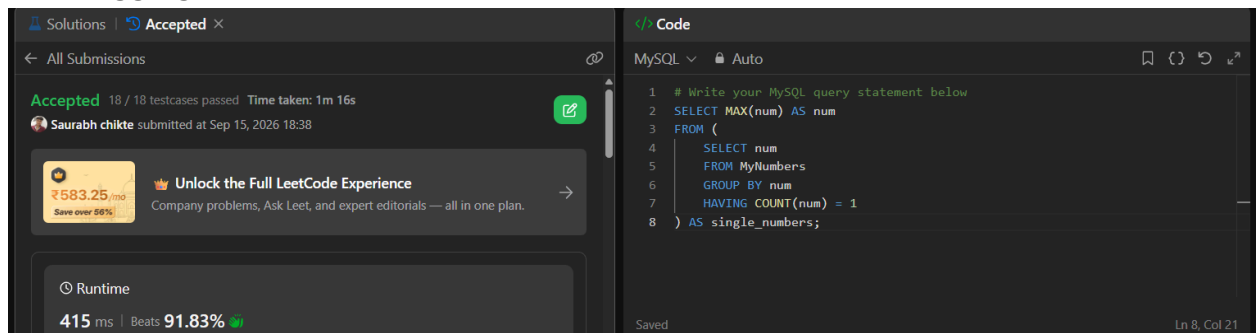

```
1 # Write your MySQL query statement below
2 SELECT MAX(num) AS num
3 FROM (
4     SELECT num
5     FROM MyNumbers
6     GROUP BY num
7     HAVING COUNT(num) = 1
8 ) AS single_numbers;
```

Problem 3: Game Play Analysis I

DBT SELF-LEARNING GROUP BY PROBLEM

Solutions | Accepted ×

← All Submissions

Accepted 12 / 12 testcases passed Time taken: 1m 36s

Saurabh chikte submitted at Sep 15, 2026 18:40

₹583.25/mo Save over 55%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
497 ms | Beats 80.80%

Code

MySQL Auto

```
1 # Write your MySQL query statement below
2 SELECT
3     player_id,
4     MIN(event_date) AS first_login
5 FROM
6     Activity
7 GROUP BY
8     player_id;
```

Saved Ln 8, Col 15

Problem 4: Number of Unique Subjects Taught by Each Teacher

Solutions | Accepted ×

← All Submissions

Accepted 22 / 22 testcases passed Time taken: 1m 51s

Saurabh chikte submitted at Sep 15, 2026 18:41

₹583.25/mo Save over 55%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
634 ms | Beats 41.79%

Code

MySQL Auto

```
1 SELECT
2     date_id,
3     make_name,
4     COUNT(DISTINCT lead_id) AS unique_leads,
5     COUNT(DISTINCT partner_id) AS unique_partners
6 FROM
7     DaillySales
8 GROUP BY
9     date_id,
10    make_name;
```

Saved Ln 10, Col 15

Testcase Test Result

Problem 5: Find Followers Count

Solutions | Accepted ×

← All Submissions

Accepted 22 / 22 testcases passed Time taken: 2m 3s

Saurabh chikte submitted at Sep 15, 2026 18:42

₹583.25/mo Save over 55%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
634 ms | Beats 36.58%

Code

MySQL Auto

```
1 # Write your MySQL query statement below
2 SELECT
3     event_day AS day,
4     emp_id,
5     SUM(out_time - in_time) AS total_time
6 FROM
7     Employees
8 GROUP BY
9     event_day,
10    emp_id;
```

Saved Ln 10, Col 12

Problem 6: Classes More Than 5 Students

DBT SELF-LEARNING GROUP BY PROBLEM

Solutions | Accepted x

All Submissions

Accepted 12 / 12 testcases passed Time taken: 2m 3s

Saurabh chikte submitted at Sep 15, 2026 18:43

Runtime

405 ms | Beats 52.68%

6%

4%

Code

```
MySQL v Auto
1 SELECT
2   actor_id,
3   director_id
4 FROM
5   ActorDirector
6 GROUP BY
7   actor_id,
8   director_id
9 HAVING
10  COUNT(timestamp) >= 3;
```

Saved Ln 10, Col 27

Problem 7: User Activity for the Past 30 Days I

Solutions | Accepted x

All Submissions

Accepted 24 / 24 testcases passed

Saurabh chikte submitted at Sep 15, 2026 18:43

Unlock the Full LeetCode Experience

₹583.25/mo Save over 56%

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

727 ms | Beats 46.51%

Code

```
MySQL v Auto
1 # Write your MySQL query statement below
2 SELECT
3   user_id,
4   MAX(time_stamp) AS last_stamp
5 FROM
6   Logins
7 WHERE
8   time_stamp >= '2020-01-01 00:00:00'
9   AND time_stamp < '2021-01-01 00:00:00'
10 GROUP BY
11  user_id;
```

Saved Ln 11, Col 13

Problem 8: Project Employees I

Solutions | Judging...

All Submissions

Accepted Time taken: 2m 25s

Saurabh chikte submitted at Sep 15, 2026 18:44

Unlock the Full LeetCode Experience

₹583.25/mo Save over 56%

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

0 ms | Beats -%


Code

```
MySQL v Auto
1 # Write your MySQL query statement below
2 SELECT
3   query_name,
4   ROUND(AVG(rating / position), 2) AS quality,
5   ROUND(AVG(rating < 3) * 100, 2) AS poor_query_percentage
6 FROM
7   Queries
8 WHERE
9   query_name IS NOT NULL
10 GROUP BY
11  query_name;
```

Saved Ln 11, Col 16

Problem 9: Sales Analysis III

DBT SELF-LEARNING GROUP BY PROBLEM

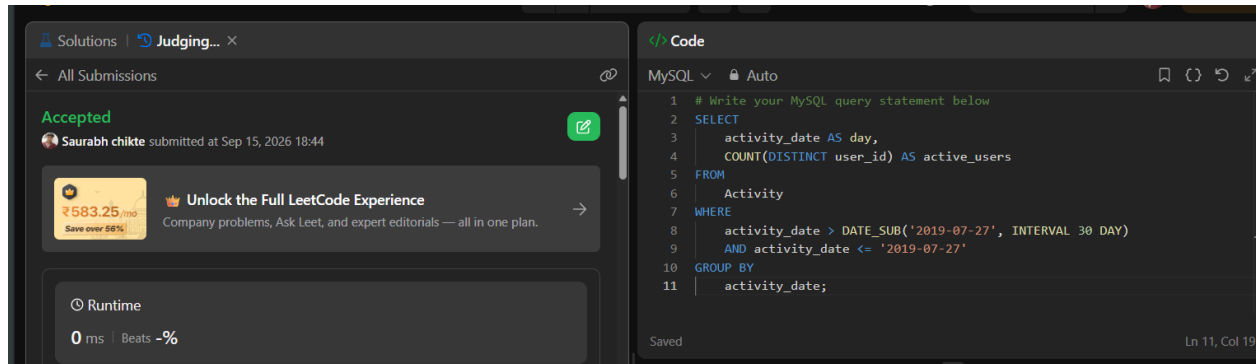

Solutions | Judging... X

All Submissions

Accepted

Saurabh chikte submitted at Sep 15, 2026 18:44

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime


0 ms | Beats -%

Code

```
MySQL Auto
1 # Write your MySQL query statement below
2 SELECT
3     activity_date AS day,
4     COUNT(DISTINCT user_id) AS active_users
5 FROM
6     Activity
7 WHERE
8     activity_date > DATE_SUB('2019-07-27', INTERVAL 30 DAY)
9     AND activity_date <= '2019-07-27'
10 GROUP BY
11     activity_date;
```

Saved Ln 11, Col 19

Problem 10: Product Sales Analysis I

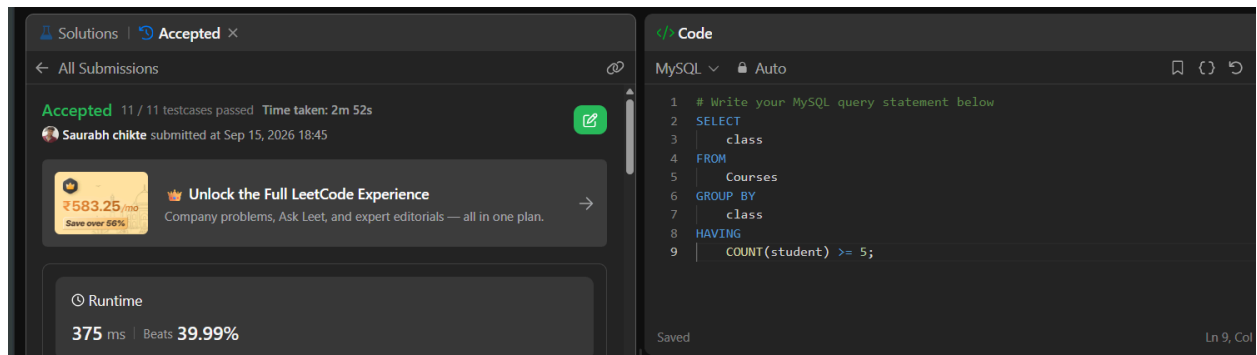

Solutions | Accepted X

All Submissions

Accepted 11 / 11 testcases passed Time taken: 2m 52s

Saurabh chikte submitted at Sep 15, 2026 18:45

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

375 ms | Beats 39.99%


Code

```
MySQL Auto
1 # Write your MySQL query statement below
2 SELECT
3     class
4 FROM
5     Courses
6 GROUP BY
7     class
8 HAVING
9     COUNT(student) >= 5;
```

Saved Ln 9, Col 1

JOINS Problems

Problem 1: Replace Employee ID With The Unique Identifier

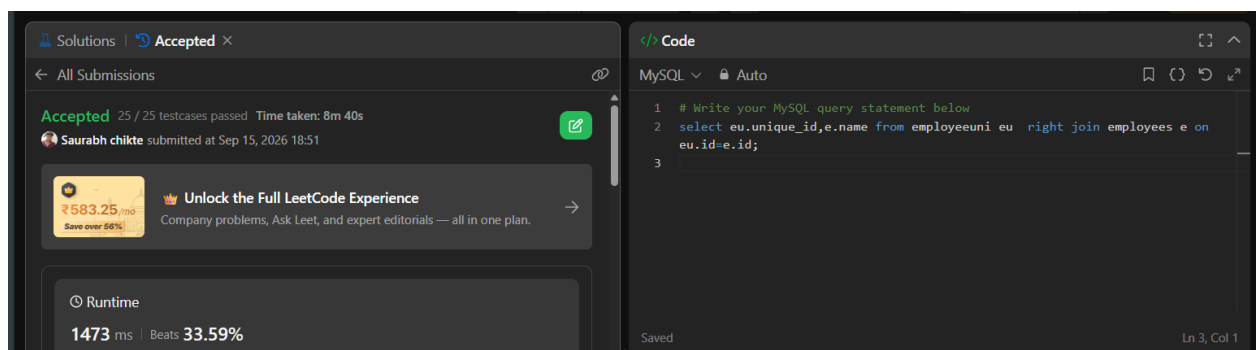

Solutions | Accepted X

All Submissions

Accepted 25 / 25 testcases passed Time taken: 8m 40s

Saurabh chikte submitted at Sep 15, 2026 18:51

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1473 ms | Beats 33.59%


Code

```
MySQL Auto
1 # Write your MySQL query statement below
2 select eu.unique_id,e.name from employeeuni eu right join employees e on
3 eu.id=e.id;
```

Saved Ln 3, Col 1

DBT SELF-LEARNING GROUP BY PROBLEM


Problem 2: Product Sales Analysis I

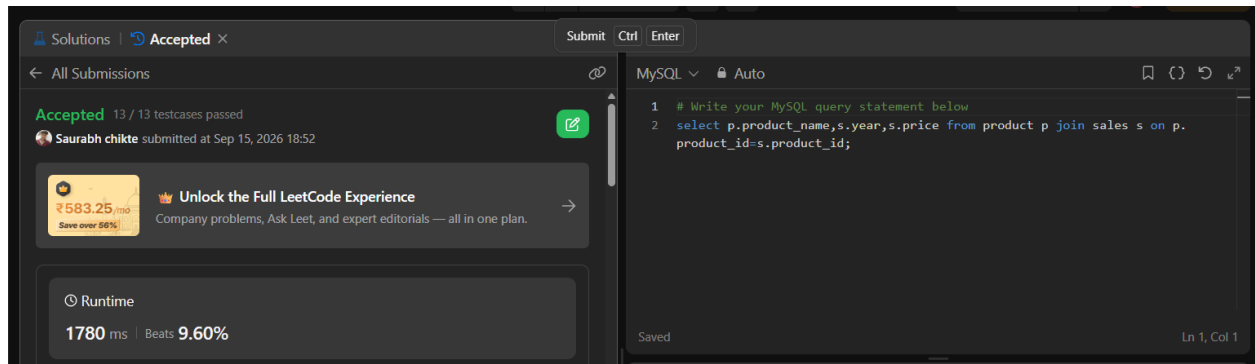

The screenshot shows the LeetCode interface for Problem 2: Product Sales Analysis I. The solution is accepted, with 13/13 testcases passed. The user Saurabh chikte submitted the solution on Sep 15, 2026, at 18:52. The runtime is 1780 ms, and it beats 9.60% of other solutions. The code is written in MySQL and uses a JOIN to combine product and sales data.

```
1 # Write your MySQL query statement below
2 select p.product_name,s.year,s.price from product p join sales s on p.
   product_id=s.product_id;
```


Problem 3: Customer Who Visited but Did Not Make Any Transactions

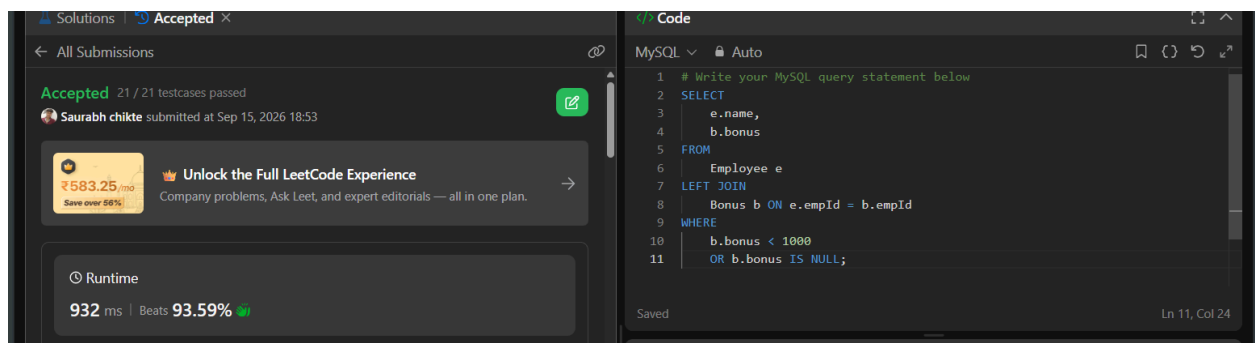

The screenshot shows the LeetCode interface for Problem 3: Customer Who Visited but Did Not Make Any Transactions. The solution is accepted, with 21/21 testcases passed. The user Saurabh chikte submitted the solution on Sep 15, 2026, at 18:53. The runtime is 932 ms, and it beats 93.59% of other solutions. The code is written in MySQL and uses a LEFT JOIN to find customers who have visited but not made any transactions.

```
1 # Write your MySQL query statement below
2 SELECT
3     e.name,
4     b.bonus
5 FROM
6     Employee e
7 LEFT JOIN
8     Bonus b ON e.empId = b.empId
9 WHERE
10    b.bonus < 1000
11    OR b.bonus IS NULL;
```

Problem 4: Rising Temperature

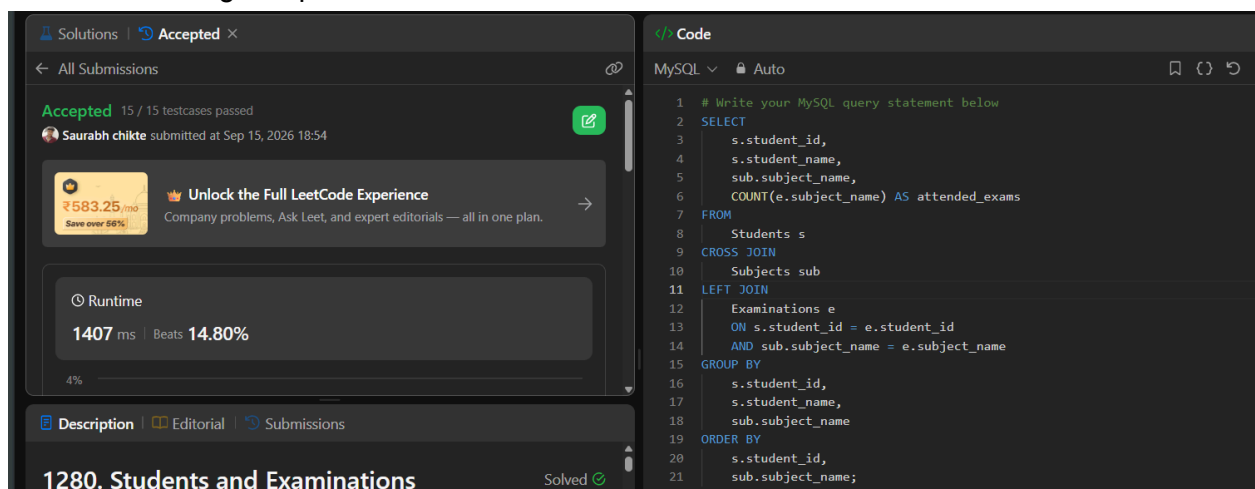


The screenshot shows the LeetCode interface for Problem 4: Rising Temperature. The solution is accepted, with 15/15 testcases passed. The user Saurabh chikte submitted the solution on Sep 15, 2026, at 18:54. The runtime is 1407 ms, and it beats 14.80% of other solutions. The code is written in MySQL and uses a CROSS JOIN to find students who have taken exams in consecutive years.

```
1 # Write your MySQL query statement below
2 SELECT
3     s.student_id,
4     s.student_name,
5     sub.subject_name,
6     COUNT(e.subject_name) AS attended_exams
7 FROM
8     Students s
9 CROSS JOIN
10    Subjects sub
11 LEFT JOIN
12    Examinations e
13     ON s.student_id = e.student_id
14     AND sub.subject_name = e.subject_name
15 GROUP BY
16     s.student_id,
17     s.student_name,
18     sub.subject_name
19 ORDER BY
20     s.student_id,
21     sub.subject_name;
```

Problem 5: Average Time of Process per Machine


DBT SELF-LEARNING GROUP BY PROBLEM

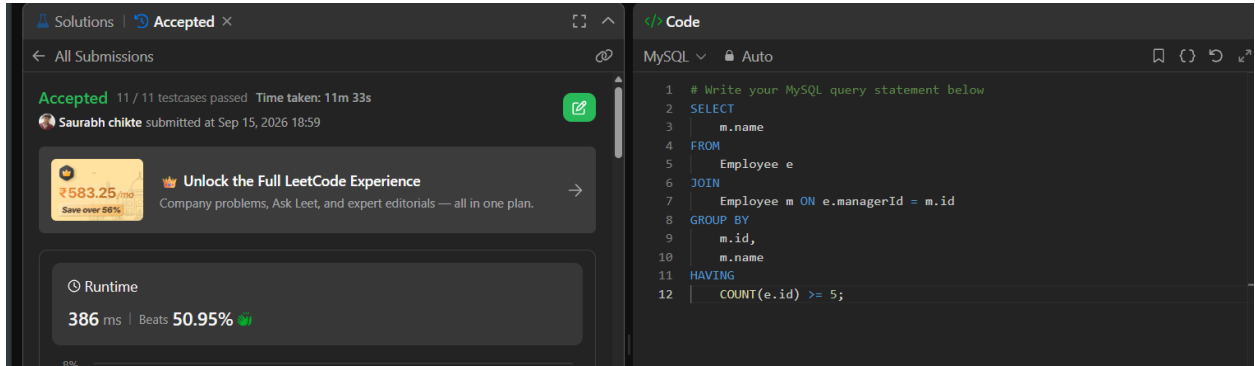


The screenshot shows a LeetCode solution for Problem 6: Employee Bonus. The submission is marked as 'Accepted' with 11/11 testcases passed and a time taken of 11m 33s. The user 'Saurabh chikte' submitted it on Sep 15, 2026 at 18:59. A promotional banner for LeetCode is visible. The runtime is 386 ms, beating 50.95% of solutions. The SQL query in the 'Code' editor is as follows:

```
1 # Write your MySQL query statement below
2 SELECT
3     m.name
4 FROM
5     Employee e
6 JOIN
7     Employee m ON e.managerId = m.id
8 GROUP BY
9     m.id,
10    m.name
11 HAVING
12     COUNT(e.id) >= 5;
```

Problem 6: Employee Bonus

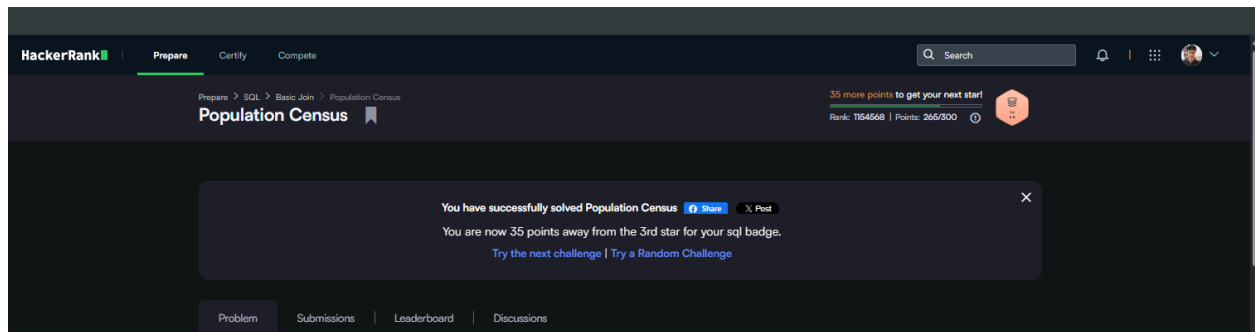


Problem 7: Students and Examinations

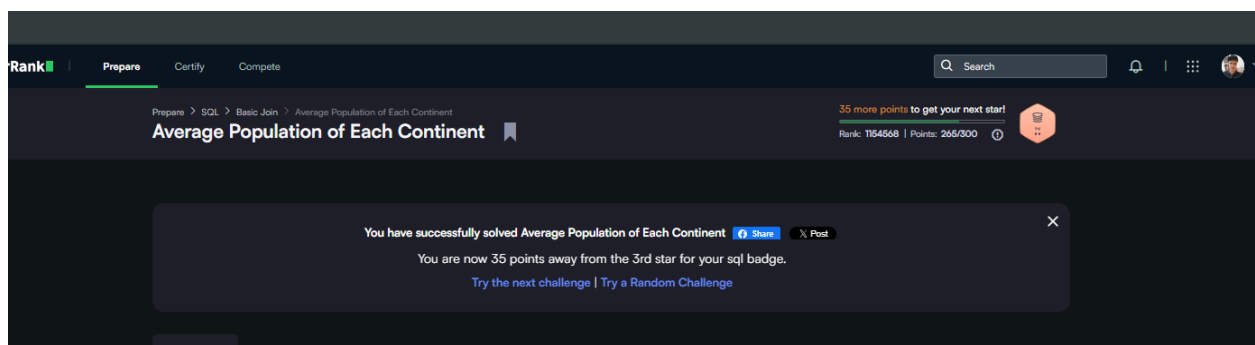


Problem 8: Managers with at Least 5 Direct Reports

DBT SELF-LEARNING GROUP BY PROBLEM

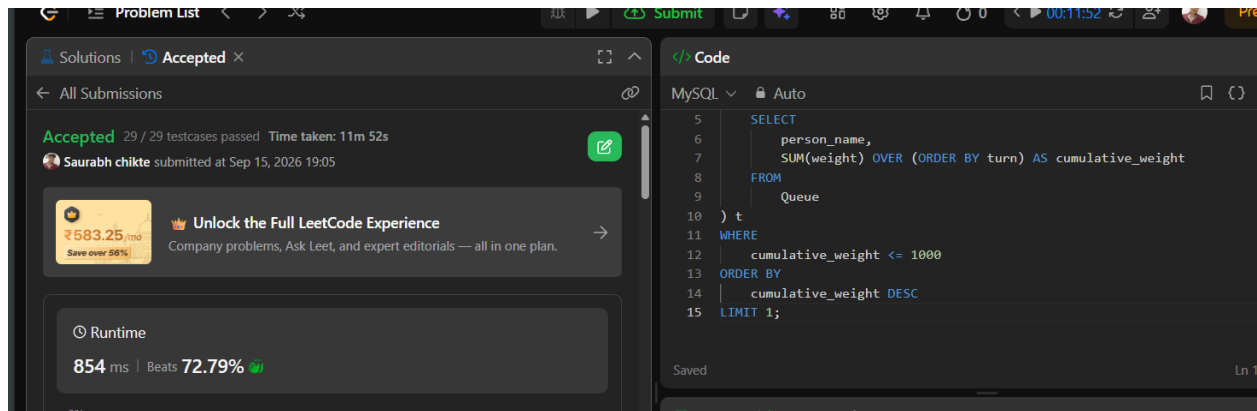


Problem 9: Confirmation Rate

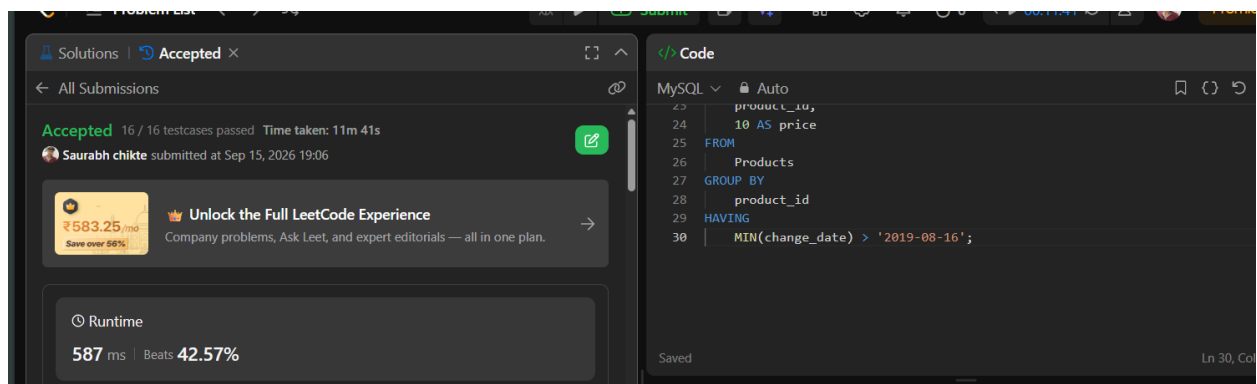


Subquery Problems

Problem 1: Employees Whose Manager Left the Company

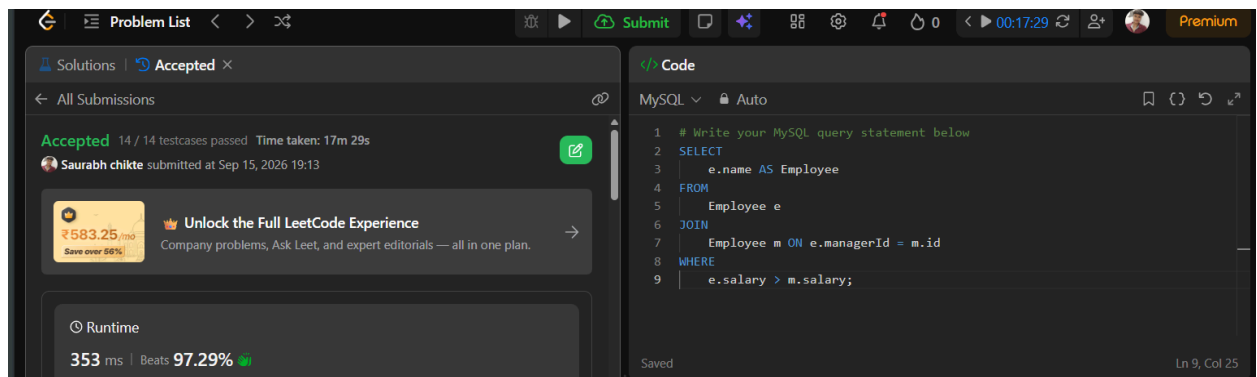

Problem 2: Exchange Seats


DBT SELF-LEARNING GROUP BY PROBLEM

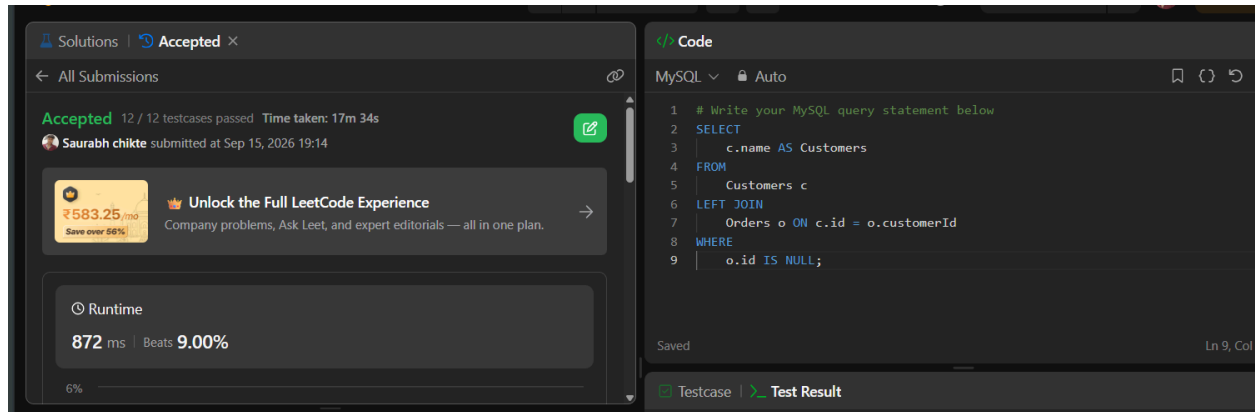

The screenshot shows the LeetCode interface for Problem 3: Movie Rating. The left sidebar displays the submission status as 'Accepted' with 12/12 testcases passed and a time taken of 17m 34s. The user 'Saurabh chikte' submitted the solution on Sep 15, 2026, at 19:14. A promotional banner for LeetCode is visible. The runtime is 872 ms, beating 9.00% of submissions. The right pane shows the MySQL query code:

```
1 # Write your MySQL query statement below
2 SELECT
3     c.name AS Customers
4 FROM
5     Customers c
6 LEFT JOIN
7     Orders o ON c.id = o.customerId
8 WHERE
9     o.id IS NULL;
```


Problem 3: Movie Rating

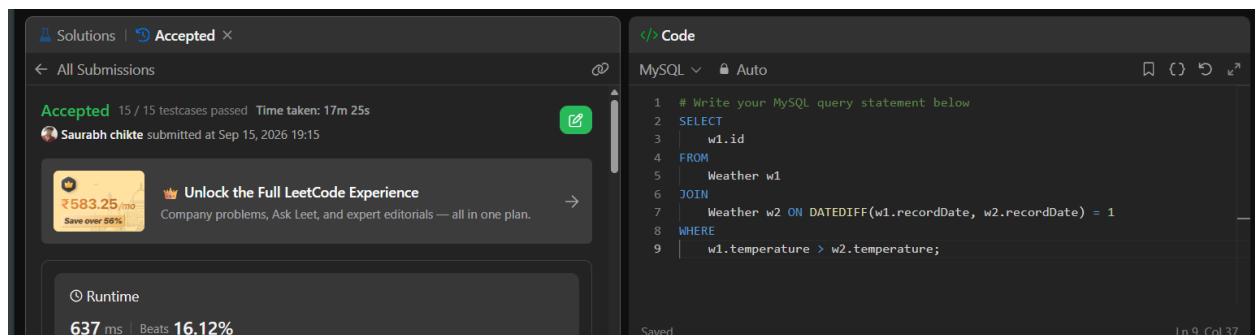

The screenshot shows the LeetCode interface for Problem 4: Restaurant Growth. The left sidebar displays the submission status as 'Accepted' with 15/15 testcases passed and a time taken of 17m 25s. The user 'Saurabh chikte' submitted the solution on Sep 15, 2026, at 19:15. A promotional banner for LeetCode is visible. The runtime is 637 ms, beating 16.12% of submissions. The right pane shows the MySQL query code:

```
1 # Write your MySQL query statement below
2 SELECT
3     w1.id
4 FROM
5     Weather w1
6 JOIN
7     Weather w2 ON DATEDIFF(w1.recordDate, w2.recordDate) = 1
8 WHERE
9     w1.temperature > w2.temperature;
```

Problem 4: Restaurant Growth

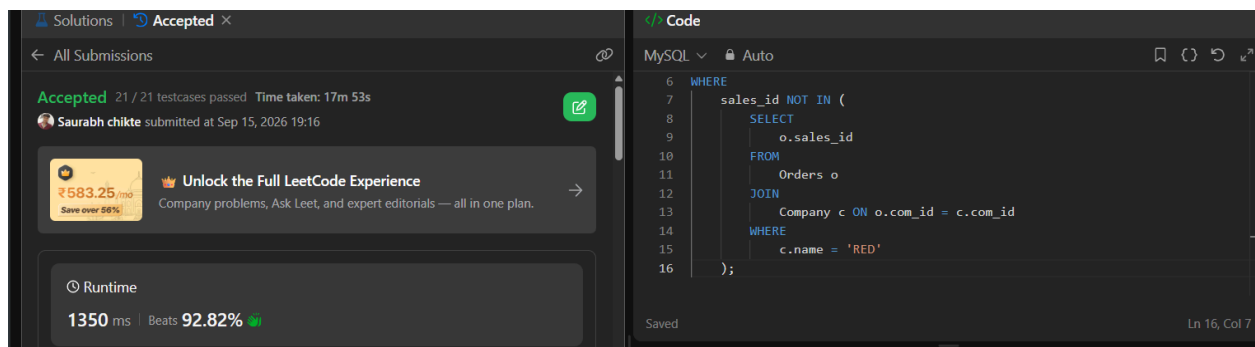


The screenshot shows the LeetCode interface for Problem 5: Friend Requests II: Who Has the Most Friends. The left sidebar displays the submission status as 'Accepted' with 21/21 testcases passed and a time taken of 17m 53s. The user 'Saurabh chikte' submitted the solution on Sep 15, 2026, at 19:16. A promotional banner for LeetCode is visible. The runtime is 1350 ms, beating 92.82% of submissions. The right pane shows the MySQL query code:

```
6 WHERE
7     sales_id NOT IN (
8         SELECT
9             o.sales_id
10        FROM
11            Orders o
12        JOIN
13            Company c ON o.com_id = c.com_id
14        WHERE
15            c.name = 'RED'
16    );
```

Problem 5: Friend Requests II: Who Has the Most Friends

DBT SELF-LEARNING GROUP BY PROBLEM

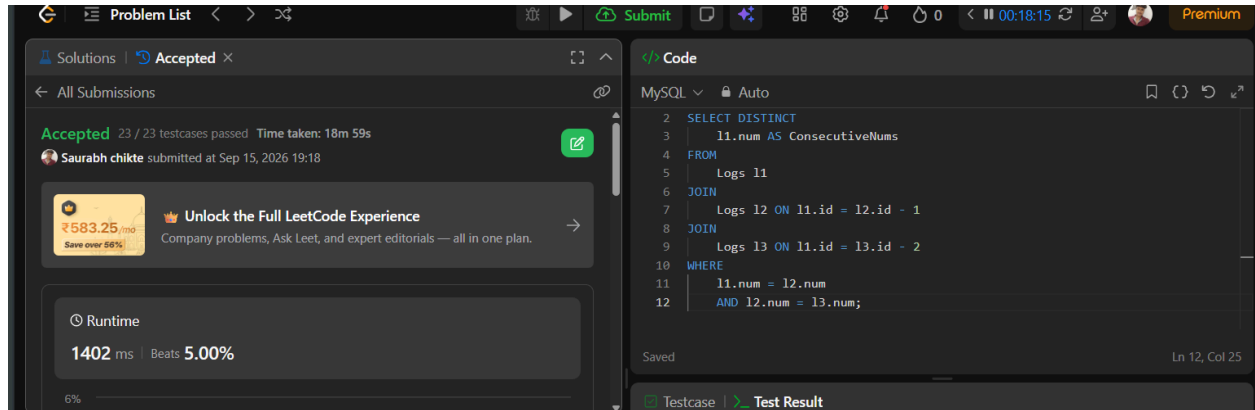

Accepted 23 / 23 testcases passed Time taken: 18m 59s
Saurabh chikte submitted at Sep 15, 2026 19:18

₹583.25/mo Save over 56%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
1402 ms | Beats **5.00%**


6%

```
2 SELECT DISTINCT
3   l1.num AS ConsecutiveNums
4 FROM
5   Logs l1
6 JOIN
7   Logs l2 ON l1.id = l2.id - 1
8 JOIN
9   Logs l3 ON l1.id = l3.id - 2
10 WHERE
11   l1.num = l2.num
12   AND l2.num = l3.num;
```

Saved Ln 12, Col 25

Testcase Test Result

Problem 6: Investments in 2016

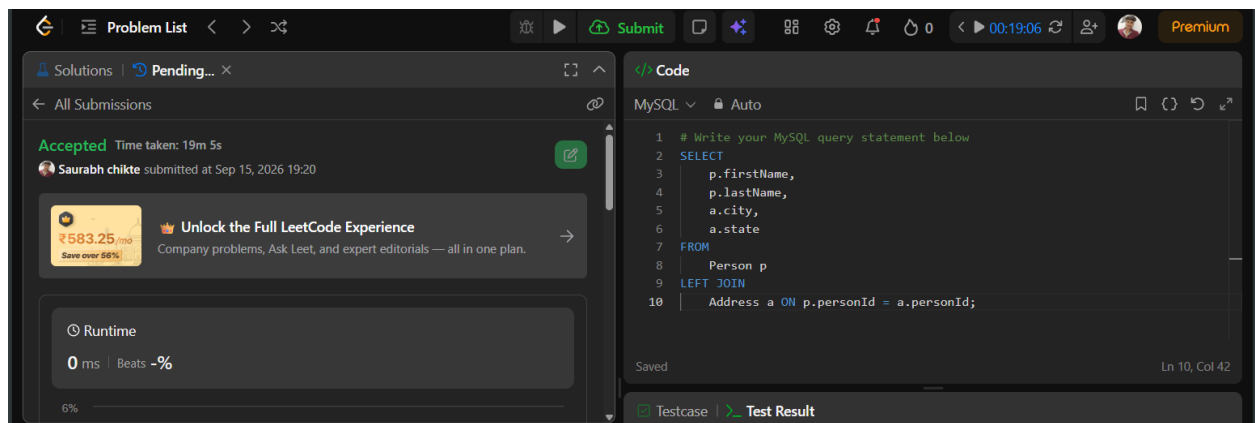

Accepted Time taken: 19m 5s
Saurabh chikte submitted at Sep 15, 2026 19:20

₹583.25/mo Save over 56%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
0 ms | Beats **-%**


6%

```
1 # Write your MySQL query statement below
2 SELECT
3   p.firstName,
4   p.lastName,
5   a.city,
6   a.state
7 FROM
8   Person p
9 LEFT JOIN
10  Address a ON p.personId = a.personId;
```

Saved Ln 10, Col 42

Testcase Test Result

Problem 7: Department Top Three Salaries

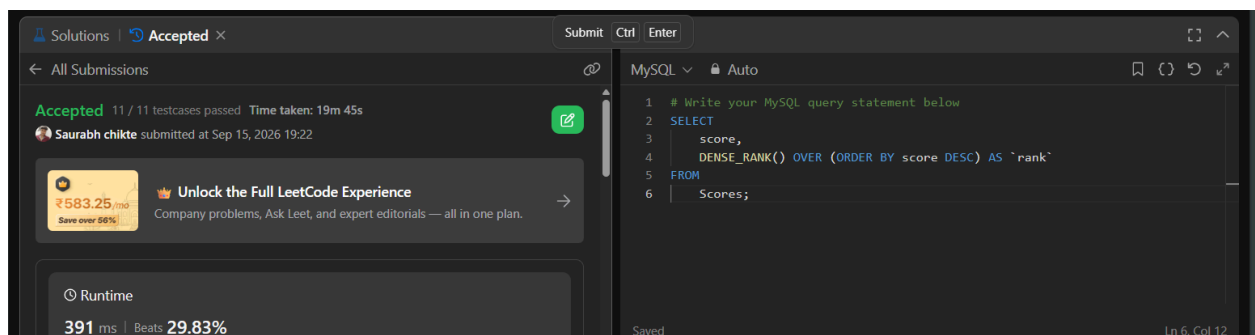

Accepted 11 / 11 testcases passed Time taken: 19m 45s
Saurabh chikte submitted at Sep 15, 2026 19:22

₹583.25/mo Save over 56%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
391 ms | Beats **29.83%**


6%

```
1 # Write your MySQL query statement below
2 SELECT
3   score,
4   DENSE_RANK() OVER (ORDER BY score DESC) AS 'rank'
5 FROM
6   Scores;
```

Saved Ln 6, Col 12

Problem 8: Fix Names in a Table

DBT SELF-LEARNING GROUP BY PROBLEM

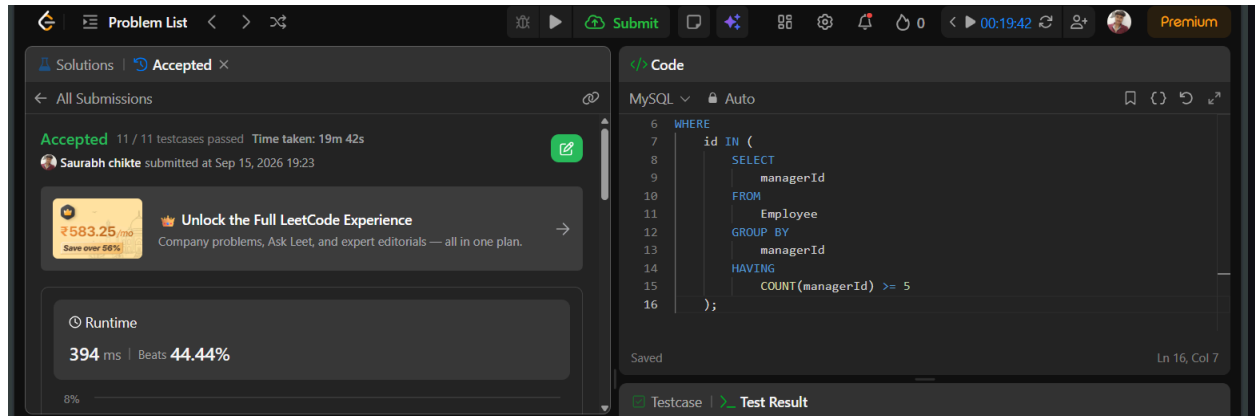

This screenshot shows the LeetCode interface for Problem 10: Delete Duplicate Emails. The solution is marked as 'Accepted' with 11/11 testcases passed and a runtime of 394 ms, beating 44.44% of submissions. The code is a MySQL query that deletes duplicate emails from the Employee table.

Accepted 11 / 11 testcases passed Time taken: 19m 42s
Saurabh chikte submitted at Sep 15, 2026 19:23

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
394 ms | Beats 44.44%

8%


Code

```
MySQL Auto
6 WHERE
7 id IN (
8     SELECT
9         managerId
10    FROM
11        Employee
12   GROUP BY
13       managerId
14  HAVING
15      COUNT(managerId) >= 5
16 );
```

Saved Ln 16, Col 7

Testcase Test Result

Problem 10: Delete Duplicate Emails

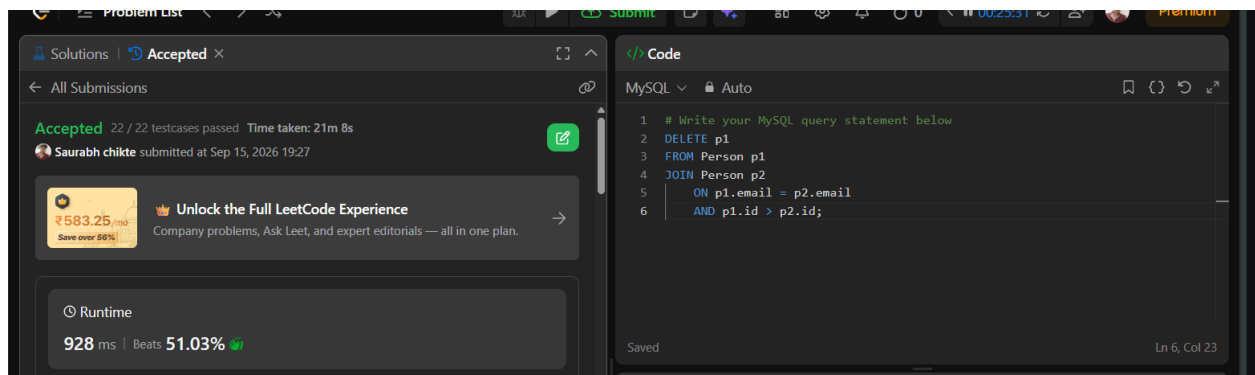

This screenshot shows the LeetCode interface for Problem 11: Second Highest Salary. The solution is marked as 'Accepted' with 22/22 testcases passed and a runtime of 928 ms, beating 51.03% of submissions. The code is a MySQL query that deletes duplicate emails from the Person table.

Accepted 22 / 22 testcases passed Time taken: 21m 8s
Saurabh chikte submitted at Sep 15, 2026 19:27

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.


Runtime
928 ms | Beats 51.03%

Code

```
MySQL Auto
1 # Write your MySQL query statement below
2 DELETE p1
3 FROM Person p1
4 JOIN Person p2
5     ON p1.email = p2.email
6     AND p1.id > p2.id;
```

Saved Ln 6, Col 23

Problem 11: Second Highest Salary

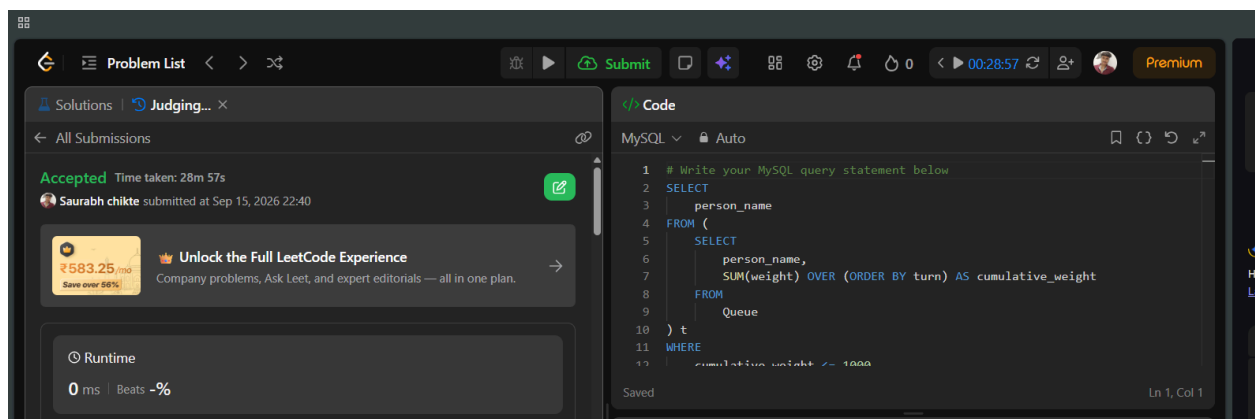

This screenshot shows the LeetCode interface for Problem 11: Second Highest Salary. The solution is marked as 'Accepted' with a runtime of 0 ms. The code is a MySQL query that selects the second highest salary from the Queue table.

Accepted Time taken: 28m 57s
Saurabh chikte submitted at Sep 15, 2026 22:40

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
0 ms | Beats -%

Code

```
MySQL Auto
1 # Write your MySQL query statement below
2 SELECT
3     person_name
4 FROM (
5     SELECT
6         person_name,
7         SUM(weight) OVER (ORDER BY turn) AS cumulative_weight
8     FROM
9         Queue
10 ) t
11 WHERE
12     cumulative_weight <= 1000
```

Saved Ln 1, Col 1

DBT SELF-LEARNING GROUP BY PROBLEM

Problem 12: Group Sold Products By The Date

The screenshot shows the LeetCode interface for the problem 'Group Sold Products By The Date'. The 'Solutions' tab is active, showing a submission by 'Saurabh chikte' that is 'Accepted' with 10/10 testcases passed. The submission was made on Sep 15, 2026 at 22:41. A promotional banner for 'Unlock the Full LeetCode Experience' is visible. The runtime is 269 ms, beating 90.53% of other submissions. The 'Code' tab shows the following MySQL query:

```
1 # Write your MySQL query statement below
2 SELECT MAX(salary) AS SecondHighestSalary
3 FROM Employee
4 WHERE salary < (SELECT MAX(salary) FROM Employee);
```

The bottom of the interface shows 'Testcase' and 'Test Result' tabs.

CASE STUDY OUPUTS

```
KD2_SAURABH_98912>
KD2_SAURABH_98912>DELIMITER ;
KD2_SAURABH_98912>-- Run Round 1 and capture the number of allocated students
KD2_SAURABH_98912>CALL AllocateRound1(@allocated);
Query OK, 0 rows affected (0.08 sec)

KD2_SAURABH_98912>SELECT @allocated AS StudentsAllocatedInRound1;
+-----+
| StudentsAllocatedInRound1 |
+-----+
| 3 |
+-----+
1 row in set (0.00 sec)

KD2_SAURABH_98912>
KD2_SAURABH_98912>-- Run Round 2 (for any remaining unallocated students)
KD2_SAURABH_98912>CALL AllocateRound2('Allocated_R2');
Query OK, 0 rows affected (0.00 sec)
```

DBT SELF-LEARNING

GROUP BY PROBLEM

```
KD2_SAURABH_98912>
KD2_SAURABH_98912>--- Run Round 2 (for any remaining unallocated students)
KD2_SAURABH_98912>CALL AllocateRound2('Allocated_R2');
Query OK, 0 rows affected (0.00 sec)
```

```
KD2_SAURABH_98912>SELECT
->   s.EntranceRank,
->   s.StudentName,
->   s.AllocationStatus,
->   COALESCE(c.CenterName, '---') AS AllocatedCenter,
->   COALESCE(co.CourseName, '---') AS AllocatedCourse
-> FROM
->   Students s
-> LEFT JOIN
->   Centers c ON s.AllocatedCenterID = c.CenterID
-> LEFT JOIN
->   Courses co ON s.AllocatedCourseID = co.CourseID
-> ORDER BY
->   s.EntranceRank ASC;
```

EntranceRank	StudentName	AllocationStatus	AllocatedCenter	AllocatedCourse
1	Amit	Allocated_R1	CDAC ACTS Pune	Diploma in Advanced Computing

```
->   s.EntranceRank ASC;
```

EntranceRank	StudentName	AllocationStatus	AllocatedCenter	AllocatedCourse
1	Amit	Allocated_R1	CDAC ACTS Pune	Diploma in Advanced Computing
2	Neha	Allocated_R1	CDAC ACTS Pune	Diploma in Big Data Analytics
3	Rahul	Allocated_R1	Know-IT Pune	Diploma in Advanced Computing

3 rows in set (0.01 sec)

```
KD2_SAURABH_98912>SELECT
->   c.CenterName,
->   co.CourseName
```

```
KD2_SAURABH_98912>SELECT
->   c.CenterName,
->   co.CourseName,
->   cc.TotalSeats,
->   cc.AvailableSeats,
->   (cc.TotalSeats - cc.AvailableSeats) AS FilledSeats
-> FROM
->   CenterCapacity cc
-> JOIN
->   Centers c ON cc.CenterID = c.CenterID
-> JOIN
->   Courses co ON cc.CourseID = co.CourseID
-> ORDER BY
->   c.CenterName, co.CourseName;
```

CenterName	CourseName	TotalSeats	AvailableSeats	FilledSeats
CDAC ACTS Pune	Diploma in Advanced Computing	1	0	1
CDAC ACTS Pune	Diploma in Big Data Analytics	1	0	1
Know-IT Pune	Diploma in Advanced Computing	2	1	1

3 rows in set (0.00 sec)