

1. Group by

586. Customer Placing the Largest Number of Orders

The screenshot shows the LeetCode interface for problem 586. On the left, the 'Runtime' section indicates a solution with 484 ms runtime, beating 27.66% of other submissions. A bar chart shows the distribution of runtimes. The 'Code' section on the right contains the following MySQL query:

```
1 # Write your MySQL query statement below
2 select customer_number from Orders
3 group by customer_number
4 order by count(*) Desc
5 limit 1;
```

The 'Testcase' section shows 'Case 1' with the following input:

order_number	customer_number
1	1
2	2
3	3
4	3

The screenshot shows the LeetCode interface for problem 619. The 'Description' section on the left provides details about the 'MyNumbers' table and the task: to find the largest single number. The 'Code' section on the right contains the following MySQL query:

```
1 # Write your MySQL query statement below
2 SELECT MAX(num) as num
3 FROM mynumbers n
4 where num IN (
5     SELECT num
6     FROM mynumbers
7     GROUP BY num
8     HAVING COUNT(*)=1
9 )
```

The 'Testcase' section shows 'Case 1' with a runtime of 358 ms, beating 99.51% of other submissions.

The screenshot shows the LeetCode interface for problem 511. The 'Description' section on the left provides details about the 'Activity' table and the task: to find the first login date for each player. The 'Code' section on the right contains the following MySQL query:

```
1 # Write your MySQL query statement below
2 SELECT player_id, MIN(event_date) AS first_login
3 FROM Activity
4 GROUP BY player_id;
```

The 'Testcase' section shows 'Case 1' with a runtime of 484 ms, beating 56.28% of other submissions.

Problem List<>Submit

DescriptionSolutionsSubmissions

1693. Daily Leads and Partners

EasyTopicsCompanies

SQL Schema>Pandas Schema>

Table: DailySales

Column Name	Type
date_id	date
make_name	varchar
lead_id	int
partner_id	int

There is no primary key (column with unique values) for this table. It may contain duplicates.
This table contains the date and the name of the product sold and the IDs of the lead and partner it was sold to.
The name consists of only lowercase English letters.

For each `date_id` and `make_name`, find the number of **distinct** `lead_id`'s and **distinct** `partner_id`'s.
Return the result table in **any order**.

CodeMySQLAuto

```
1 # Write your MySQL query statement below
2 SELECT
3     date_id,
4     make_name,
5     COUNT(DISTINCT lead_id) AS unique_leads,
6     COUNT(DISTINCT partner_id) AS unique_partners
7 FROM DailySales
8 GROUP BY date_id, make_name;
```

SavedLn 8, Col 29

Editorial

Accepted<

All Submissions

Accepted22 / 22 testcases passed

Vishwajeet Salunkhe submitted at Mar 07, 2026 19:56

Solution

Runtime

528 msBeats 54.26%

Problem List<>Submit

DescriptionSolutionsSubmissions

1741. Find Total Time Spent by Each Employee

EasyTopicsCompanies

SQL Schema>Pandas Schema>

Table: Employees

Column Name	Type
emp_id	int
event_day	date
in_time	int
out_time	int

(emp_id, event_day, in_time) is the primary key (combinations of columns with unique values) of this table.
The table shows the employees' entries and exits in an office.
event_day is the day at which this event happened, in_time is the minute at which the employee entered the office, and out_time is the minute at which they left the office.
in_time and out_time are between 1 and 1440.
It is guaranteed that no two events on the same day intersect in time, and in_time < out_time.

CodeMySQLAuto

```
1 # Write your MySQL query statement below
2 SELECT
3     event_day AS day,
4     emp_id,
5     SUM(out_time - in_time) AS total_time
6 FROM Employees
7 GROUP BY event_day, emp_id;
```

SavedLn 7, Col 28

Editorial

Accepted<

All Submissions

Accepted22 / 22 testcases passed

Vishwajeet Salunkhe submitted at Mar 07, 2026 19:59

Solution

Runtime

489 msBeats 80.90%

Problem List<>Submit

DescriptionSolutionsSubmissions

1050. Actors and Directors Who Cooperated At Least Three Times

EasyTopicsCompanies

SQL Schema>Pandas Schema>

Table: ActorDirector

Column Name	Type
actor_id	int
director_id	int
timestamp	int

timestamp is the primary key (column with unique values) for this table.

Write a solution to find all the pairs (actor_id, director_id) where the actor has cooperated with the director at least three times.
Return the result table in **any order**.
The result format is in the following example.

CodeMySQLAuto

```
1 # Write your MySQL query statement below
2 SELECT actor_id, director_id
3 FROM ActorDirector
4 GROUP BY actor_id, director_id
5 HAVING COUNT(*) >= 3;
```

SavedLn 5, Col 22

Editorial

Accepted<

All Submissions

Accepted12 / 12 testcases passed

Vishwajeet Salunkhe submitted at Mar 07, 2026 20:03

Solution

Runtime

322 msBeats 97.85%

2. Joins

1378. Replace Employee ID With The Unique Identifier

Code

```
MySQL  Auto
1 # Write your MySQL query statement below
2 select eu.unique_id, em.name
3 from employees em
4 left join employeeUNI eu
5 on em.id=eu.id;
6
```

Test Result

Accepted Runtime: 116 ms

Case 1

1068. Product Sales Analysis I

Code

```
MySQL  Auto
1 # Write your MySQL query statement below
2 select p.product_name, s.year, s.price
3 from sales s inner join product p
4 on p.product_id=s.product_id;
5
```

Test Result

Accepted 13 / 13 testcases passed

Vishwajeet Salunkhe submitted at Mar 01, 2026 15:57

Runtime: 1101 ms | Beats 95.13%

577. Employee Bonus

Code

```
MySQL  Auto
1 select e.name, b.bonus
2 from employee e
3 left join bonus b
4 on e.empid=b.empid
5 having bonus <1000 or bonus is null;
6
7
```


Test Result

Accepted 21 / 21 testcases passed

Vishwajeet Salunkhe submitted at Mar 01, 2026 22:28

Runtime: 846 ms | Beats 94.21%

570. Managers with at Least 5 Direct Reports

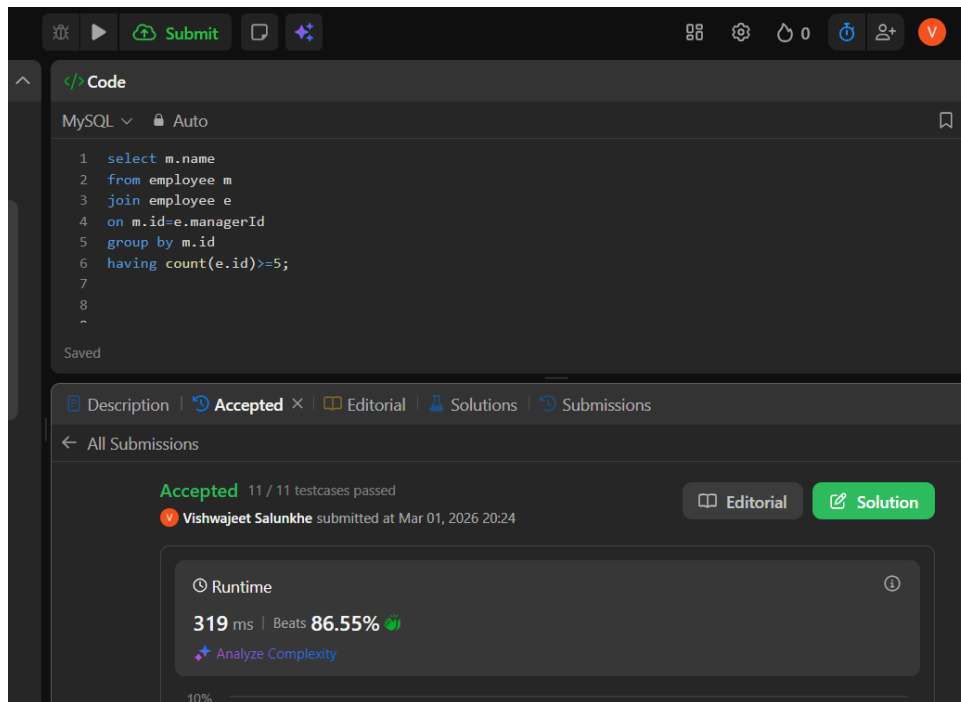

Code editor showing a MySQL query:

```
1 select m.name
2 from employee m
3 join employee e
4 on m.id=e.managerId
5 group by m.id
6 having count(e.id)>=5;
```


Accepted 11 / 11 testcases passed

Vishwajeet Salunkhe submitted at Mar 01, 2026 20:24

Runtime: 319 ms | Beats 86.55%

Analyze Complexity

1280. Students and Examinations

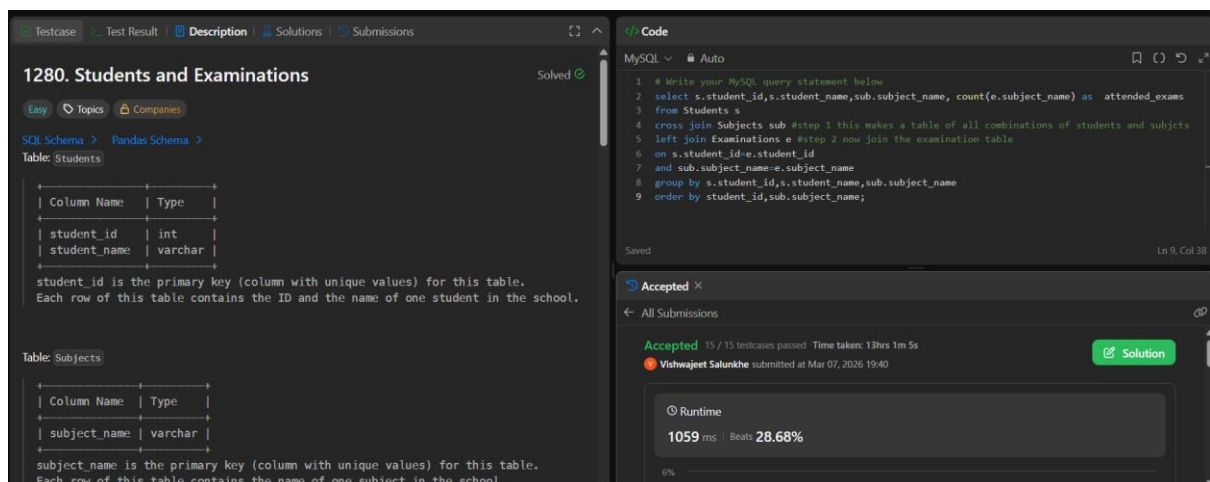

Testcase Test Result Description Solutions Submissions

1280. Students and Examinations

Easy Topics Companies

SQL Schema Pandas Schema

Table: Students

Column Name	Type
student_id	int
student_name	varchar

student_id is the primary key (column with unique values) for this table. Each row of this table contains the ID and the name of one student in the school.

Table: Subjects

Column Name	Type
subject_name	varchar

subject_name is the primary key (column with unique values) for this table. Each row of this table contains the name of one subject in the school.

Code editor showing a MySQL query:

```
1 # Write your MySQL query statement below
2 select s.student_id,s.student_name,sub.subject_name, count(e.subject_name) as attended_exams
3 from Students s
4 cross join Subjects sub #step 1 this makes a table of all combinations of students and subjects
5 left join Examinations e #step 2 now join the examination table
6 on s.student_id=e.student_id
7 and sub.subject_name=e.subject_name
8 group by s.student_id,s.student_name,sub.subject_name
9 order by student_id,sub.subject_name;
```

Accepted 15 / 15 testcases passed Time taken: 13hrs 1m 5s

Vishwajeet Salunkhe submitted at Mar 07, 2026 19:40

Runtime: 1059 ms | Beats 28.68%

3. Subquery

The screenshot shows the 'Employee Salary' problem on LeetCode. The problem description states: "Return the result table in any order. The result format is in the following example." Example 1: Input: Employee table with columns id, name, salary, managerId. Output: Employee, Joe. Explanation: Joe is the only employee who earns more than his manager.

The solution code in MySQL is:

```
1 select e.name as Employee from employee e
2 where e.salary > (select salary from employee where id=e.managerId);
3
```

The submission status is 'Accepted' with 14/14 testcases passed. Runtime is 914 ms, Beats 9.06%.

The screenshot shows the 'Customers Who Never Order' problem (183) on LeetCode. The problem description states: "id is the primary key (column with unique values) for this table. Each row of this table indicates the ID and name of a customer." The Orders table description states: "id is the primary key (column with unique values) for this table. customerId is a foreign key (customer_id) of the table Customers." The solution code in MySQL is:

```
1 SELECT c.Name AS Customers
2 FROM Customers c
3 LEFT JOIN Orders o
4 ON c.Id = o.CustomerId
5 WHERE o.CustomerId IS NULL;
6
```

The submission status is 'Accepted' with 12/12 testcases passed. Runtime is 700 ms, Beats 11.13%.

The screenshot shows the 'Rising Temperature' problem (197) on LeetCode. The problem description states: "id is the column with unique values for this table. There are no different rows with the same recordDate. This table contains information about the temperature on a certain day. Write a solution to find all dates' id with higher temperatures compared to its previous dates (yesterday). Return the result table in any order." The solution code in MySQL is:

```
1 SELECT w1.Id
2 FROM Weather w1
3 JOIN Weather w2
4 ON DATEDIFF(w1.RecordDate, w2.RecordDate) = 1
5 WHERE w1.Temperature > w2.Temperature;
6
```

The submission status is 'Accepted' with 15/15 testcases passed. Runtime is 505 ms, Beats 29.79%.

Problem List

607. Sales Person

Solved

EasyTopicsCompaniesHint

SQL SchemaPandas Schema

Table: SalesPerson

Column Name	Type
sales_id	int
name	varchar
salary	int
commission_rate	int
hire_date	date

sales_id is the primary key (column with unique values) for this table.
Each row of this table indicates the name and the ID of a salesperson alongside their salary, commission rate, and hire date.

Table: Company

Code

MySQLAuto

```
1 SELECT name
2 FROM SalesPerson
3 WHERE sales_id NOT IN (
4     SELECT sales_id
5     FROM Orders
6     WHERE com_id = (
7         SELECT com_id
8         FROM Company
9         WHERE name = 'RED'
10    )
11 );
```

Saved

Ln 1, Col 1

Accepted

All Submissions

Accepted 21 / 21 testcases passed

Vishwajeet Salunkhe submitted at Mar 09, 2026 22:30

Solution

Runtime

1340 ms | Beats 60.82%

Problem List

180. Consecutive Numbers

Solved

MediumTopicsCompanies

SQL SchemaPandas Schema

Table: Logs

Column Name	Type
id	int
num	varchar

In SQL, id is the primary key for this table.
id is an autoincrement column starting from 1.

Find all numbers that appear at least three times consecutively.

Return the result table in **any order**.

The result format is in the following example.

Code

MySQLAuto

```
1 SELECT DISTINCT l1.Num AS ConsecutiveNums
2 FROM Logs l1
3 JOIN Logs l2 ON l1.Id = l2.Id - 1
4 JOIN Logs l3 ON l1.Id = l3.Id - 2
5 WHERE l1.Num = l2.Num
6 AND l1.Num = l3.Num;
7
```

Saved

Ln 6, Col 21

Submissions

Accepted

All Submissions

Accepted 23 / 23 testcases passed Time taken: 13hrs 4m 37s

Vishwajeet Salunkhe submitted at Mar 09, 2026 22:35

Solution

Runtime

514 ms | Beats 79.77%