

LEETCODE_SUBQUERY

1.

The screenshot shows a LeetCode submission for problem 2142, "Customers Who Never Order". The submission is accepted, with a runtime of 465 ms, beating 31.49% of other solutions. The code is written in MySQL and uses a subquery to find customers who have not placed any orders. The test result shows the input data for the 'Employee' table.

Runtime: 465 ms | Beats: 31.49%

Code (MySQL):

```
1 # Write your MySQL query statement below
2 SELECT e1.name AS Employee
3 FROM Employee e1
4 JOIN Employee e2 ON e1.managerId = e2.id
5 WHERE e1.salary > e2.salary;
```

Testcase 1: Runtime: 72 ms

Input:

id	name	salary	managerId
1	Joe	70000	3
2	Henry	80000	4
3	Sam	60000	null
4	Max	90000	null

2.

The screenshot shows a LeetCode submission for problem 2142, "Customers Who Never Order". The submission is accepted, with a runtime of 548 ms, beating 89.40% of other solutions. The code is written in MySQL and uses a subquery to find customers who have not placed any orders. The test result shows the input data for the 'Customers' table.

Runtime: 548 ms | Beats: 89.40%

Code (MySQL):

```
1 # Write your MySQL query statement below
2 SELECT name as Customers
3 from Customers
4 where id not in (
5     select customerId
6     from Orders
7 );
```

Testcase 1: Runtime: 160 ms

Input:

id	name
1	Joe
2	Henry
3	Sam
4	Max

LEETCODE_SUBQUERY

3.

Problem List

Description

Editorial

Solutions

Accepted

Submissions

Accepted

13 / 15 testcases passed


pranilkan22 submitted at Sep 15, 2026 20:28

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

516 ms | Beats: 59.37%

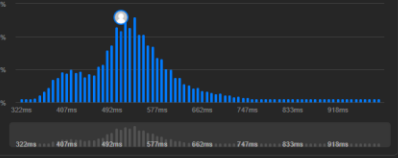

Code

MySQL

```
1 # Write your MySQL query statement below
2 SELECT w1.id
3 FROM Weather w1, Weather w2
4 WHERE DATEDIFF(w1.recordDate, w2.recordDate) = 1 AND w1.temperature > w2.temperature;
```

More challenges

597. Friend Requests I: Overall Acceptance Rate

2298. Tasks Count in the Weekend

2346. Compute the Rank as a Percentage

Testcase

Test Result

Accepted

Runtime: 68 ms

Case 1

Input

Weather =

id	recordDate	temperature
1	2015-01-01	10
2	2015-01-02	25
3	2015-01-03	20
4	2015-01-04	30

4.

Problem List

Description

Accepted

Editorial

Solutions

Submissions

Accepted

21 / 21 testcases passed

pranilkan22 submitted at Sep 15, 2026 20:29

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

2168 ms | Beats: 8.39%



Code

MySQL

```
1
2 select name
3 from SalesPerson
4 where sales_id Not in (select o.sales_id
5 from Orders o
6 join company c
7 on o.com_id=c.com_id
8 where c.name = 'Red')
```

More challenges

1159. Market Analysis II

1173. Immediate Food Delivery I

Testcase

Test Result

Accepted

Runtime: 122 ms

Case 1

Input

SalesPerson =

sales_id	name	salary	commission_rate	hire_date
1	John	100000	6	4/1/2006
2	Amy	12000	5	5/1/2010
3	Mark	65000	12	12/25/2008
4	Pam	25000	25	1/1/2005
5	Alex	5000	10	2/3/2007

LEETCODE_SUBQUERY

5.

leetcode.com/problems/consecutive-numbers/submissions/2142719549/

Problem List < > 🔍

Description Accepted x Editorial Solutions Submissions

All Submissions

Accepted 23 / 23 testcases passed
pranitikare22 submitted at Sep 15, 2026 20:31

Unlock the Full LeetCode Experience
\$583.25/mo
Save over 88%

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
569 ms | Beats 80.78%

More challenges
1173. Immediate Food Delivery I 1677. Product's Worth Over Invoices
1831. Maximum Transaction Each Day

Write your notes here

Code MySQL

```
1 SELECT distinct(t1.num) as ConsecutiveNums
2 FROM logs t1, logs t2 , logs t3
3 WHERE t1.id=t2.id+1 AND t2.id=t3.id+1 AND t1.num=t2.num AND t2.num=t3.num
```

Testcase > Test Result

Accepted Runtime: 222 ms

Case 1

Input

id	num
1	1
2	1
3	1
4	2
5	1

6.

leetcode.com/problems/combine-two-tables/

Problem List < > 🔍

Description Accepted x Editorial Solutions Submissions

All Submissions

Accepted 8 / 8 testcases passed
pranitikare22 submitted at Sep 15, 2026 20:32

Unlock the Full LeetCode Experience
\$583.25/mo
Save over 88%

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime
246 ms | Beats 74.01%

Memory
0.00 MB | Beats 100.00%

More challenges
262. Trips and Users 1633. Percentage of Users Attended a Contest
3374. First Letter Capitalization II

Write your notes here

Code PostgreSQL

```
1
2 SELECT p.firstName, p.lastName, a.city, a.state
3 FROM Person p
4 LEFT JOIN Address a
5 ON p.personId = a.personId;
```

Testcase > Test Result

Accepted Runtime: 173 ms

Case 1

Input

Person =

personId	lastName	firstName
1	Wang	Allen
2	Alice	Bob

Address =

addressId	personId	city	state
-----------	----------	------	-------

LEETCODE_SUBQUERY

7.

← → ↺ leetcode.com/problems/rank-scores/submissions/2142721591/

Problem List < > ⌕

Description Accepted × Editorial Solutions Submissions

← All Submissions

Accepted 11 / 11 testcases passed

pranilokare22 submitted at Sep 15, 2026 20:33

Solution


₹583.25 (net)

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

384 ms Beats 32.31%

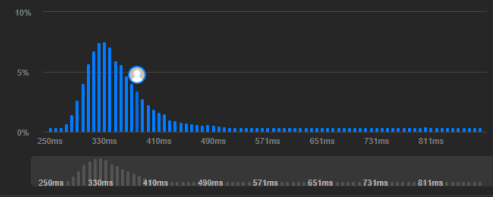

Code | MySQL

```
1 # Write your MySQL query statement below
2 SELECT S.score, COUNT(S2.SCORE) as 'rank' FROM SCORES S,
3 (SELECT DISTINCT SCORE FROM SCORES) S2
4 WHERE S.SCORE<=S2.SCORE
5 GROUP BY S.ID
6 ORDER BY S.SCORE DESC;
```

More challenges

1501. Countries You Can Safely Invest In

1633. Percentage of Users Attended a Contest

1645. Hopper Company Queries II

MySQL ↕ Auto

```
1 # Write your MySQL query statement below
2 SELECT S.score, COUNT(S2.SCORE) as 'rank' FROM SCORES S,
3 (SELECT DISTINCT SCORE FROM SCORES) S2
4 WHERE S.SCORE<=S2.SCORE
5 GROUP BY S.ID
6 ORDER BY S.SCORE DESC;
```

Saved

Testcase > Test Result

Accepted Runtime: 108 ms

Case 1

Input

Scores =

id	score
1	3.5
2	3.65
3	4
4	3.85
5	4

8.

← → ↺ leetcode.com/problems/managers-with-at-least-5-direct-reports/submissions/2142722536/

Problem List < > ⌕

Description Accepted × Editorial Solutions Submissions

← All Submissions

Accepted 11 / 11 testcases passed

pranilokare22 submitted at Sep 15, 2026 20:34

Solution


₹583.25 (net)

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

413 ms Beats 32.05%

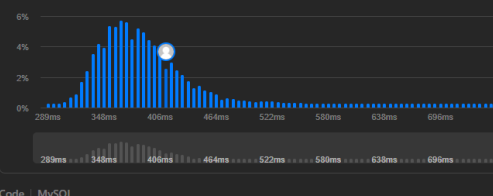

Code | MySQL

```
1 SELECT e1.name
2 FROM Employee e1
3 JOIN Employee e2
4 ON e1.id = e2.managerId
5 GROUP BY e1.id, e1.name
6 HAVING count(e1.id) >= 5
```

More challenges

620. Not Boring Movies

1484. Group Sold Products By The Date

1709. Biggest Window Between Visits

MySQL ↕ Auto

```
1 SELECT e1.name
2 FROM Employee e1
3 JOIN Employee e2
4 ON e1.id = e2.managerId
5 GROUP BY e1.id, e1.name
6 HAVING count(e1.id) >= 5
```

Saved

Testcase > Test Result

Accepted Runtime: 82 ms

Case 1

Input

Employee =

id	name	department	managerId
101	John	A	null
102	Dan	A	101
103	James	A	101
104	Amy	A	101
105	Anne	A	101

LEETCODE_SUBQUERY

9.

leetcode.com/problems/delete-duplicate-emails/submissions/2142723942/

Problem List

Description

Editorial

Solutions

Accepted

Submissions

All Submissions

Accepted

22 / 22 testcases passed

pranilokare22 submitted at Sep 15, 2026 20:36

Solution


₹583.25

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

1341 ms | Beats 5.63%

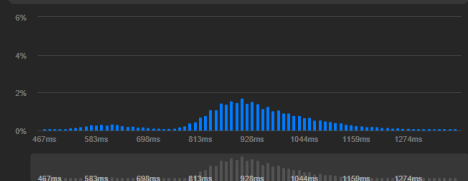

Code

MySQL

```
1 # Write your MySQL query statement below
2 DELETE p1 FROM Person p1,
3       Person p2
4 WHERE
5       p1.Email = p2.Email AND p1.Id > p2.Id
```

More challenges

176. Second Highest Salary

615. Average Salary: Departments VS Company

1990. Count the Number of Experiments

Write your notes here

MySQL

Auto

```
1 # Write your MySQL query statement below
2 DELETE p1 FROM Person p1,
3       Person p2
4 WHERE
5       p1.Email = p2.Email AND p1.Id > p2.Id
```

Saved

Testcase

Test Result

Accepted

Runtime: 69 ms

Case 1

Input

Person =

id	email
1	john@example.com
2	bob@example.com
3	john@example.com

Output

11

leetcode.com/problems/second-highest-salary/

Problem List

Description

Editorial

Solutions

Accepted

Submissions

All Submissions

Accepted

10 / 10 testcases passed

pranilokare22 submitted at Sep 15, 2026 20:37

Solution


₹583.25

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

283 ms | Beats 77.61%

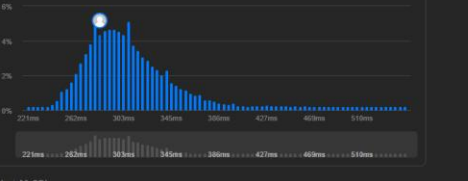

Code

MySQL

```
1
2 SELECT MAX(salary) AS SecondHighestSalary
3 FROM Employee
4 WHERE salary < (
5   SELECT MAX(salary)
6   FROM Employee
7 );
```

More challenges

1350. Students With Invalid Departments

1965. Employees With Missing Information

3475. DNA Pattern Recognition

Write your notes here

MySQL

Auto

```
1
2 SELECT MAX(salary) AS SecondHighestSalary
3 FROM Employee
4 WHERE salary < (
5   SELECT MAX(salary)
6   FROM Employee
7 );
```

Saved

Testcase

Test Result

Accepted

Runtime: 107 ms

Case 1

Case 2

Input

Employee =

id	salary
1	100
2	200
3	300

Output