LEETCODES AND HACKERRANK

1. 1378

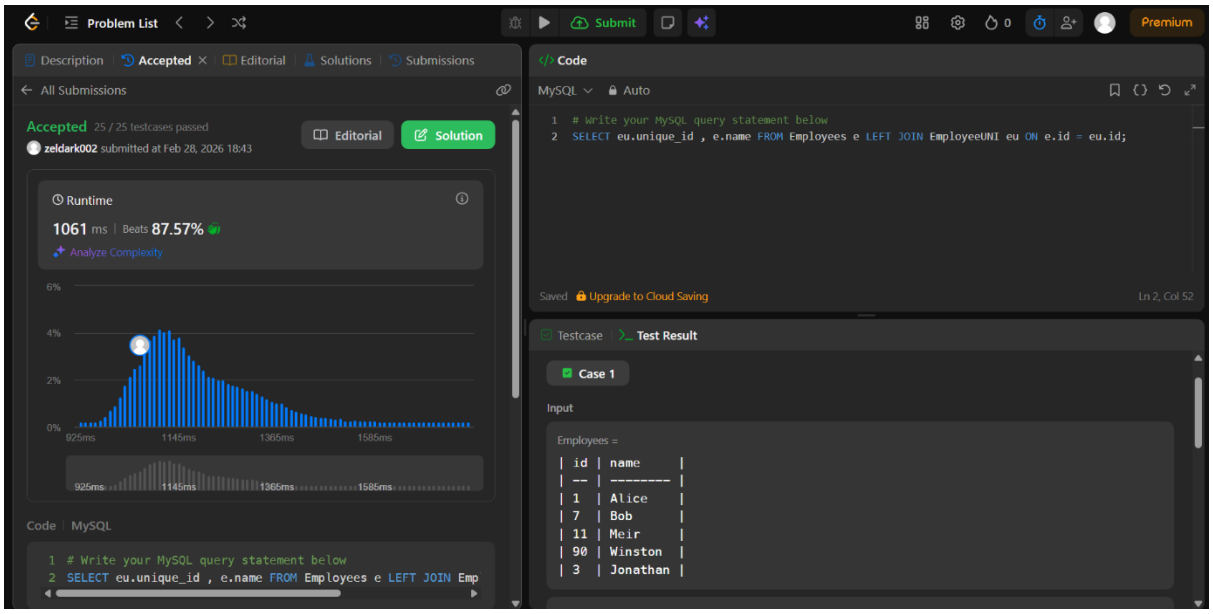

2. 619

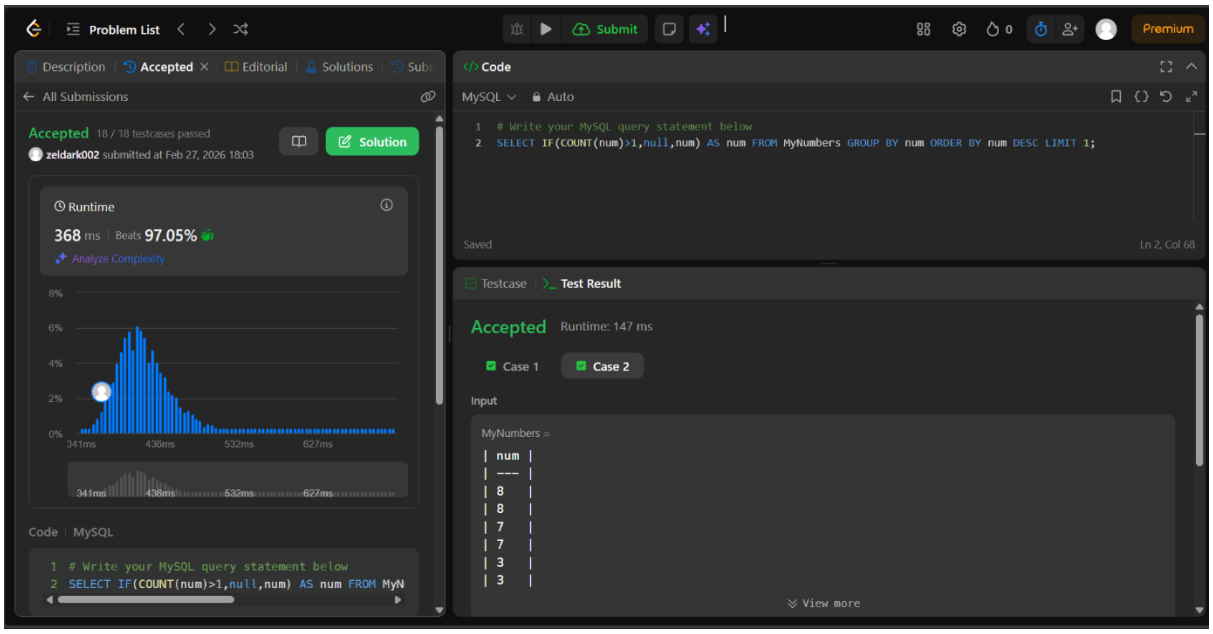

3. 596

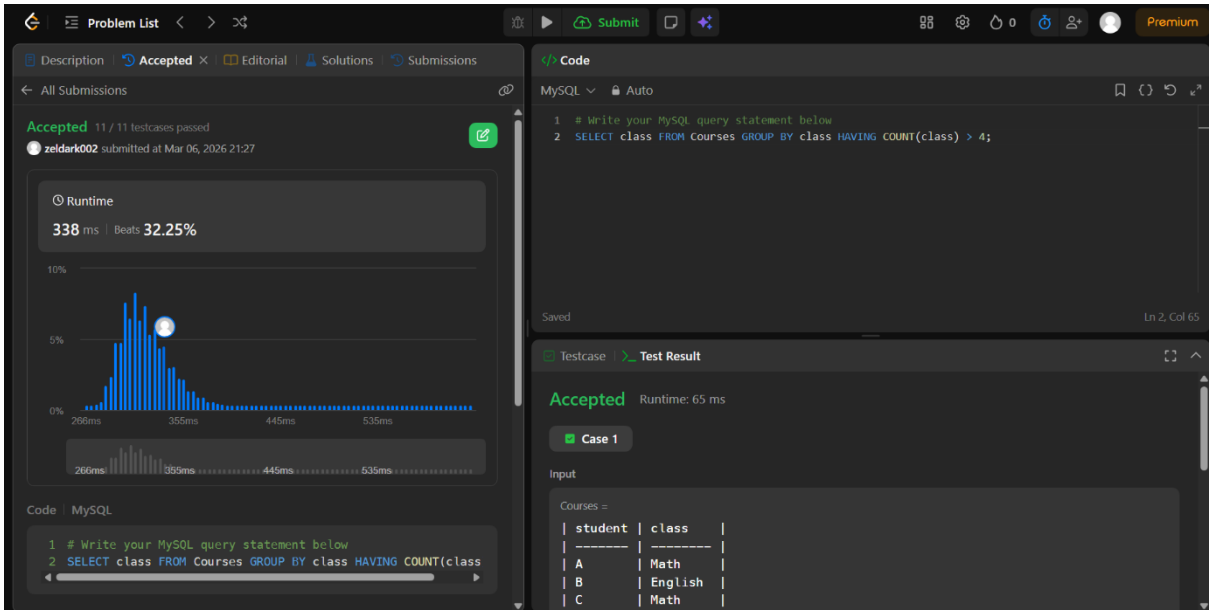

4. AVERAGE POPULATION OF EACH CONTINENT

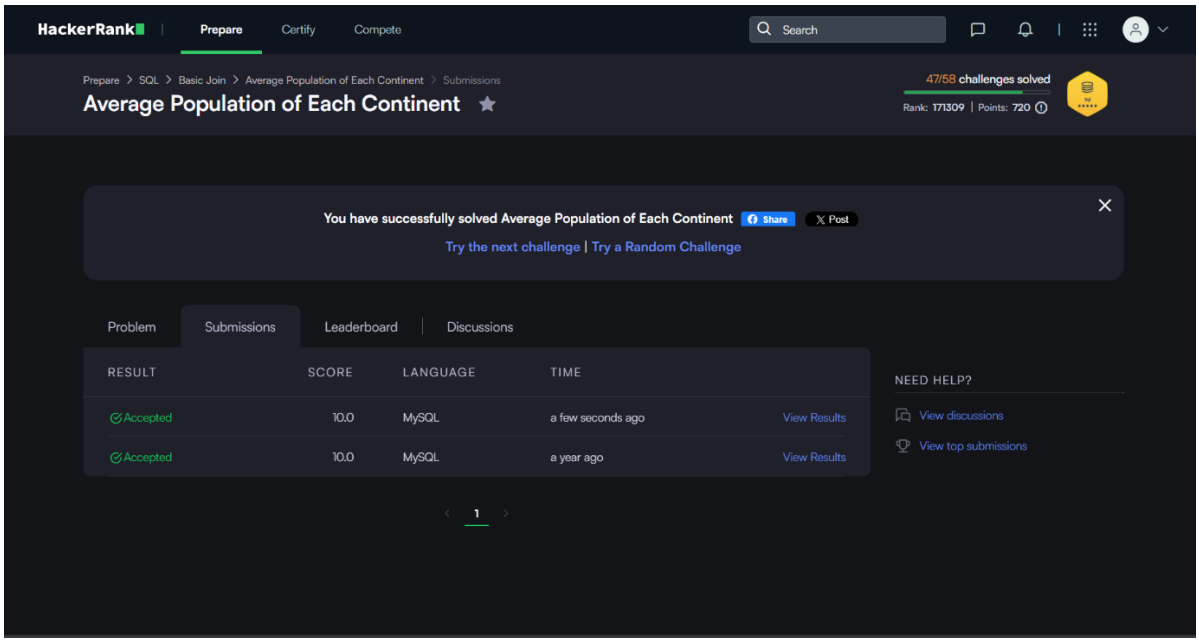

5.

POPULATION CENSUS

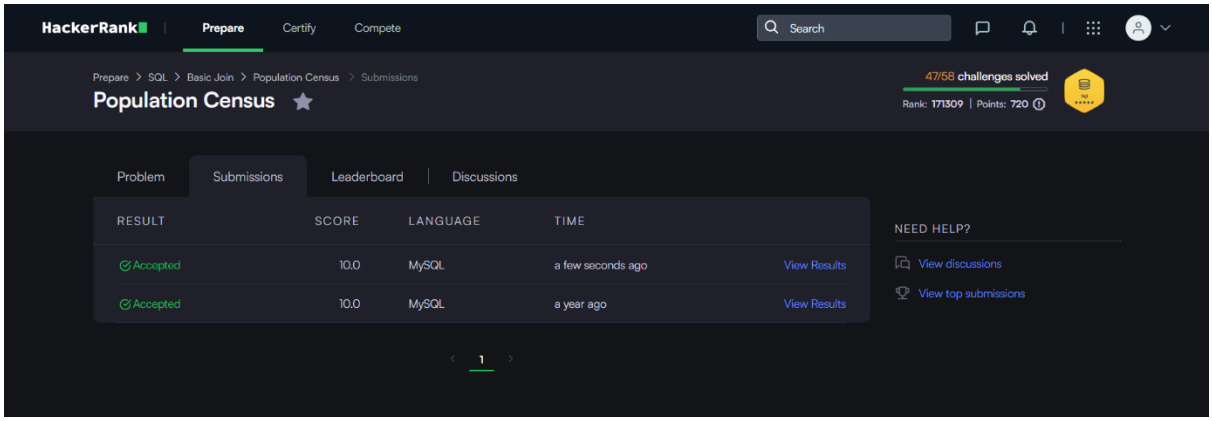
HackerRank
Prepare
Certify
Compete
Search
Prepare > SQL > Basic Join > Population Census > Submissions
Population Census
47/58 challenges solved
Rank: 171309 | Points: 720
Problem
Submissions
Leaderboard
Discussions
RESULT
SCORE
LANGUAGE
TIME
Accepted
10.0
MySQL
a few seconds ago
View Results
Accepted
10.0
MySQL
a year ago
View Results
NEED HELP?
View discussions
View top submissions
1

6. 176

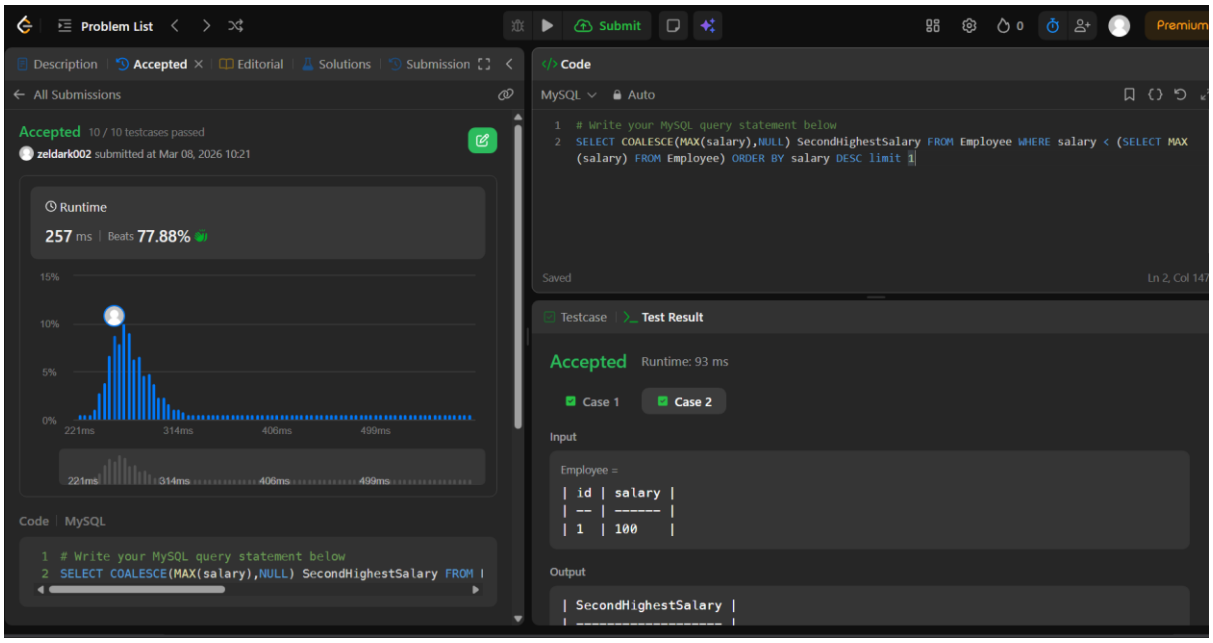
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submission
All Submissions
Accepted 10 / 10 testcases passed
zeldark002 submitted at Mar 08, 2026 10:21
Runtime
257 ms | Beats 77.88%
15%
10%
5%
0%
221ms
314ms
406ms
499ms
Code | MySQL
1 # Write your MySQL query statement below
2 SELECT COALESCE(MAX(salary),NULL) SecondHighestSalary FROM
Code
MySQL
Auto
1 # Write your MySQL query statement below
2 SELECT COALESCE(MAX(salary),NULL) SecondHighestSalary FROM Employee WHERE salary < (SELECT MAX (salary) FROM Employee) ORDER BY salary DESC limit 1
Saved
Testcase
Test Result
Accepted Runtime: 93 ms
Case 1
Case 2
Input
Employee =
id	salary
1	100
Output
SecondHighestSalary

7. 196

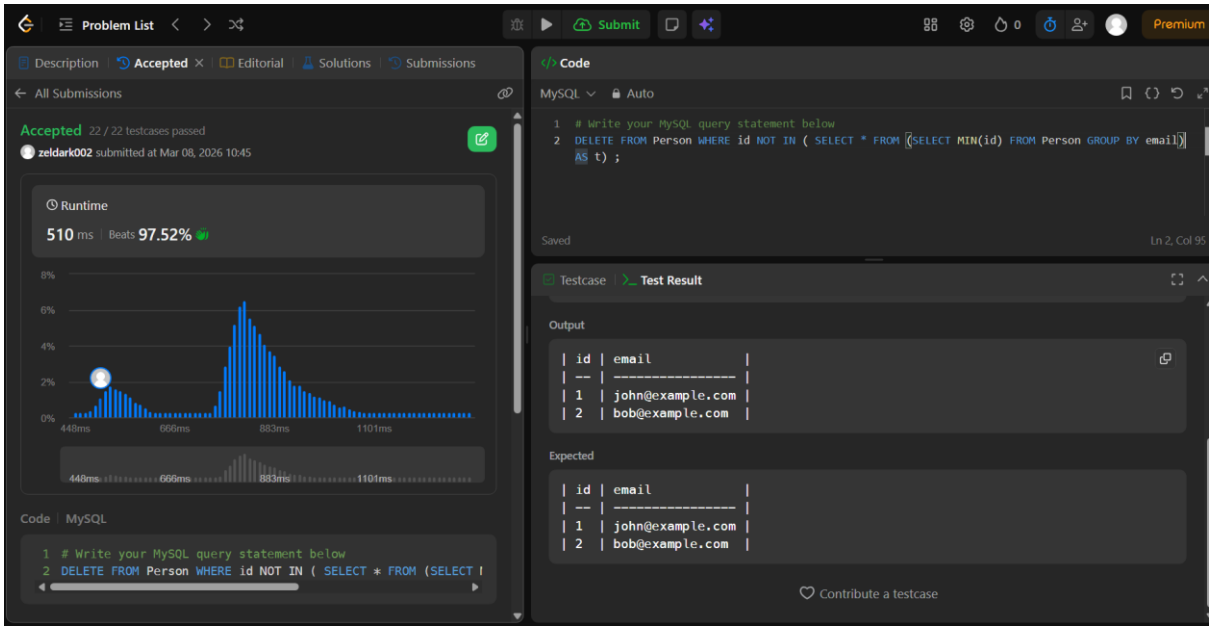
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 22 / 22 testcases passed
zeldark002 submitted at Mar 08, 2026 10:45
Runtime
510 ms | Beats 97.52%
Code | MySQL
1 # Write your MySQL query statement below
2 DELETE FROM Person WHERE id NOT IN (SELECT * FROM (SELECT I
Code
MySQL
Auto
1 # Write your MySQL query statement below
2 DELETE FROM Person WHERE id NOT IN (SELECT * FROM (SELECT MIN(id) FROM Person GROUP BY email)
AS t) ;
Saved
Ln 2, Col 95
Testcase
Test Result
Output
id	email
1	john@example.com
2	bob@example.com
Expected
id	email
1	john@example.com
2	bob@example.com
Contribute a testcase

8. 570

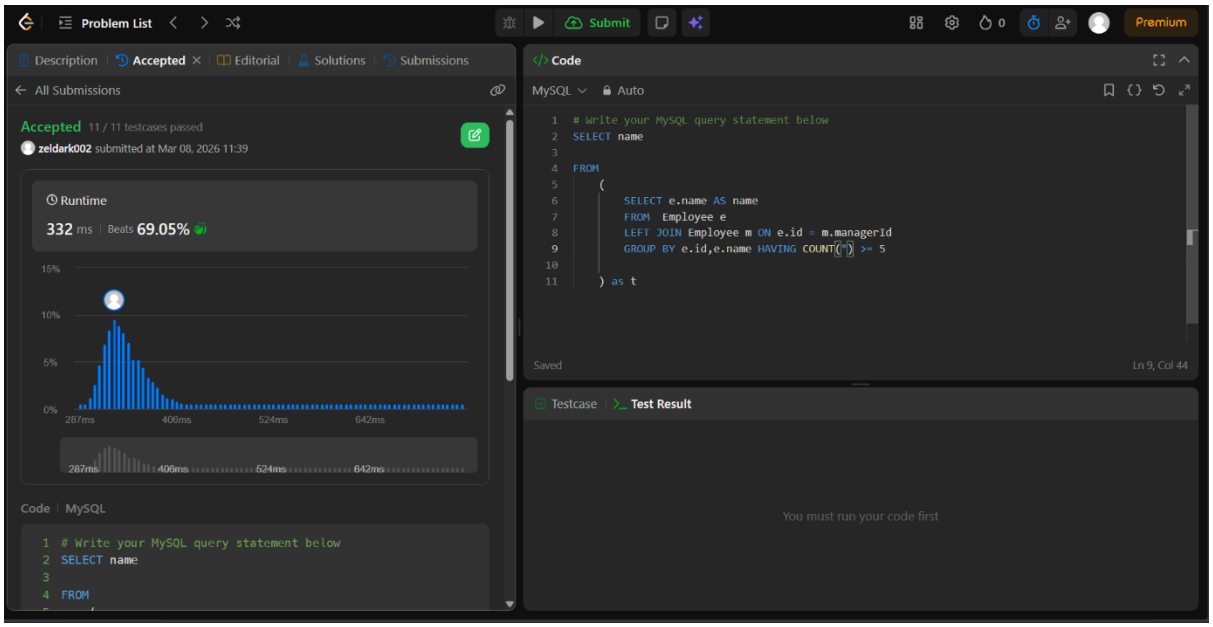
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 11 / 11 testcases passed
zeldark002 submitted at Mar 08, 2026 11:39
Runtime
332 ms | Beats 69.05%
Code | MySQL
1 # Write your MySQL query statement below
2 SELECT name
3
4 FROM
Code
MySQL
Auto
1 # Write your MySQL query statement below
2 SELECT name
3
4 FROM
5 (
6 SELECT e.name AS name
7 FROM Employee e
8 LEFT JOIN Employee m ON e.id = m.managerId
9 GROUP BY e.id,e.name HAVING COUNT(*) >= 5
10
11) as t
Saved
Ln 9, Col 44
Testcase
Test Result
You must run your code first

9. 175

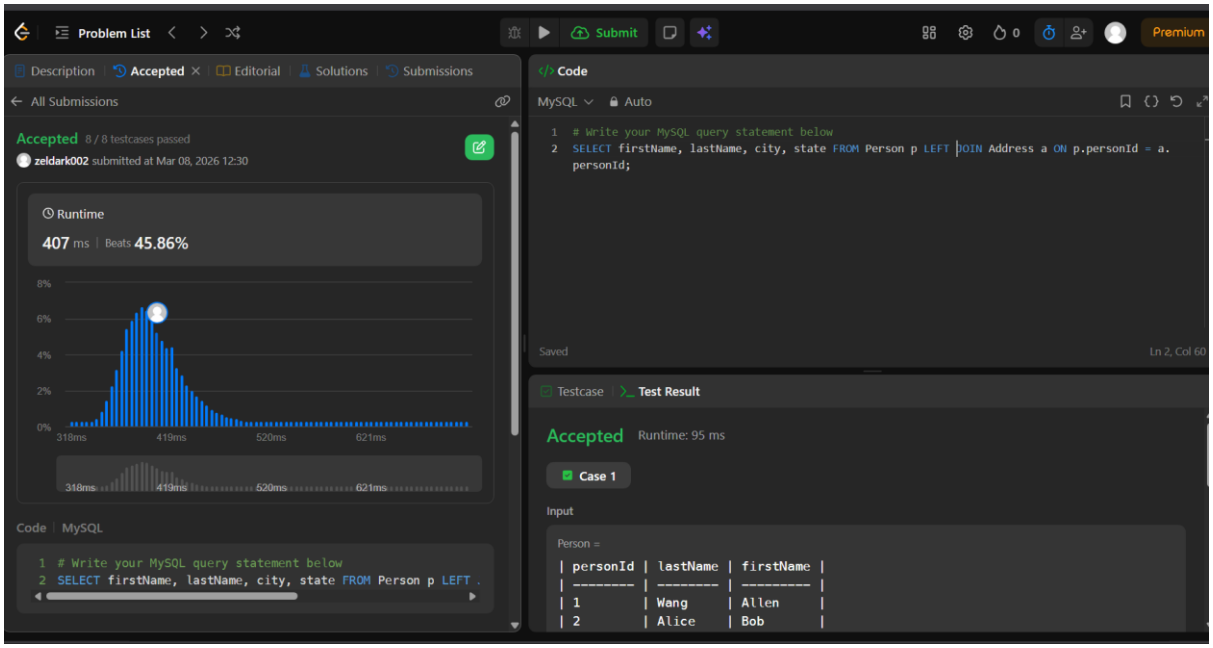

10. 178

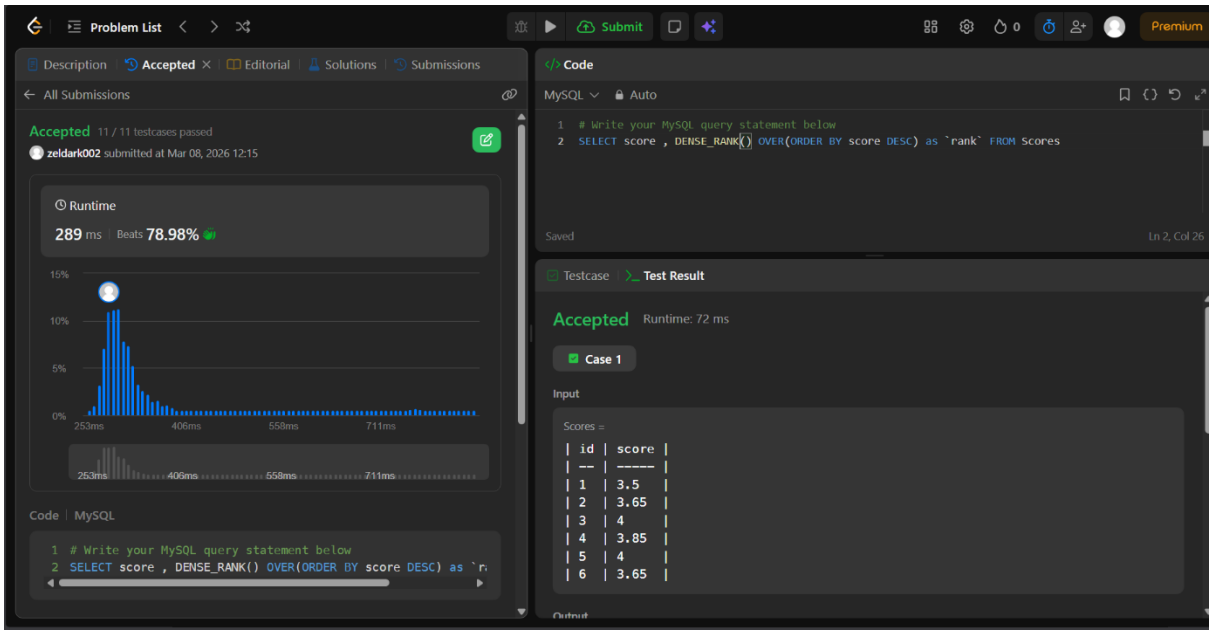

11. 180

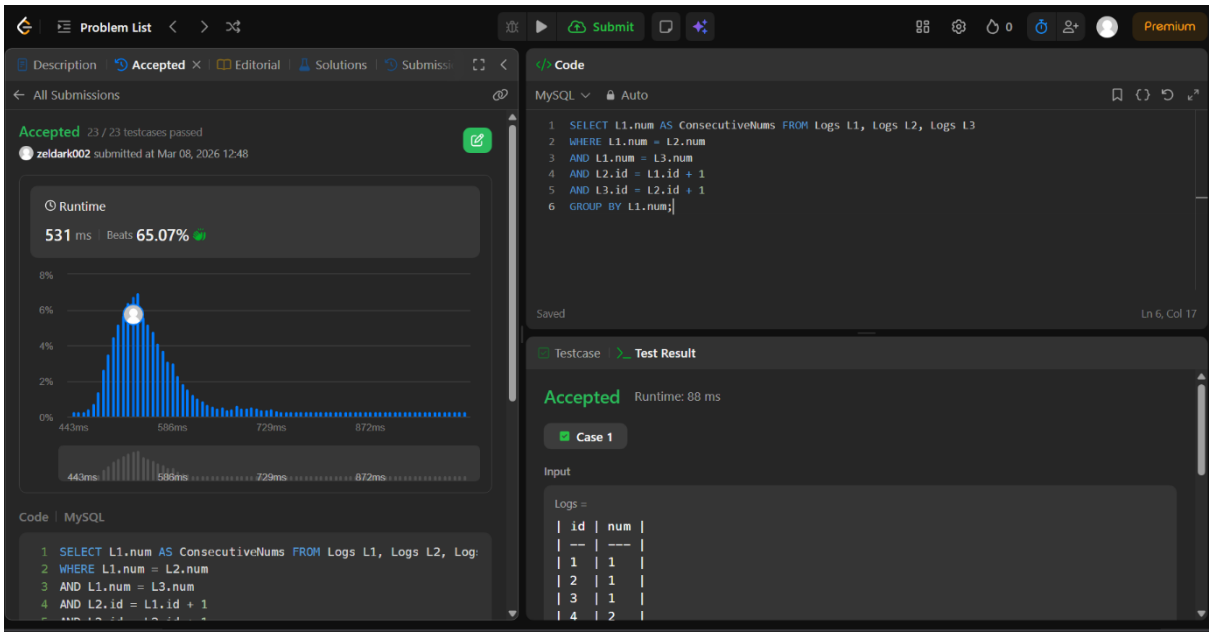
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissi
All Submissions
Accepted 23 / 23 testcases passed
zeldark002 submitted at Mar 08, 2026 12:48
Runtime
531 ms | Beats 65.07%
Code | MySQL
SELECT L1.num AS ConsecutiveNums FROM Logs L1, Logs L2, Log
WHERE L1.num = L2.num
AND L1.num = L3.num
AND L2.id = L1.id + 1
Code
MySQL
Auto
SELECT L1.num AS ConsecutiveNums FROM Logs L1, Logs L2, Logs L3
WHERE L1.num = L2.num
AND L1.num = L3.num
AND L2.id = L1.id + 1
AND L3.id = L2.id + 1
GROUP BY L1.num;
Saved
Ln 6, Col 17
Testcase
Test Result
Accepted Runtime: 88 ms
Case 1
Input
Logs =
id	num
1	1
2	1
3	1
4	2

12. 181

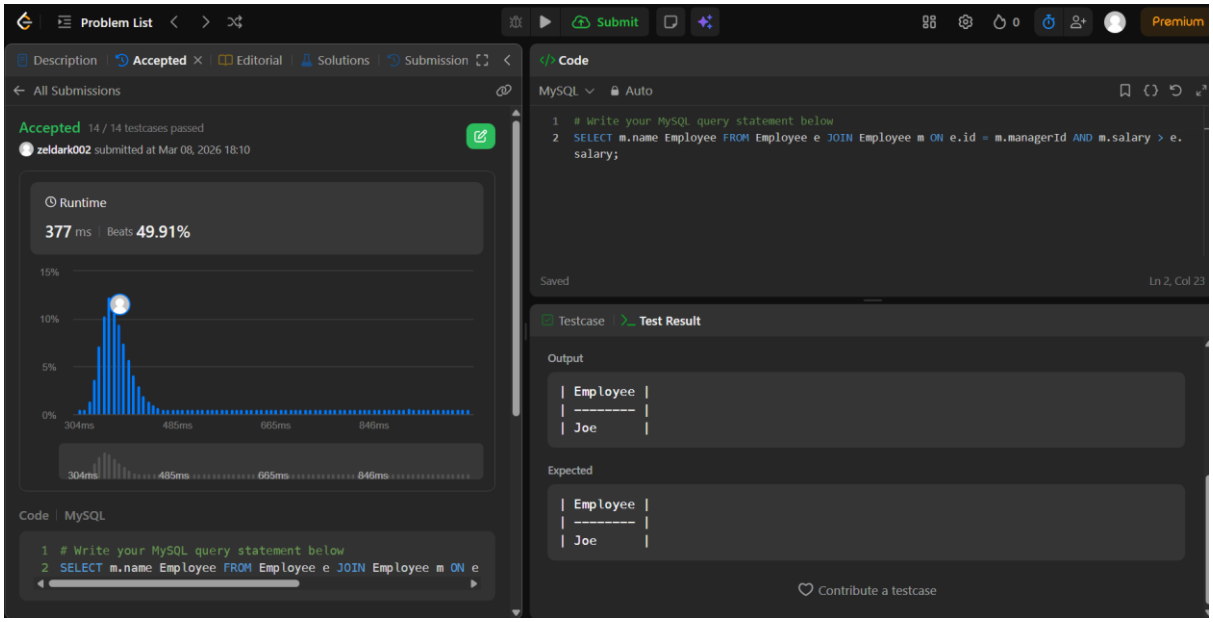
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submission
All Submissions
Accepted 14 / 14 testcases passed
zeldark002 submitted at Mar 08, 2026 18:10
Runtime
377 ms | Beats 49.91%
Code | MySQL
Write your MySQL query statement below
SELECT m.name Employee FROM Employee e JOIN Employee m ON e
Code
MySQL
Auto
Write your MySQL query statement below
SELECT m.name Employee FROM Employee e JOIN Employee m ON e.id = m.managerId AND m.salary > e.salary;
Saved
Ln 2, Col 23
Testcase
Test Result
Output
Employee
Joe
Expected
Employee
Joe
Contribute a testcase

13. 183

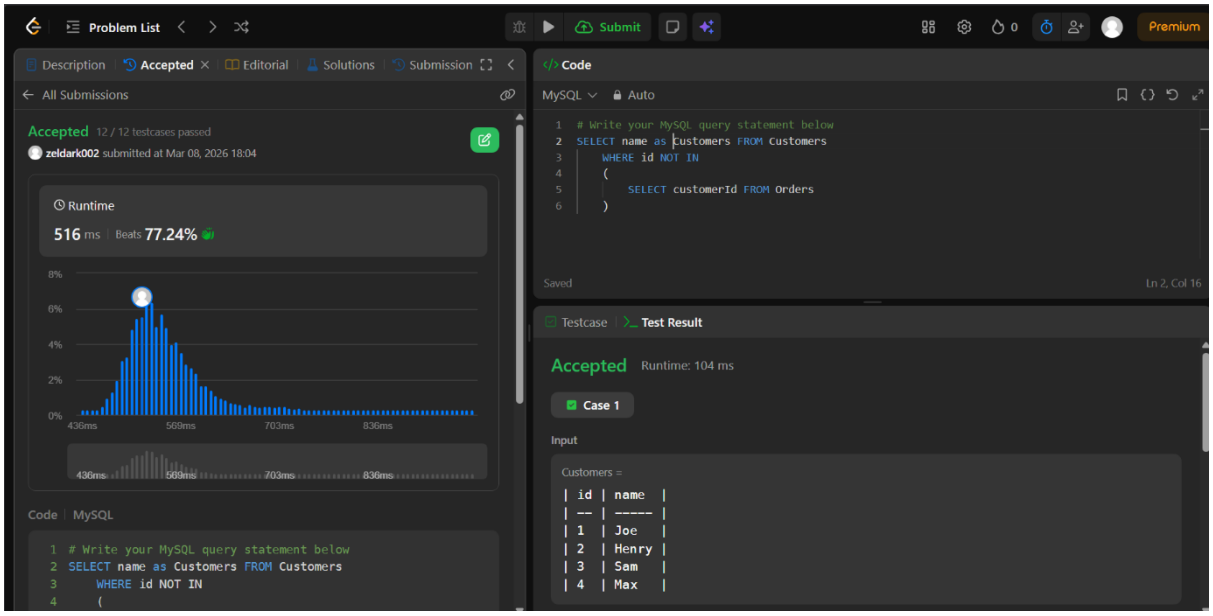
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submission
All Submissions
Accepted 12 / 12 testcases passed
zeldark002 submitted at Mar 08, 2026 18:04
Runtime
516 ms | Beats 77.24%
Code | MySQL
Write your MySQL query statement below
SELECT name as Customers FROM Customers
WHERE id NOT IN
(
Code
MySQL
Auto
Write your MySQL query statement below
SELECT name as Customers FROM Customers
WHERE id NOT IN
(
SELECT customerId FROM Orders
)
Saved
Ln 2, Col 16
Testcase
Test Result
Accepted Runtime: 104 ms
Case 1
Input
Customers =
id	name
1	Joe
2	Henry
3	Sam
4	Max

14. 197

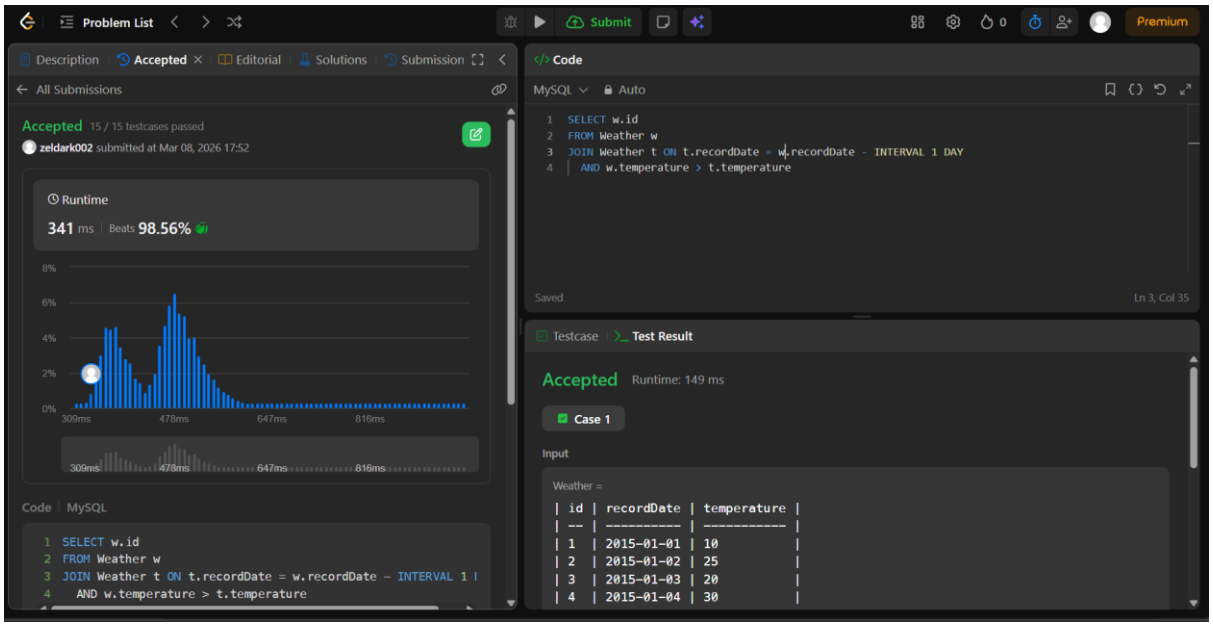
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submission
All Submissions
Accepted 15 / 15 testcases passed
zeldark002 submitted at Mar 08, 2026 17:52
Runtime
341 ms | Beats 98.56%
Code | MySQL
SELECT w.id
FROM Weather w
JOIN Weather t ON t.recordDate = w.recordDate - INTERVAL 1 DAY
AND w.temperature > t.temperature
Code
MySQL
Auto
SELECT w.id
FROM Weather w
JOIN Weather t ON t.recordDate = w.recordDate - INTERVAL 1 DAY
AND w.temperature > t.temperature
Saved
Ln 3, Col 35
Testcase
Test Result
Accepted Runtime: 149 ms
Case 1
Input
Weather =
id	recordDate	temperature
1	2015-01-01	10
2	2015-01-02	25
3	2015-01-03	20
4	2015-01-04	30

15. 607

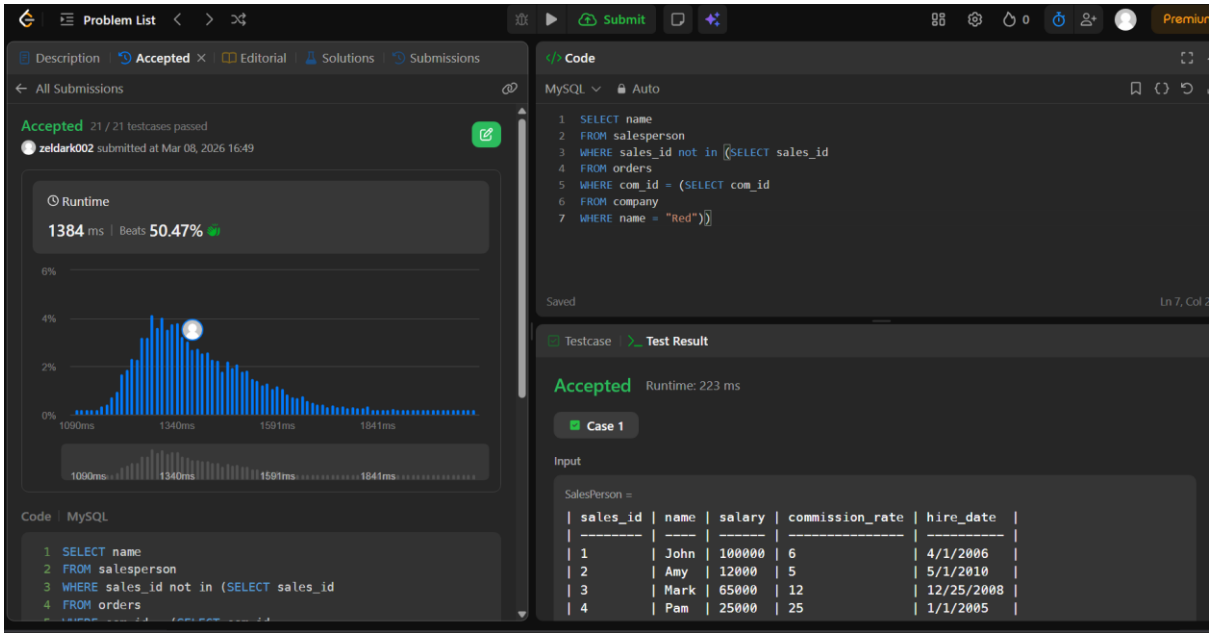

16. 577

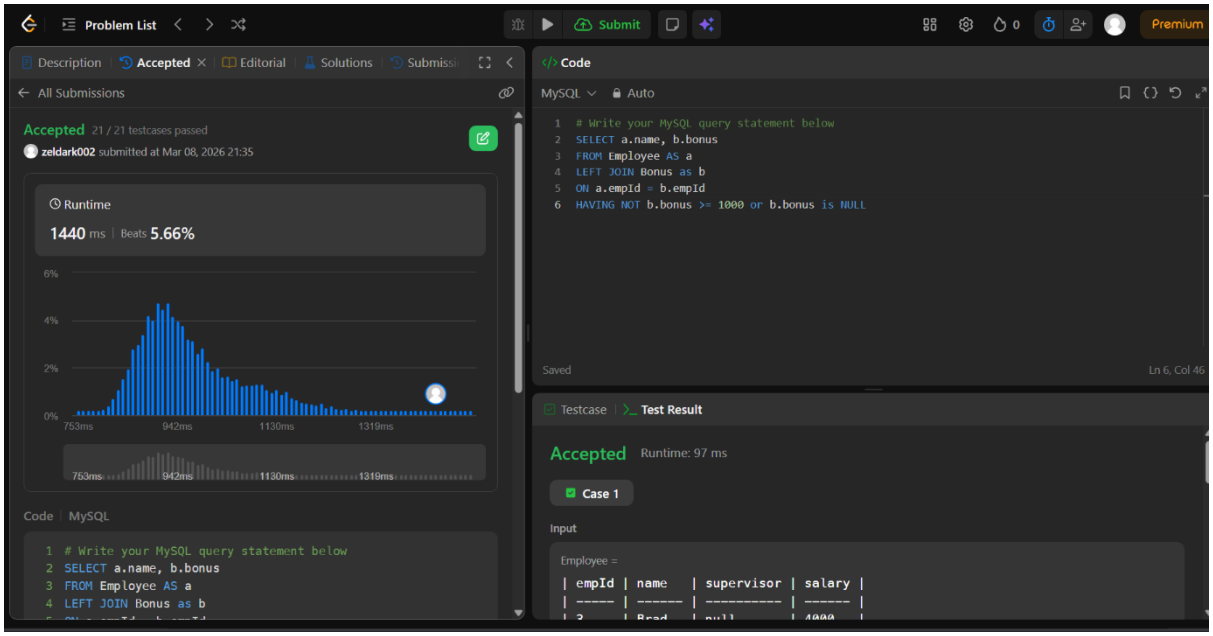

17. 1068

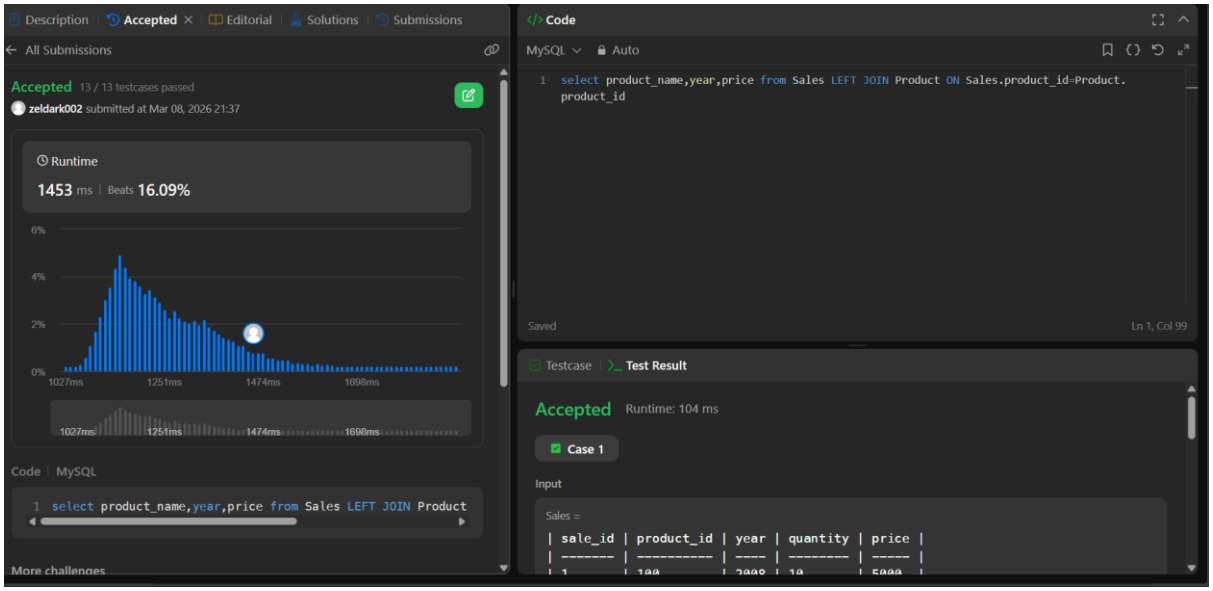

18. 1280

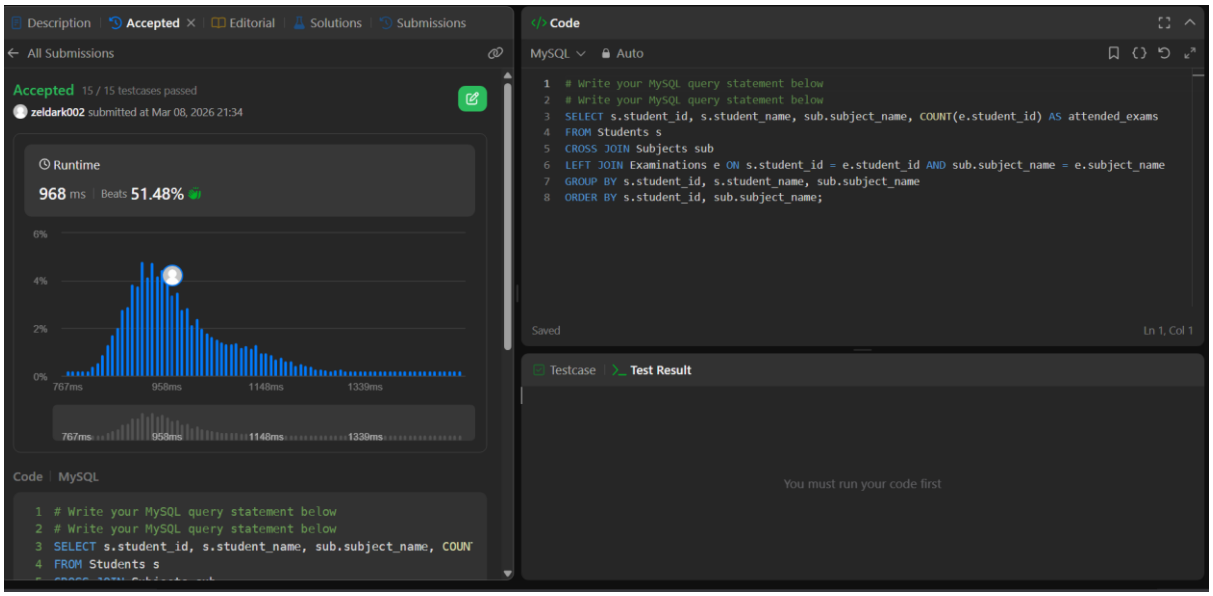

19. 511

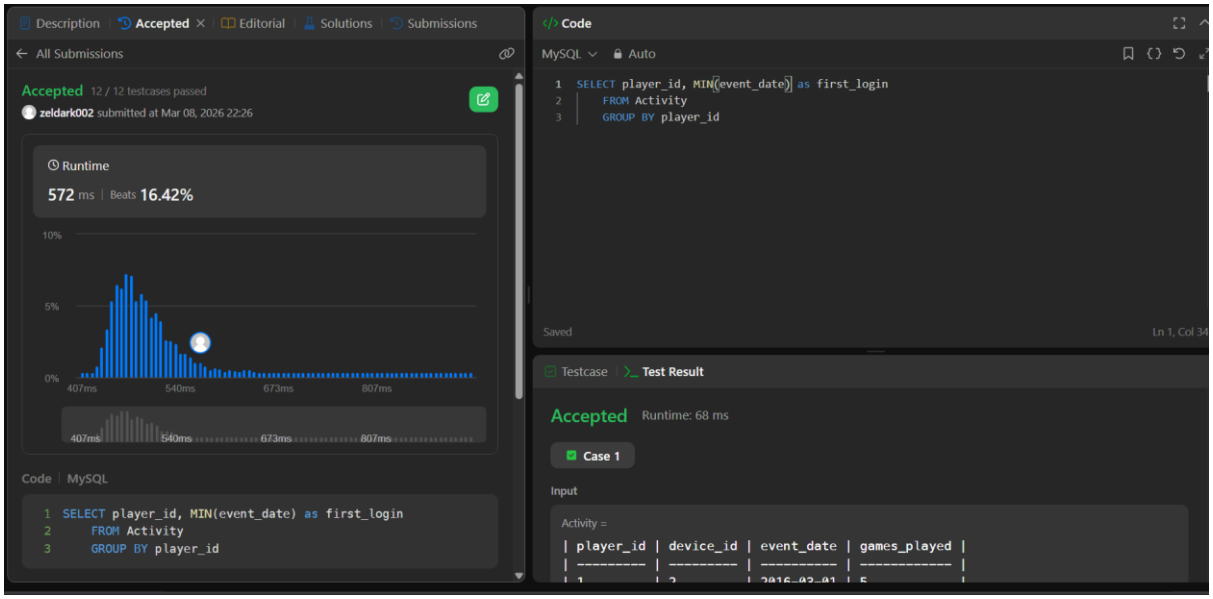

20. 586

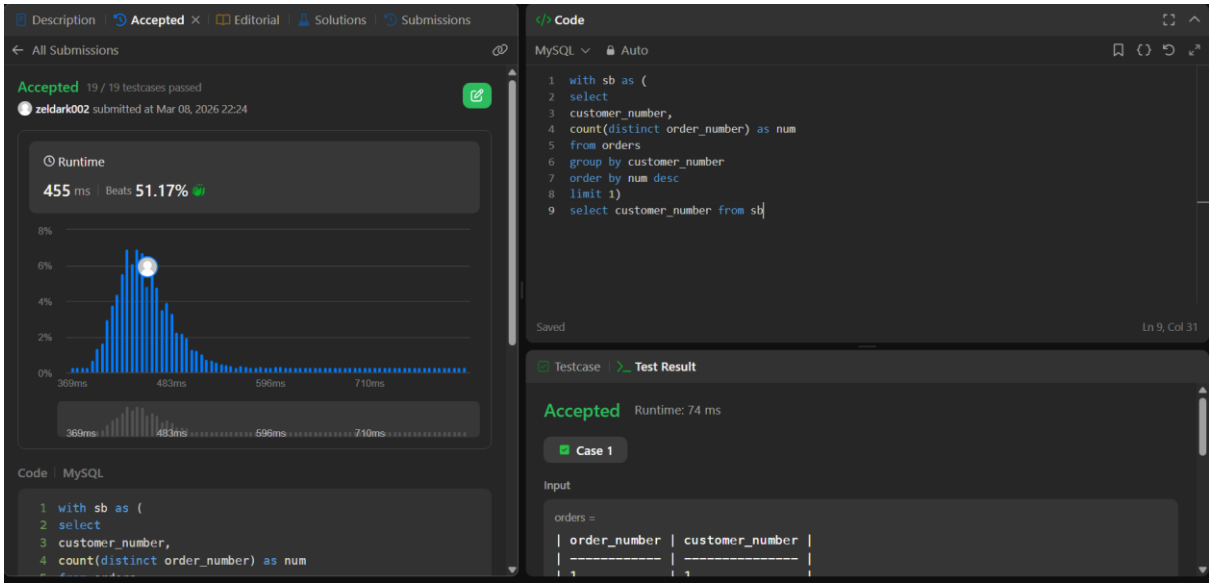

21. 1693

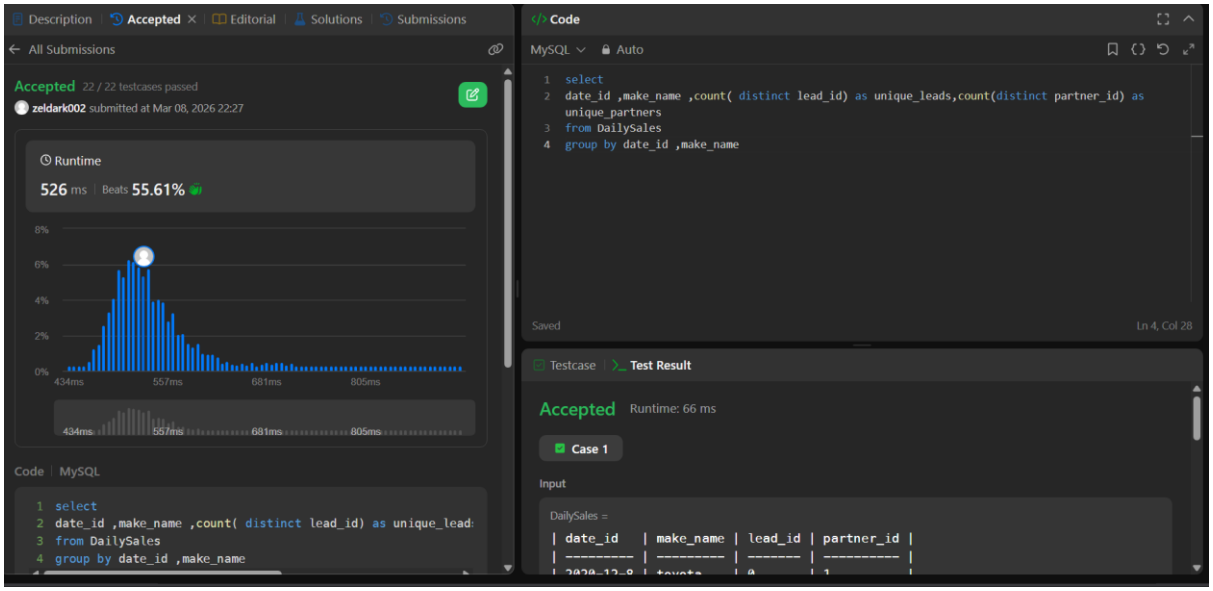

22. 1050

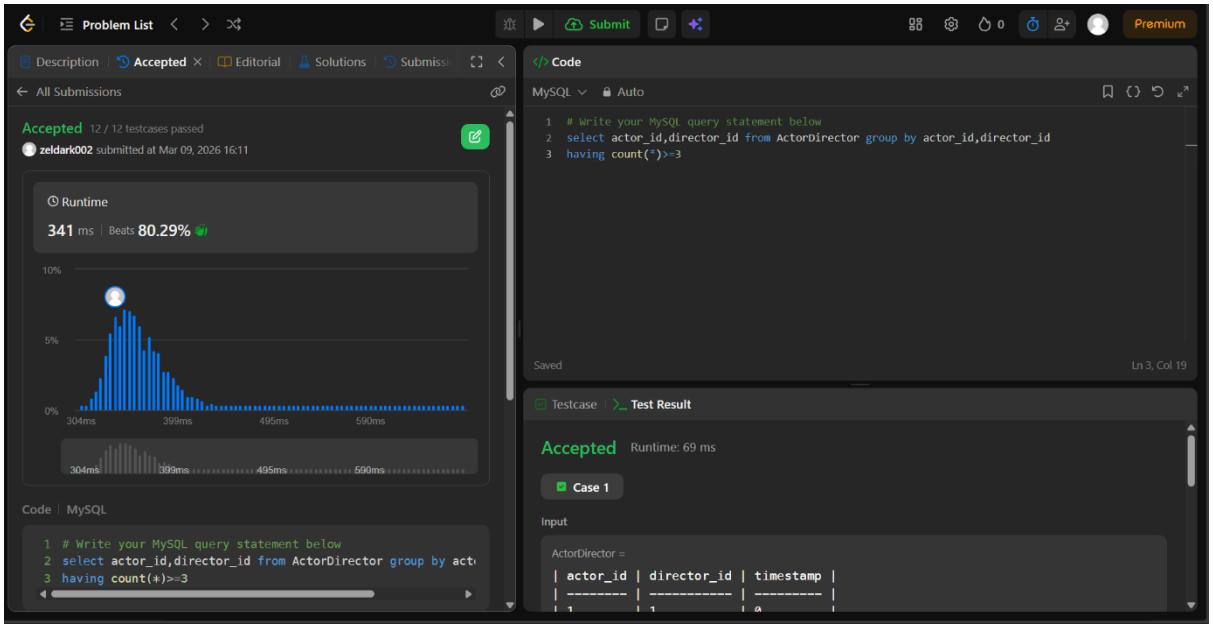

23. 1411

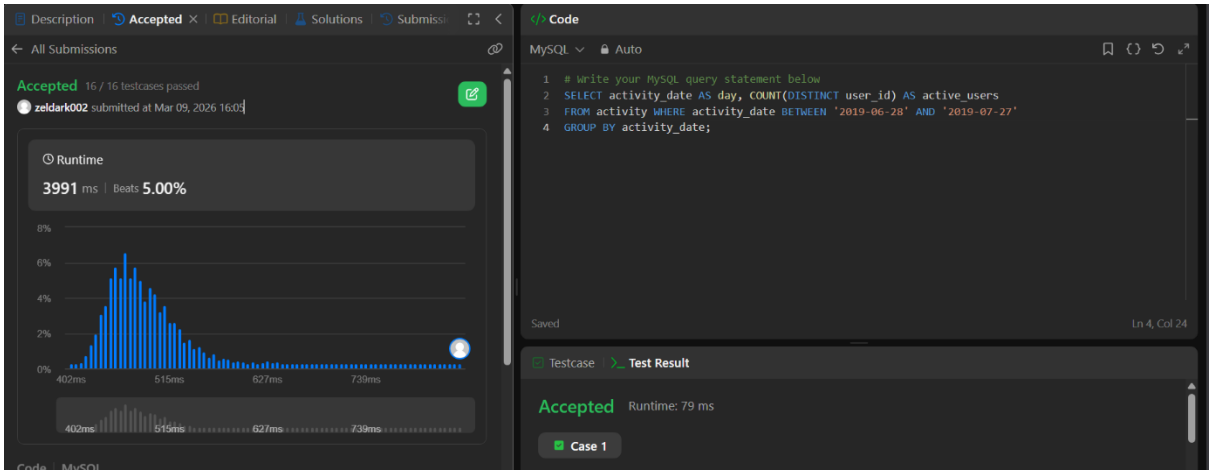
Description
Accepted
Editorial
Solutions
Submissi
All Submissions
Accepted 16 / 16 testcases passed
zeldark002 submitted at Mar 09, 2026 16:03
Runtime
3991 ms | Beats 5.00%
8%
6%
4%
2%
0%
402ms
515ms
627ms
739ms
Code
MySQL
Auto
Write your MySQL query statement below
SELECT activity_date AS day, COUNT(DISTINCT user_id) AS active_users
FROM activity WHERE activity_date BETWEEN '2019-06-28' AND '2019-07-27'
GROUP BY activity_date;
Saved
Ln 4, Col 24
Testcase
Test Result
Accepted Runtime: 79 ms
Case 1

24. 1204

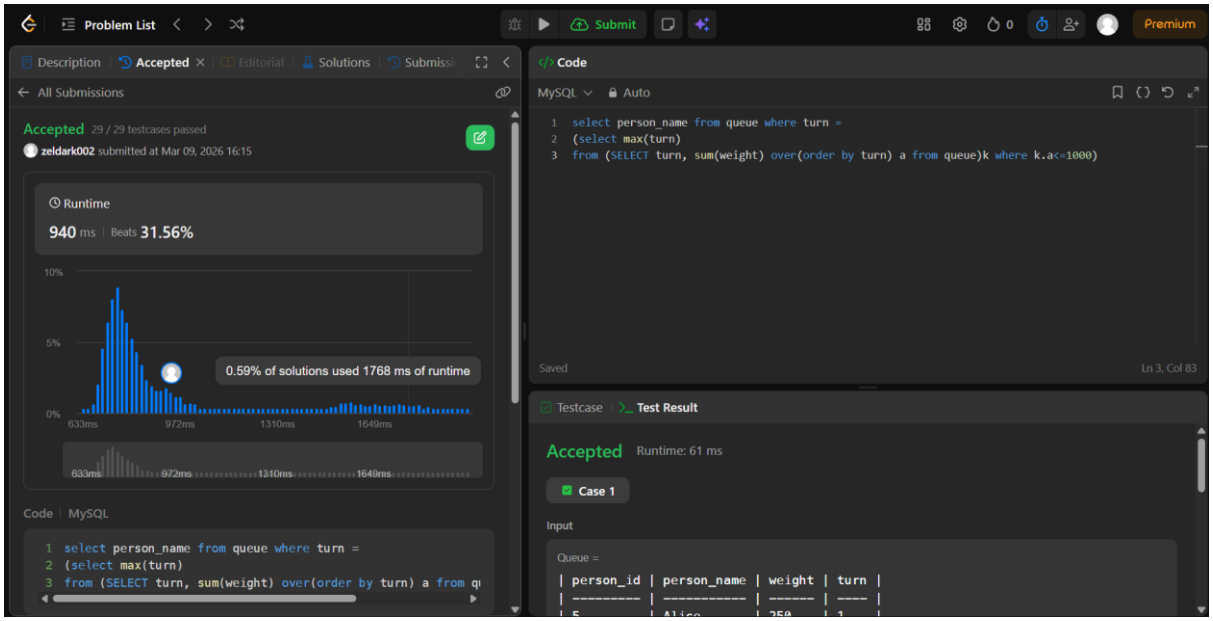
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissi
All Submissions
Accepted 29 / 29 testcases passed
zeldark002 submitted at Mar 09, 2026 16:15
Runtime
940 ms | Beats 31.56%
10%
5%
0%
633ms
972ms
1310ms
1649ms
0.59% of solutions used 1768 ms of runtime
Code | MySQL
select person_name from queue where turn =
(select max(turn)
from (SELECT turn, sum(weight) over(order by turn) a from qu
Code
MySQL
Auto
select person_name from queue where turn =
(select max(turn)
from (SELECT turn, sum(weight) over(order by turn) a from queue)k where k.a<=1000)
Saved
Ln 3, Col 83
Testcase
Test Result
Accepted Runtime: 61 ms
Case 1
Input
Queue =
| person_id | person_name | weight | turn |

25. 1211

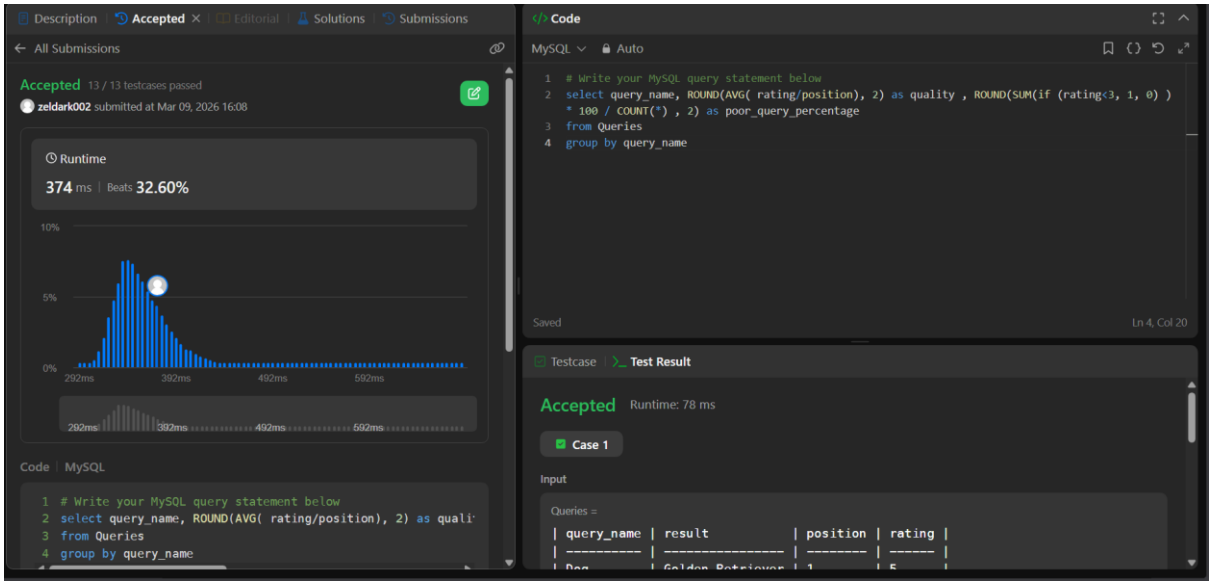

26. 1241

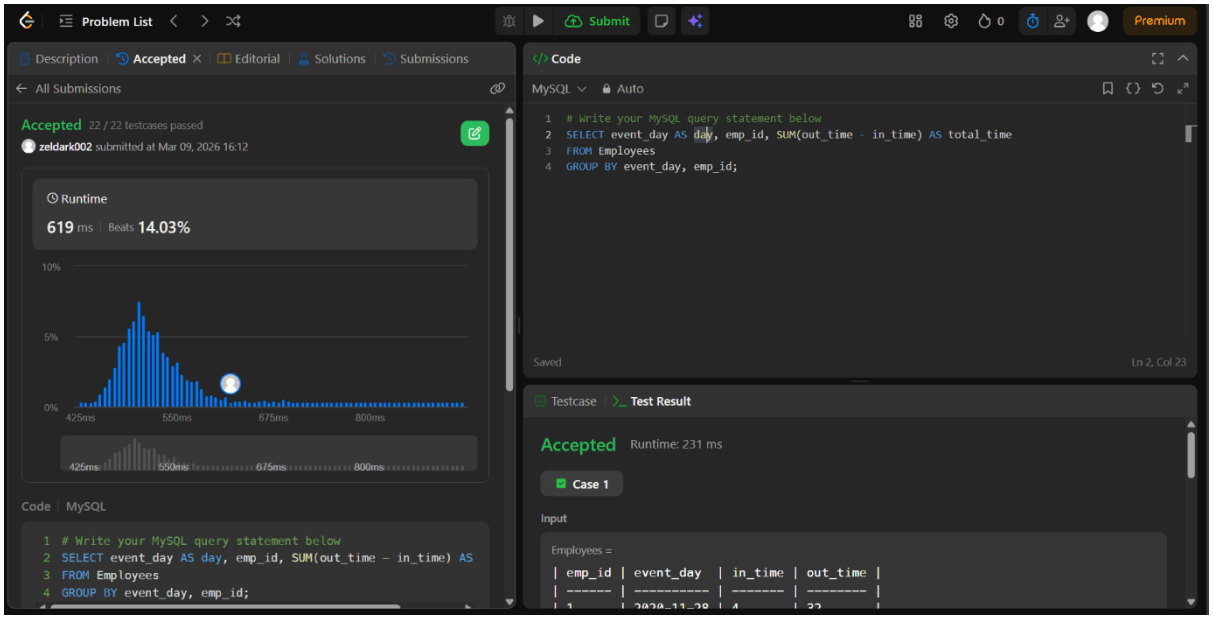

27. 1890

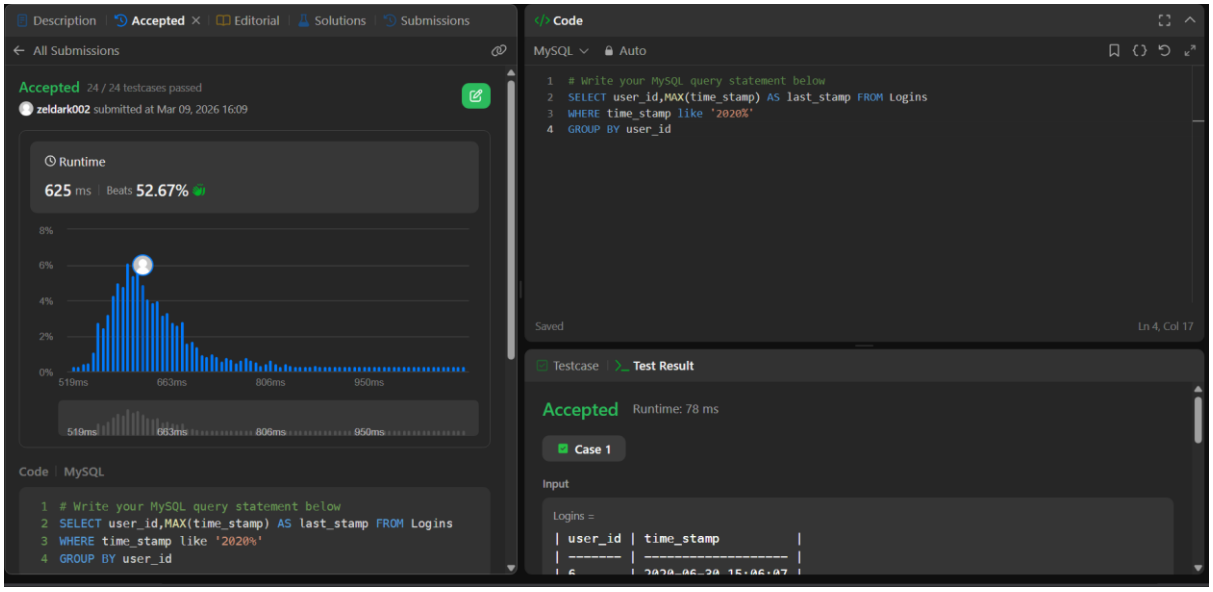
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 24 / 24 testcases passed
zeldark002 submitted at Mar 09, 2026 16:09
Runtime
625 ms | Beats 52.67%
8%
6%
4%
2%
0%
519ms
663ms
806ms
950ms
Code | MySQL
1 # Write your MySQL query statement below
2 SELECT user_id,MAX(time_stamp) AS last_stamp FROM Logins
3 WHERE time_stamp like '2020%'
4 GROUP BY user_id
Code
MySQL
Auto
1 # Write your MySQL query statement below
2 SELECT user_id,MAX(time_stamp) AS last_stamp FROM Logins
3 WHERE time_stamp like '2020%'
4 GROUP BY user_id
Saved
Ln 4, Col 17
Testcase
Test Result
Accepted
Runtime: 78 ms
Case 1
Input
Logins =
user_id	time_stamp