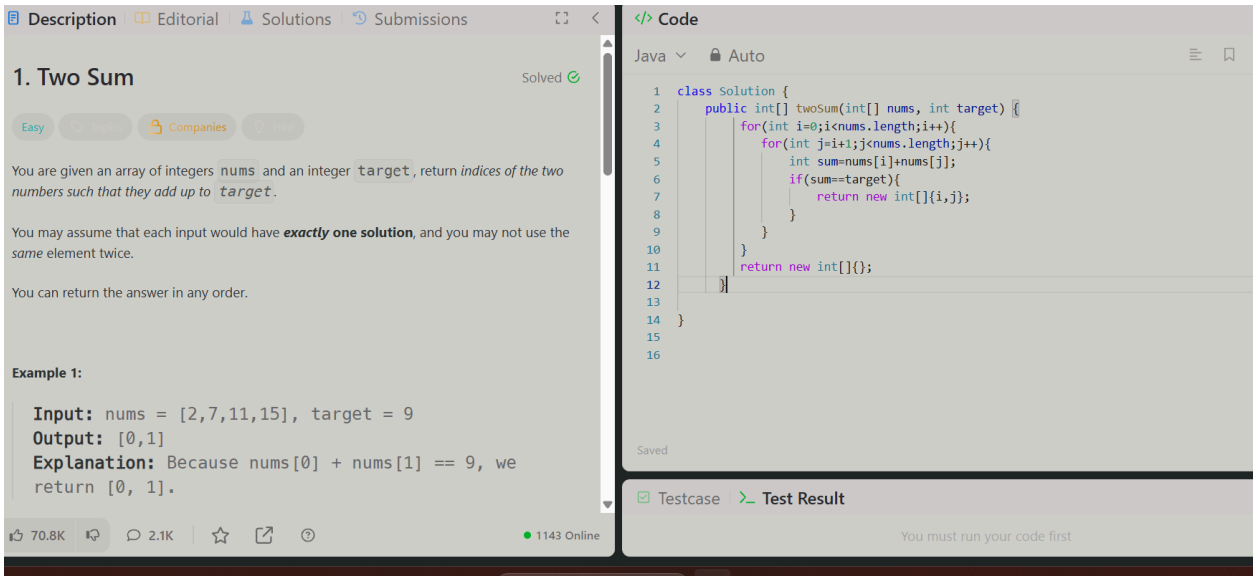
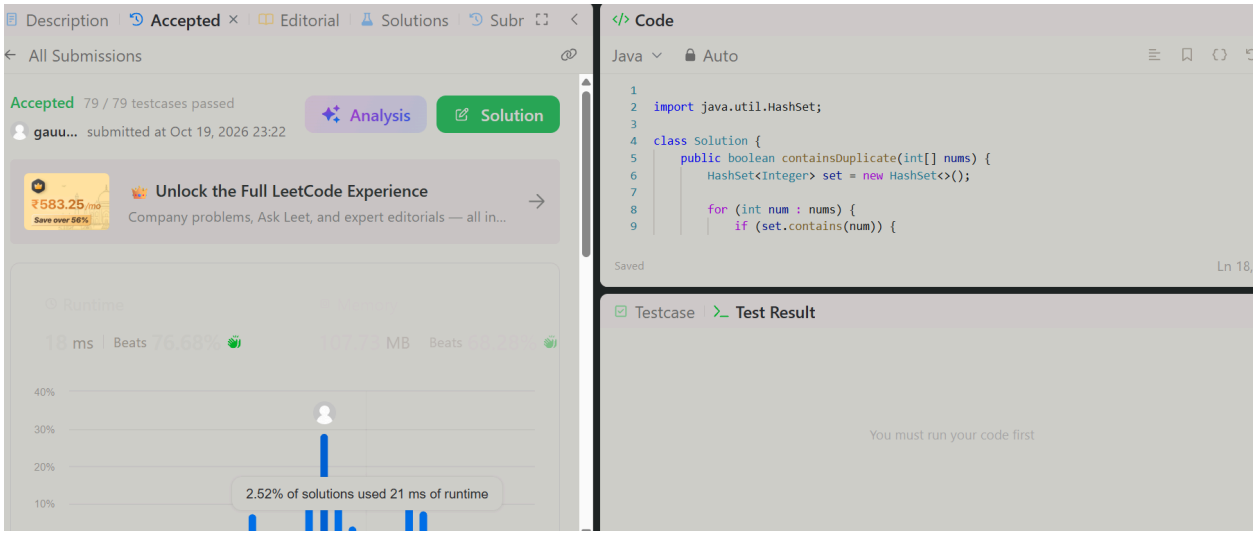

Description
Editorial
Solutions
Submissions
1. Two Sum
Solved
Easy
Companies
You are given an array of integers nums and an integer target, return indices of the two numbers such that they add up to target.
You may assume that each input would have exactly one solution, and you may not use the same element twice.
You can return the answer in any order.
Example 1:
Input: nums = [2,7,11,15], target = 9
Output: [0,1]
Explanation: Because nums[0] + nums[1] == 9, we return [0, 1].
70.8K
2.1K
1143 Online
Code
Java
Auto
class Solution {
public int[] twoSum(int[] nums, int target) {
for(int i=0;i<nums.length;i++){
for(int j=i+1;j<nums.length;j++){
int sum=nums[i]+nums[j];
if(sum==target){
return new int[]{i,j};
}
}
}
return new int[]{};
}
}
Saved
Testcase
Test Result
You must run your code first


Description
Accepted
Editorial
Solutions
All Submissions
Accepted 79 / 79 testcases passed
gauu... submitted at Oct 19, 2026 23:22
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in...
Runtime
18 ms
Beats 76.68%
Memory
107.75 MB
40%
30%
20%
10%
2.52% of solutions used 21 ms of runtime
Code
Java
Auto
import java.util.HashSet;
class Solution {
public boolean containsDuplicate(int[] nums) {
HashSet<Integer> set = new HashSet<>();
for (int num : nums) {
if (set.contains(num)) {
Saved
Testcase
Test Result
You must run your code first