Assignment No 6

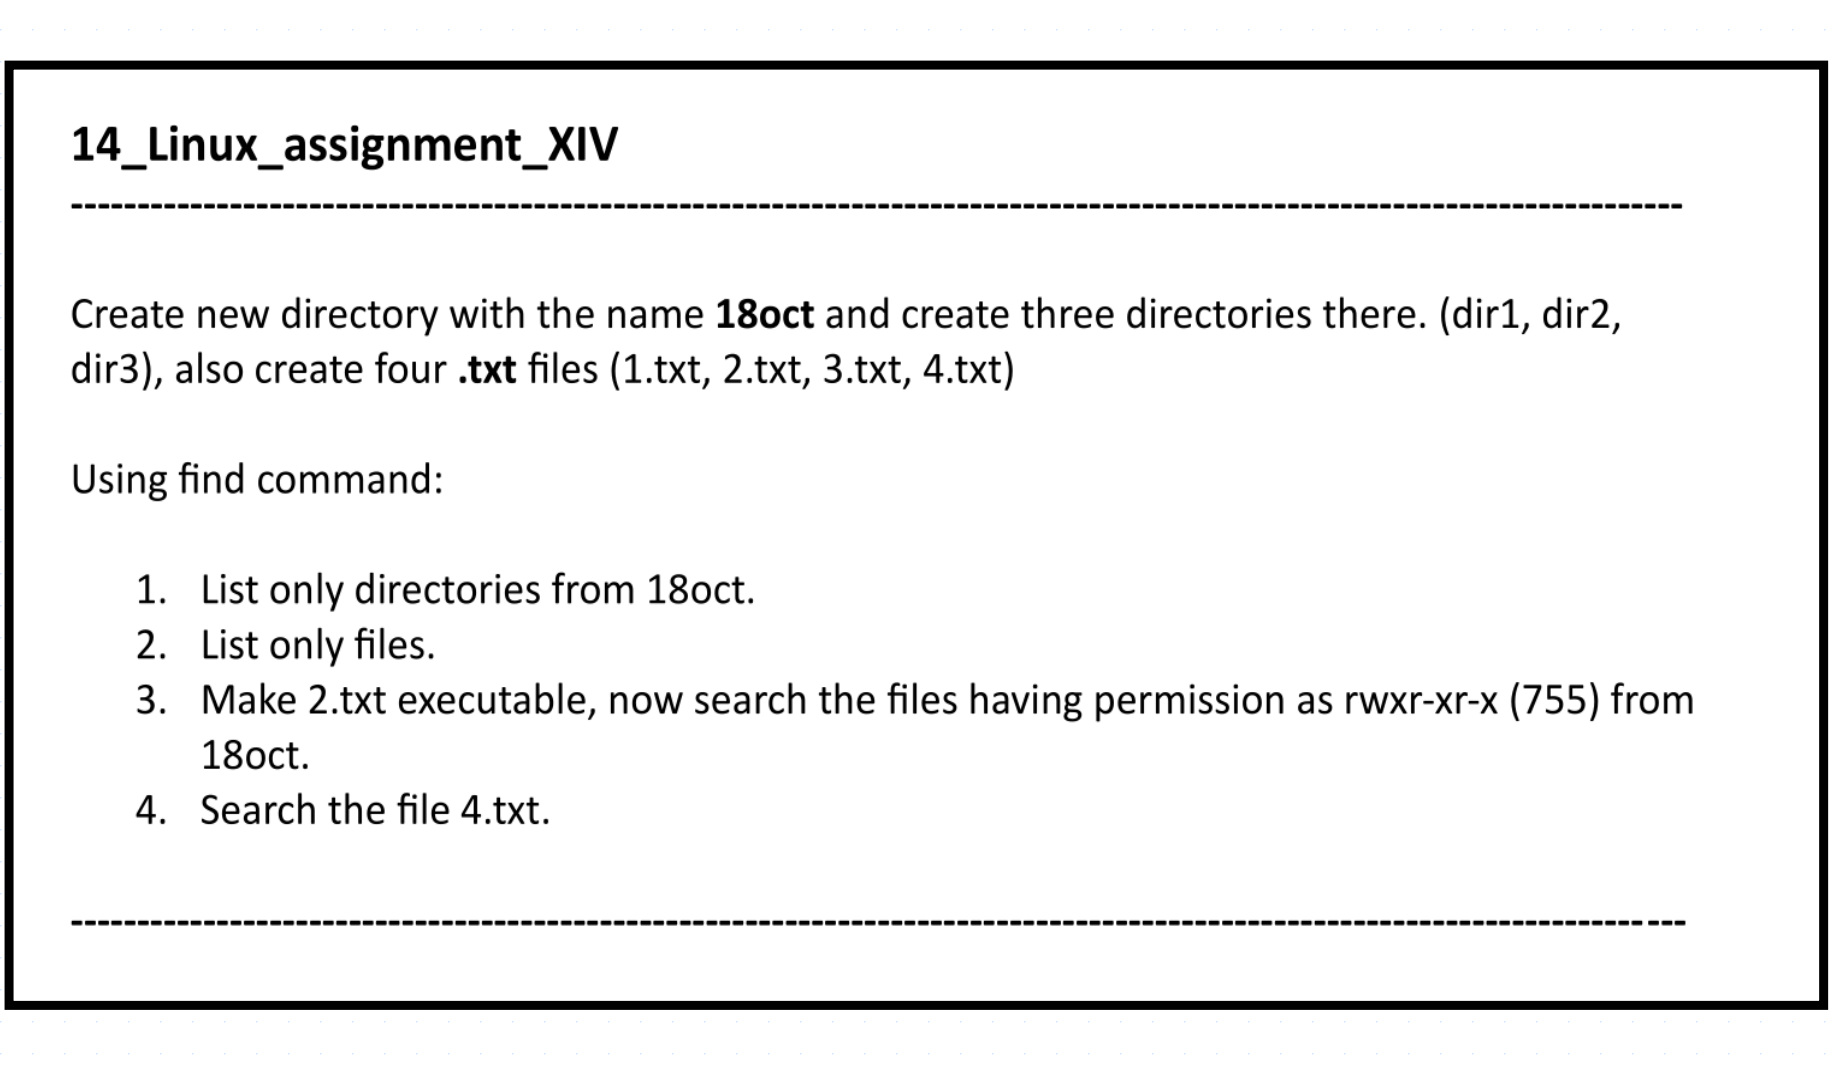

14_Linux_assignment_XIV

Create new directory with the name **18oct** and create three directories there. (dir1, dir2, dir3), also create four **.txt** files (1.txt, 2.txt, 3.txt, 4.txt)

Using find command:

1. List only directories from 18oct.
2. List only files.
3. Make 2.txt executable, now search the files having permission as rwxr-xr-x (755) from 18oct.
4. Search the file 4.txt.

----

mkdir -p 18oct/dir1 18oct/dir2 18oct/dir3 && touch 18oct/{1,2,3,4}.txt

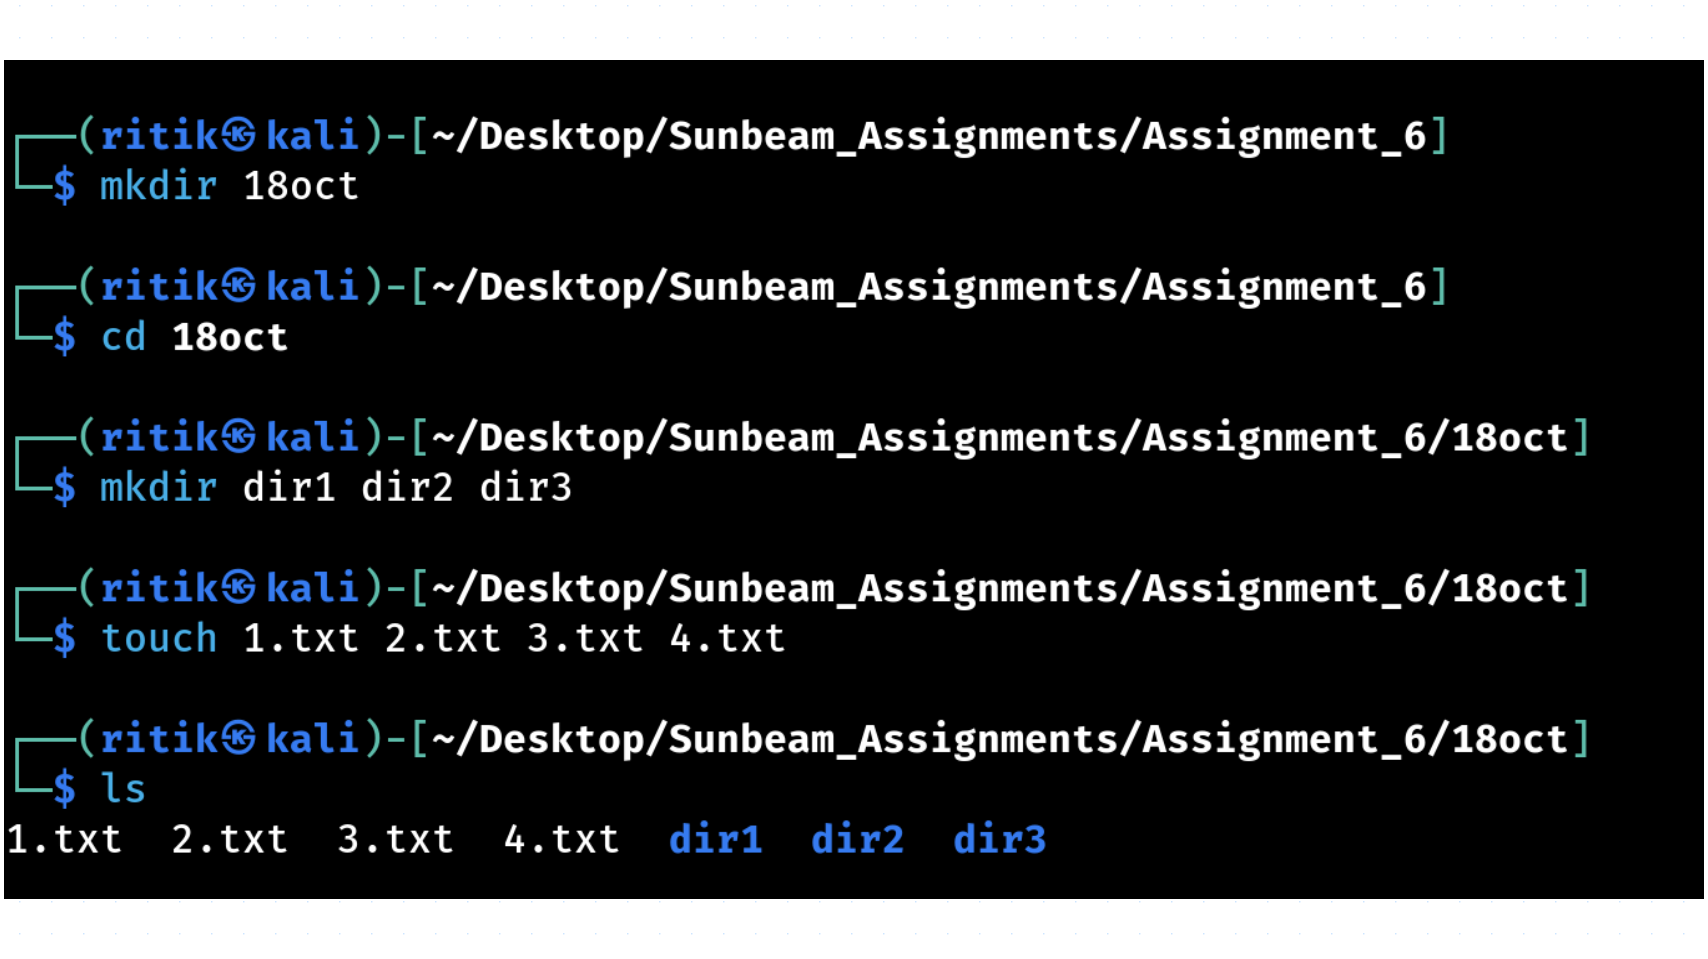

```
┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ mkdir 18oct

┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ cd 18oct

┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6/18oct]
└─$ mkdir dir1 dir2 dir3

┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6/18oct]
└─$ touch 1.txt 2.txt 3.txt 4.txt

┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6/18oct]
└─$ ls
1.txt  2.txt  3.txt  4.txt  dir1  dir2  dir3
```

1. List only directories from 18oct

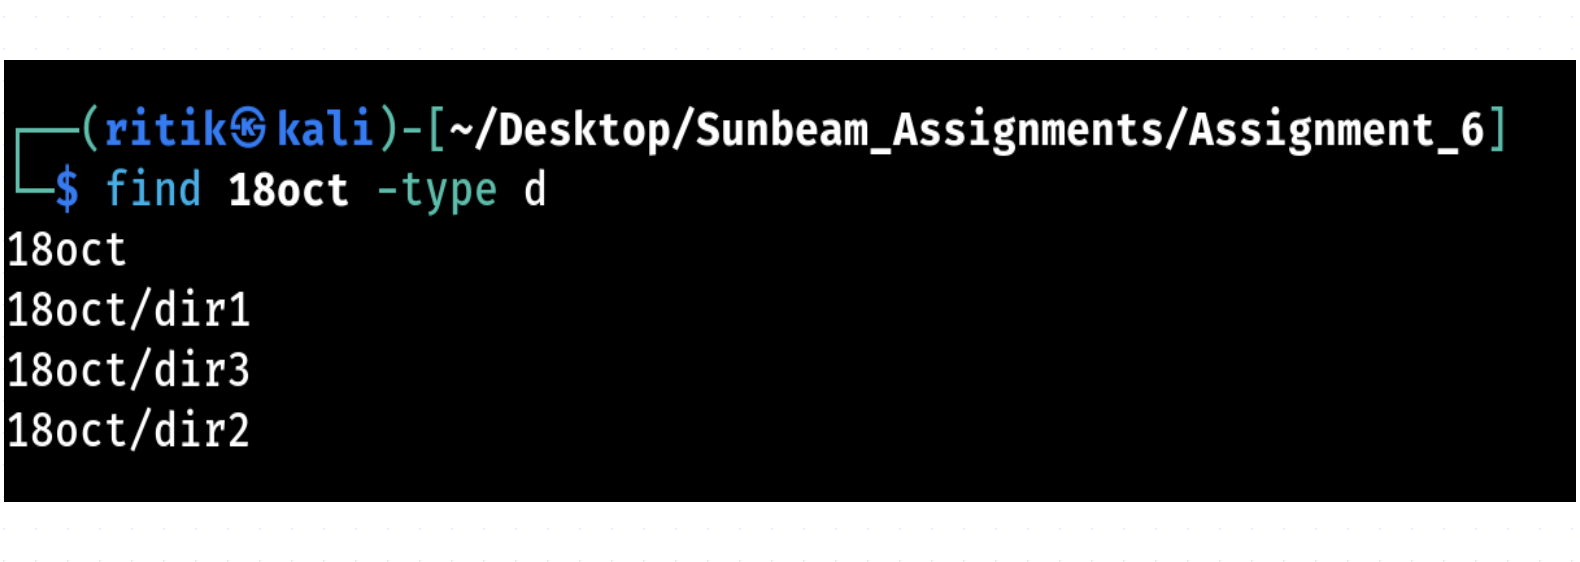

```
┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ find 18oct -type d
18oct
18oct/dir1
18oct/dir3
18oct/dir2
```

2. List only files.

find 18oct -type f

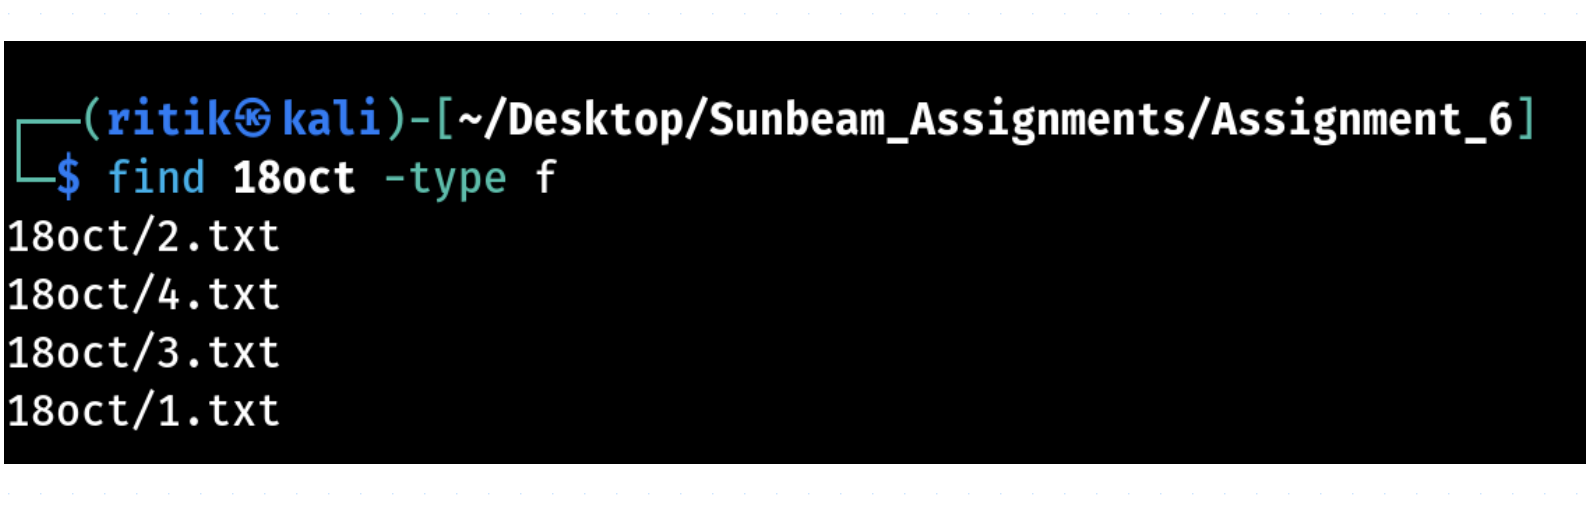

```
┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ find 18oct -type f
18oct/2.txt
18oct/4.txt
18oct/3.txt
18oct/1.txt
```

3. Make 2.txt executable, now search the files having permission as rwxr-xr-x (755) from 18oct.

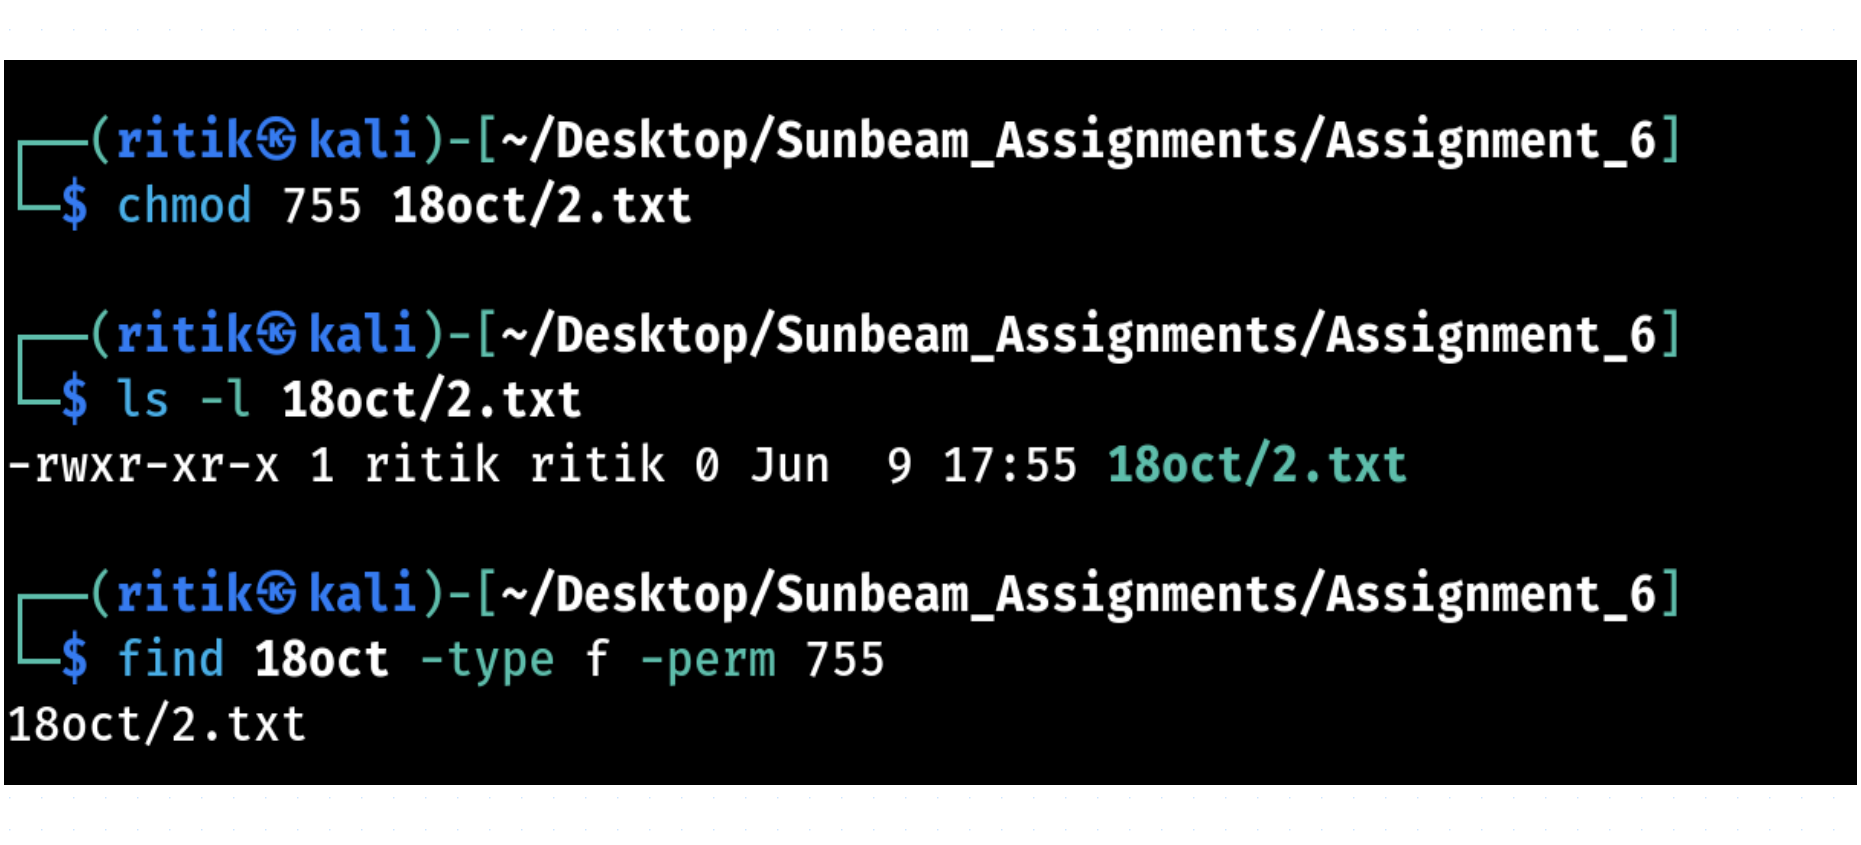

```
┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ chmod 755 18oct/2.txt

┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ ls -l 18oct/2.txt
-rwxr-xr-x 1 ritik ritik 0 Jun  9 17:55 18oct/2.txt

┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ find 18oct -type f -perm 755
18oct/2.txt
```

4. Search the file 4.txt.

find 18oct -type f -name "4.txt"

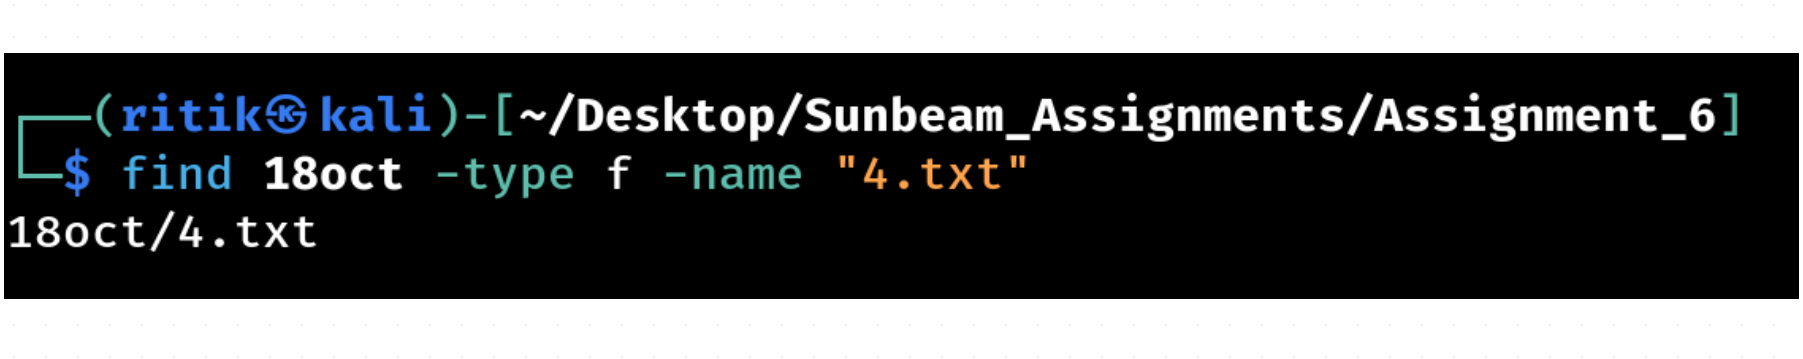

```
┌──(ritik㉿kali)-[~/Desktop/Sunbeam_Assignments/Assignment_6]
└─$ find 18oct -type f -name "4.txt"
18oct/4.txt
```