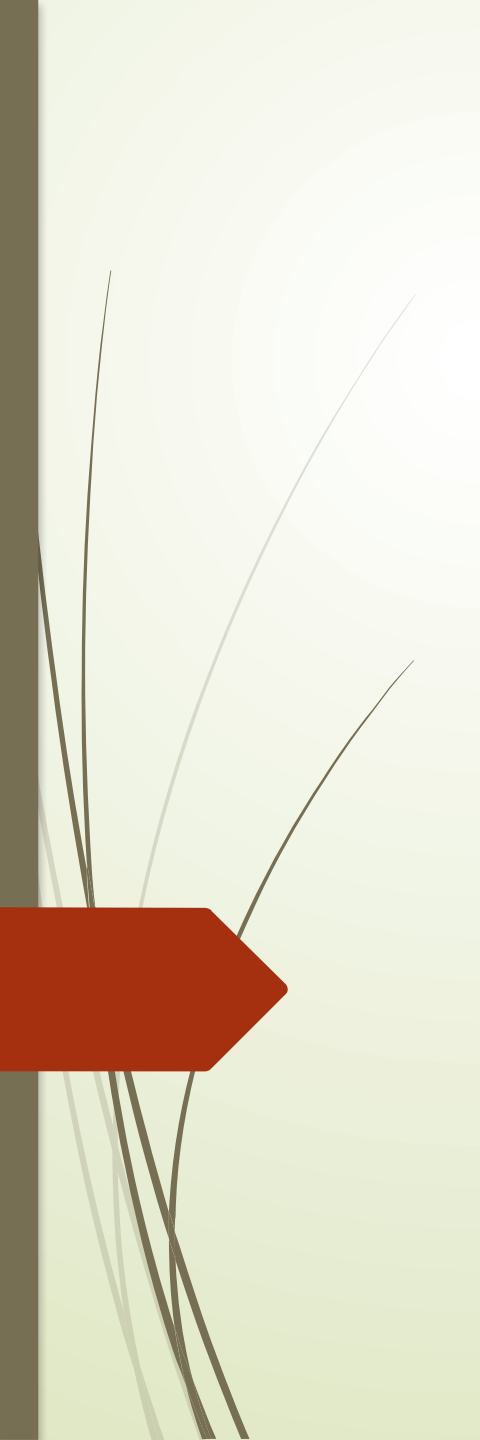




PHP Practicum

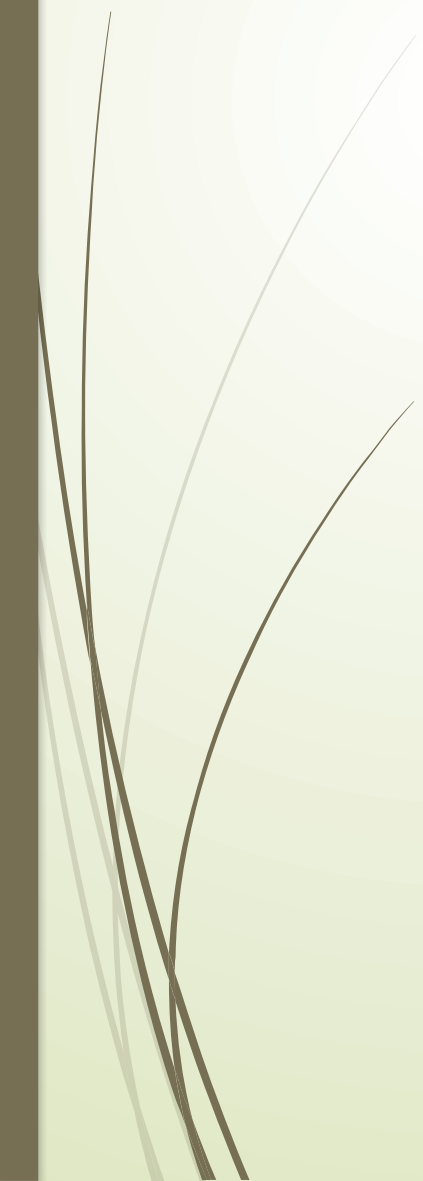
IS4102

Presentation 03

WGS Lakshitha
Instructor in Computer Technology
Faculty of Computing

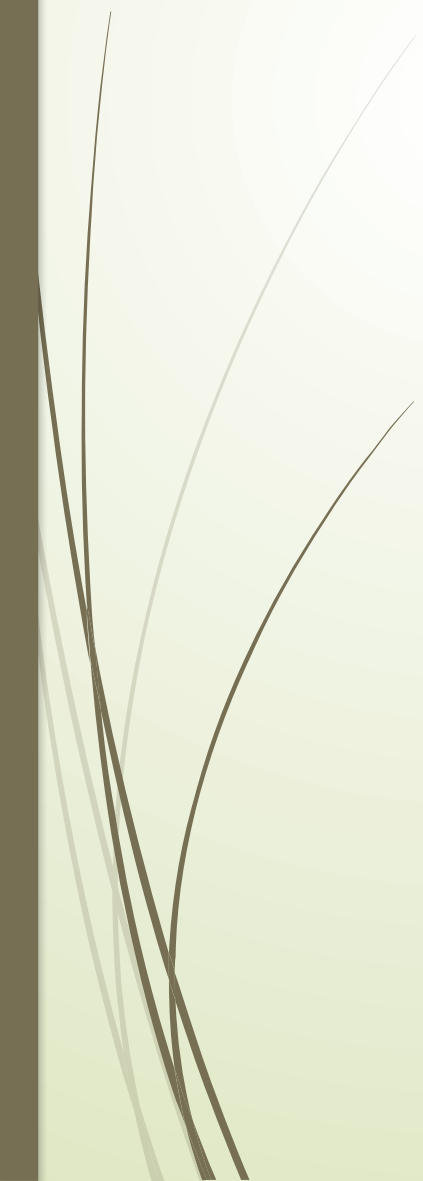


Content

- ▮ Assignment Operators
 - ▮ Conditional/Ternary Operators
- 



Assignment Operators

- ▮ Assignment operators are used to assign values to variables. The most common operator is =, but PHP also provides compound assignment operators for combined operations.
- 



Assignment Operators

Operator	Description	Example
=	Assign	\$x = \$y
+=	Add and assign	\$x += \$y
-=	Subtract and assign	\$x -= \$y
*=	Multiply and assign	\$x *= \$y
/=	Divide and assign	\$x /= \$y
%=	Modulus and assign	\$x %= \$y
**=	Exponent and assign	\$x **= \$y



Example 01: Simple Assignment

```
<?php  
$a = 10;  
$b = 20;  
$a = $b;  
echo "Value of a = $a";  
?>
```

Example 02: Compound Operators

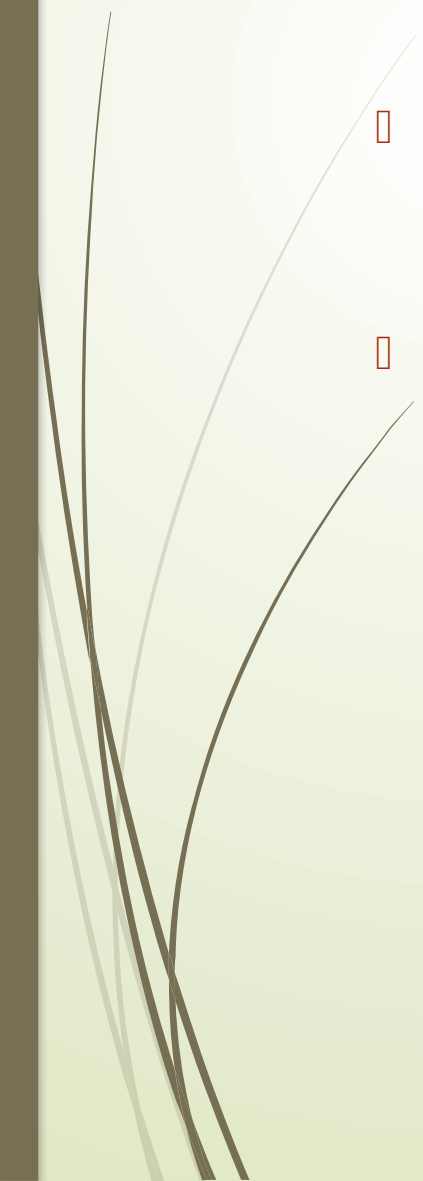
```
<?php
$x = 8;
$y = 2;

$x += $y; // ?
$x -= $y; // ?
$x *= $y; // ?
$x /= $y; // ?
$x %= $y; // ?

echo "x = $x";
?>
```



Conditional/Ternary Operators

- The ternary operator is a shorthand for if...else statements in PHP.
 - `(condition) ? (value if TRUE) : (value if FALSE);`
- 



Example 03

```
<?php
```

```
$age = 20;
```

```
$message = ($age >= 18) ? "You are an adult" : "You are a  
minor";
```

```
echo $message;
```

```
?>
```




Example 04

```
<?php

$num = 15;

$result = ($num % 2 == 0) ? "Even Number" : "Odd
Number";

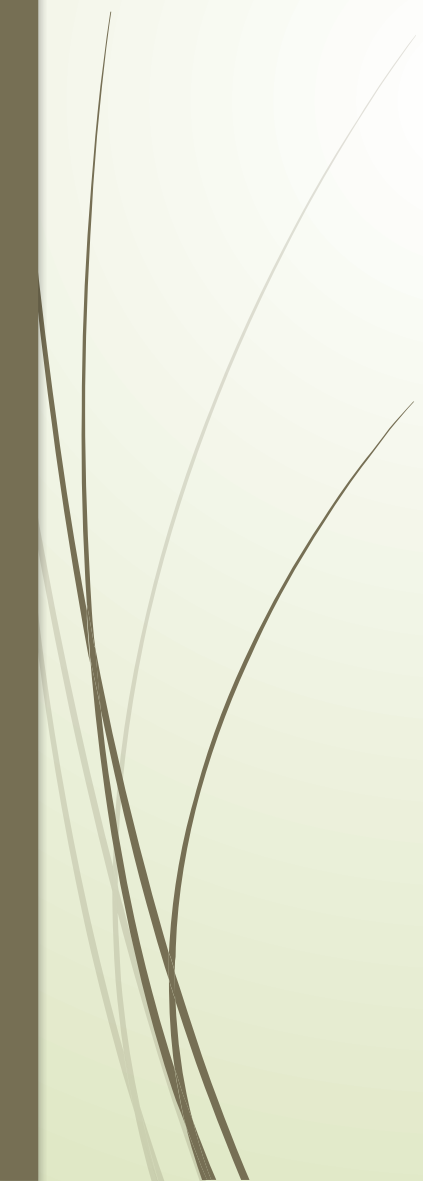
echo $result;

?>
```



Exercise 01

Write PHP program for check if a number is positive or negative using the ternary operator?





Answer

```
<?php

$num = -10; // you can change this number

$result = ($num >= 0) ? "Positive Number" : "Negative
Number";

echo $result;

?>
```



Exercise 02

Write PHP program for a login system using PHP ternary operator?

You want to set a variable **\$status** to the string "**Logged In**" if a boolean variable **\$isLoggedIn** is true, and "**Guest**" if it is false.



Answer

```
<?php

$isLoggedIn = true;

// Ternary operator: (condition) ? value_if_true :
value_if_false;

$status = $isLoggedIn ? "Logged In" : "Guest";

echo "User Status: " . $status;

?>
```



Exercise 03

Write PHP program for categorize a student's performance based on their **\$score**. using PHP ternary operator?

If the score is 80 or above, the result should be "Excellent".

If the score is between 50 and 79, the result should be "Pass".

If the score is below 50, the result should be "Failed".



Answer

```
<?php

$score = 65; // you can change student score

$result = ($score >= 80)
    ? "Excellent"
    : (($score >= 50) ? "Pass" : "Fail");

echo "Performance: " . $result;

?>
```



Thank you!