


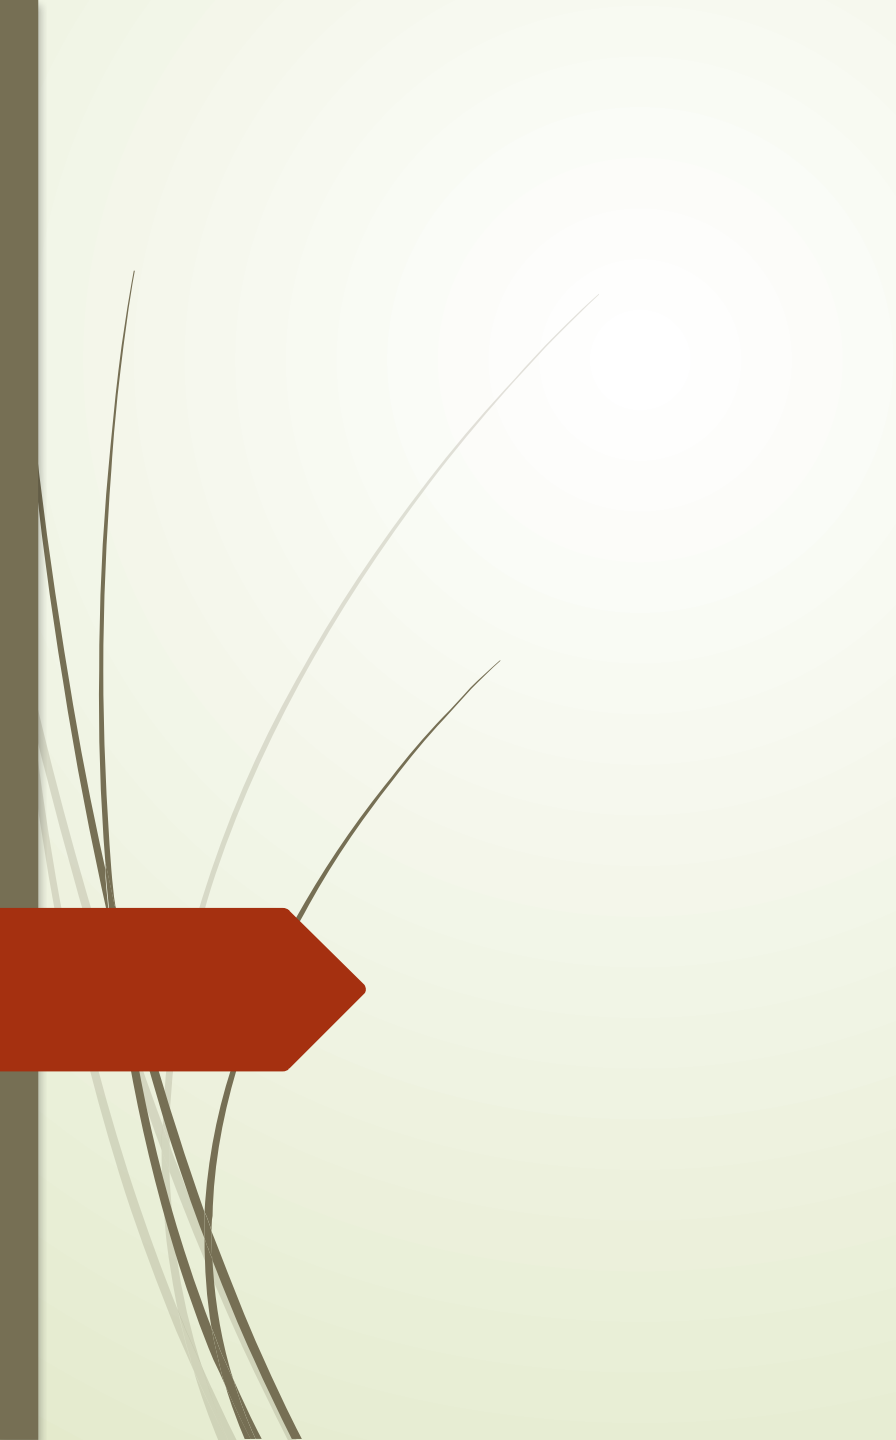

PHP Practicum


IS4102

Presentation 04

WGS Lakshitha
Instructor in Computer Technology
Faculty of Computing



Contents

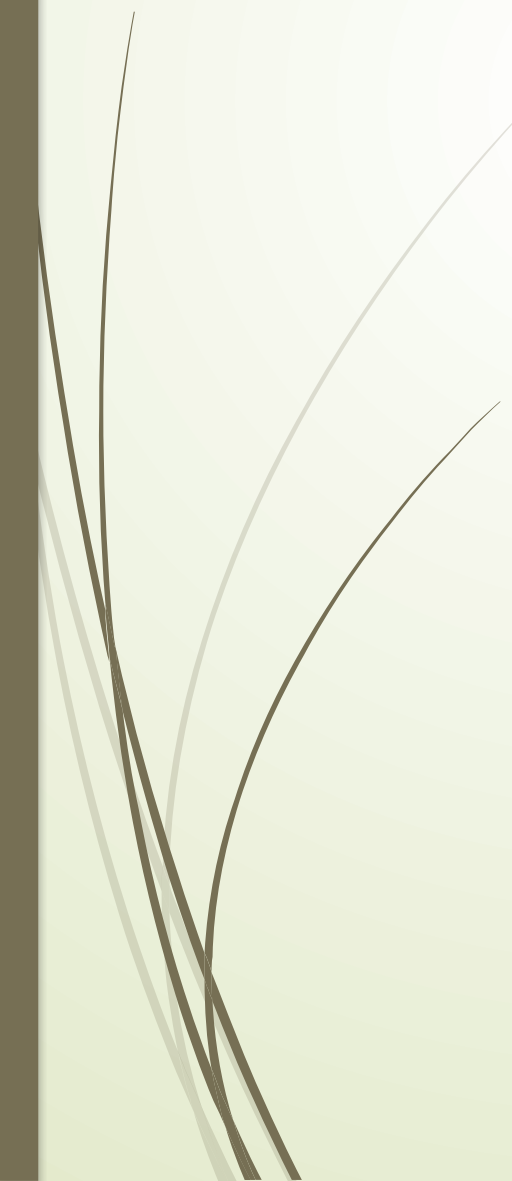- ▮ Identifying Browser & Platform
 - ▮ HTML Forms
 - ▮ Browser Redirection
 - ▮ GET Method
 - ▮ POST Method
 - ▮ \$_REQUEST
 - ▮ Common Input Elements
- 

Identifying Browser & Platform

There are lots of useful environment variables founded in PHP environment (phpinfo.php)

HTTP_USER_AGENT is one of environment variable which identifies the client's Browser & Platform.

```
<?php
```

```
$viewer = getenv("HTTP_USER_AGENT");
```

```
echo $viewer;
```

```
var_dump($viewer);
```

```
echo preg_match("/Mozilla/i",$viewer);
```

```
?>
```


use to access the value of any environment variable

use to ignore the class

use to check the existence of string patterns in a string



HTML Forms

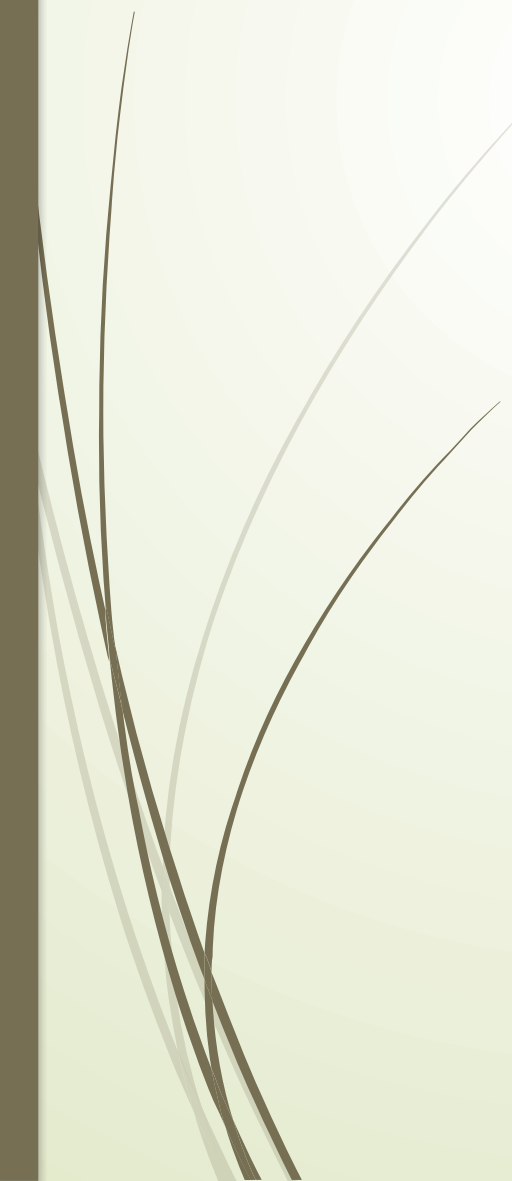- ❑ Used to collect user input
 - ❑ Essential for login, contact, search, etc.
 - ❑ Sends data to server
- 



Basic Form Syntax

```
<form action="submit.php" method="post">  
  <!-- form fields here -->  
</form>
```



Use of HTML Forms

- ▮ Any form element in an HTML page will automatically be available to PHP script.
- ▮ Usually, data in one page can send to another.
- ▮ The PHP superglobals `$_GET` and `$_POST` are used to collect form data.

Use of HTML Forms

```
<html>
<head></head>
<body>
  <form action="test.php" method="post">
    Name: <input type="text" name='name' />
    Age: <input type="text" name='age' />
    <input type="submit" />
  </form>
</body>
</html>
```

index1.php

these are superglobal variable


```
<?php
if (isset($_REQUEST['name']) && isset($_REQUEST['age'])) { if
( $_REQUEST['name'] || $_REQUEST['age'] ) {
    echo "Hi, " . $_REQUEST['name']. " ..!! <br />";
    echo $_REQUEST['age'];
    exit();
}
}
?>
```

Test.php



Use of HTML Forms

- ▮ `$_PHP_SELF` returns the name and path of the current file.
- ▮ This can be used to send data of the form to itself.

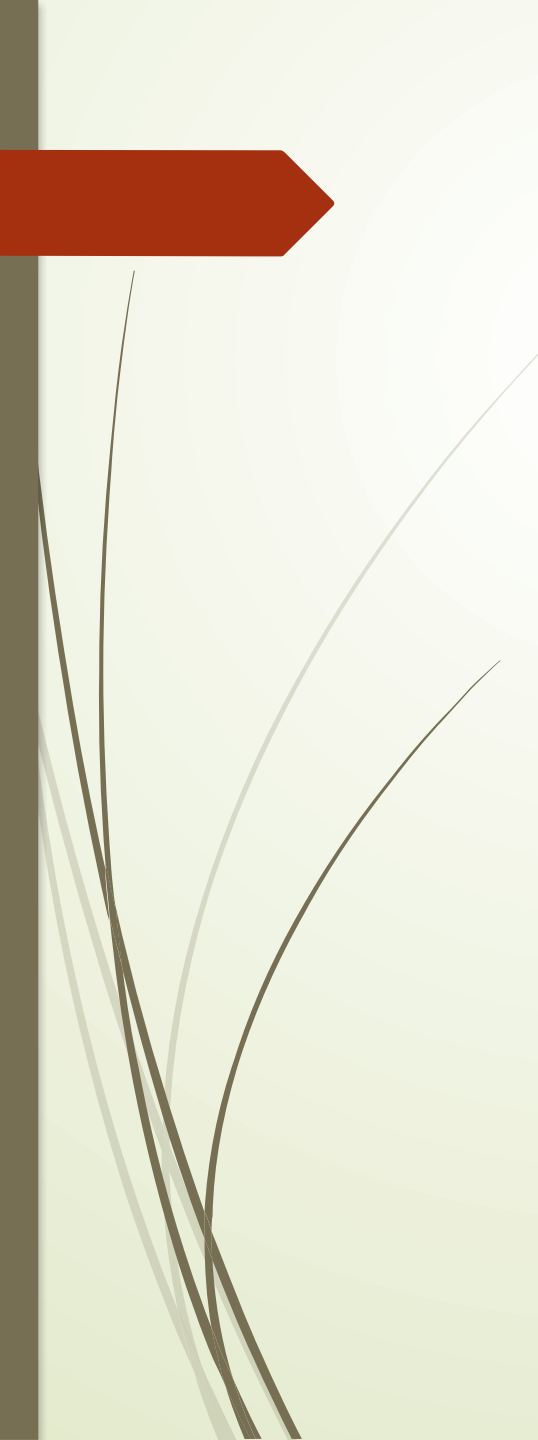

```
<?php
```

```
    if (isset($_REQUEST['name']) && isset($_REQUEST['age'])) { if ( $_REQUEST['name'] ||  
    $_REQUEST['age'] ) {
```

```
        echo $_REQUEST['name']. "<br />";
```

```
        echo $_REQUEST['age']; exit();
```

```
    }
```

```
}
```

```
?>
```

```
<html>
```

```
    <head></head>
```

```
    <body>
```

```
        <form action="<?php $_PHP_SELF ?>" method="POST">
```

```
            Name: <input type="text" name='name' /> Age: <input type="text" name='age' />
```

```
            <input type="submit" />
```

```
        </form>
```

```
    </body>
```

```
</html>
```



Browser Redirection

- ❑ The header() function sends a raw HTTP header to a client
- ❑ Location : value in string parameter of header().
- ❑ This is used to specify the target

```
<html>
  <body>
    <p>Choose a site to visit :</p>
    <form action="<?php $_PHP_SELF ?>"
    method="POST">
      <select name="location">.
        <option value="http://www.yahoo.com">
          Yahoo Search Page
        </option>
        <option value="http://www.google.lk">
          Google Search Page
        </option>
      </select>
      <input type="submit" />
    </form>
  </body>
</html>
```

```
<?php
  if(isset($_POST['location']))
  { if( $_POST["location"] ){
    $location =
    $_POST["location"];
    header( "Location:
    $location" );
    exit();
  }
}
```



Exercise 01

- ❑ Create a search bar which uses Google search engine to search something?
- ❑ Hint: Google search page is redirected to result page while it sends the information of searched topic through URL in following manner.
- ❑ <https://www.google.com/#q=Searched item>

Answer

```
<?php
    if (isset($_REQUEST['topic'])) {
        $location = "https://www.google.com/#q=" . \$\_REQUEST\['topic'\];
        header("Location:$location");
        exit();
    }
?>
<html>
    <head></head>
    <body>
        <form action="<?php $_PHP_SELF ?>" method="POST">
            Enter Something to Search : <input type="text" name='topic' />
            <input type="submit" value="Search" />
        </form>
    </body>
</html>
```

GET and POST Methods

- ❑ Used to send information to the web server by the client.
- ❑ URL Encoding Scheme is used to encode the information.
- ❑ Name/Value pairs are joined with Equal sign
- ❑ Different pairs are separated by the ampersand(&)
- ❑ **Name1=value1&name2=value2&name3=value3**
- ❑ Spaces are replaced with the + character
- ❑ Any other non-alphanumeric characters are converted into hexadecimal

Values

<https://www.facebook.com/photo.php?fbid=800348543424499&set=a.542923089167047.1073741845.100003480832816&type=3&theater>



GET Method

- ❑ The GET method produces a long string that appears in your server logs, in the browser's Location: box.
- ❑ The GET method is restricted to send up to 1024 characters only.
- ❑ Never use GET method if you have password or other sensitive information to be sent to the server.
- ❑ GET can't be used to send binary data, like images or word documents, to the server.
- ❑ The data sent by GET method can be accessed using QUERY_STRING environment variable.
- ❑ The PHP provides \$_GET associative array to access all the sent information using GET method.

GET Method

- ▮ Encoded user information appended to the page request.
- ▮ Page and Information are separated by the ? Character.

<http://www.something.com/index.php?name1=value1&name2=value2>

<https://www.facebook.com/photo.php?fbid=800348543424499&set=a.542923089167047.1073741845.100003480832816&type=3&theater>



Exercise 02

- Rearrange the searching page code with GET method and see what happens in the URL Bar?

Answer

```
<?php
if (isset($_GET['topic'])) {
    $location = "https://www.google.com/search?q=" . urlencode($_GET['topic']);
    header("Location: $location");
    exit();
}
?>
<!DOCTYPE html>
<html>
<head>
    <title>Search Redirect</title>
</head>
<body>
    <h2>Search on Google</h2>
    <form method="get" action="<?php $_PHP_SELF ?>">
        <label>Enter topic:</label>
        <input type="text" name="topic" required />
        <input type="submit" value="Search" />
    </form>
</body>
</html>
```




POST Method

- ❑ Encoded user information transferred through HTTP Header
- ❑ So that the security depends on countermeasures of HTTP
- ❑ No restriction on data size
- ❑ Information can be ASCII values or Binary data
- ❑ The PHP provides \$_POST associative array to access all the sent information using POST method
- ❑ Use POST method to sent password or other sensitive information to the server



Exercise 03

Rearrange the searching page code with POST method and see what happens in the URL Bar?

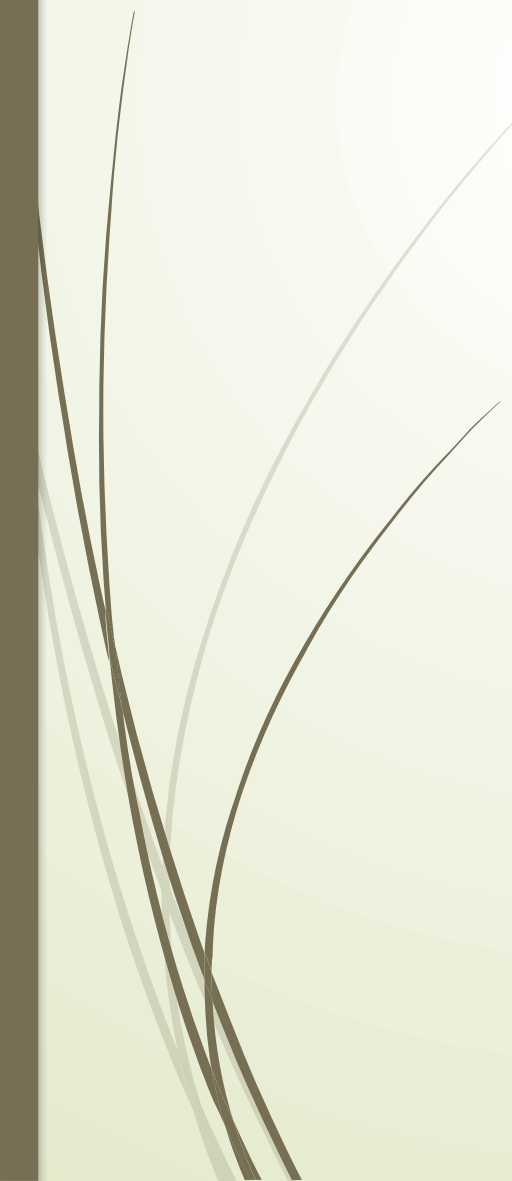

Answer

```
<?php
if (isset($_POST['topic'])) {
    $location = "https://www.google.com/#q=" . urlencode($_POST['topic']);
    header("Location: $location");
    exit();
}
?>
<!DOCTYPE html>
<html>
<body>
    <form action="<?php echo $_SERVER['PHP_SELF']; ?>" method="POST">
        <label>Enter Something to Search:</label>
        <input type="text" name="topic" required />
        <input type="submit" value="Search" />
    </form>
</body>
</html>
```



\$_REQUEST

- ❑ A PHP Superglobal variable that used to collect data after submitting HTML forms.
- ❑ Useful to read the data from the submitted HTML open form
- ❑ Used to get information sent using both the GET and POST Method.
- ❑ It is an associative array that by default contains contents of an \$_GET, \$_POST and \$_COOKIE.



Exercise 04

- Create a Registration page to display entered details
 - Name
 - Age
 - Password



Answer

```
<html>
<head></head>
<body>
  <form action="<?php $_PHP_SELF ?>" method="get">
    Name: <input type="text" name='name' />
    Age: <input type="text" name='age' />
    Password: <input type="Password" name='pwd' />
    <input type="submit" />
  </form>
</body>
</html>
```




Answer(Con...)

```
<?php
if (isset($_POST['name']) && isset($_POST['age']) && isset($_POST['pwd'])) { if ( $_POST['name'] ||
$_POST['age'] || $_POST['pwd'] ){
    echo "Hi, " . $_POST['name'] . " ...!! <br />";
    echo $_POST['age'] . "<br>"; exit();
}
}
?>
```



Exercise 05

- ❑ Write a PHP script that creates multiplication table using for loops?
- ❑ Add cellpadding="3px" and cellspacing="0px" to the table tag.
- ❑ The number of rows (upto which integer) should be requested from user.



Answer

```
<html>

<body>

<form action="<?php $_PHP_SELF ?>" method="POST"> Number of Rows: <input type="number"
name="nr" />

<input type="submit" />


</form>
```

Answer(Con...)

```
<table align="left" border="1" cellpadding="3" cellspacing="0">
<?php
if(isset($_POST['nr'])) {
    $x = $_POST['nr']; for($i=1;$i<=$x;$i++){
    echo "<tr>";
    for ($j=1;$j<=5;$j++){
        echo "<td>$i * $j = ".$i*$j."</td>";
    }
    echo "</tr>";
    }
}
?>
</table>
</body>
</html>
```



Common Input Elements

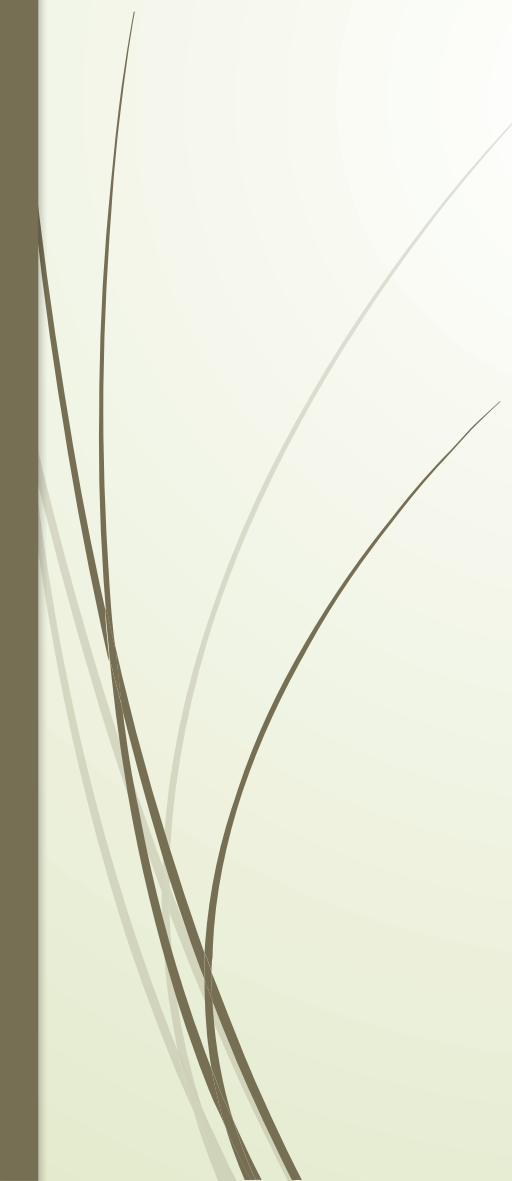- `<input>`
 - `<textarea>`
 - `<select>`
 - `<button>`
- 



Common Input Elements: <input>

HTML Form

```
<form method="post" action="">  
  Name: <input type="text" name="username" required>  
  <input type="submit" value="Submit">  
</form>
```

PHP

```
<?php  
if ($_SERVER["REQUEST_METHOD"] == "POST") {  
    $name = $_POST['username'];  
    echo "Hello, " . htmlspecialchars($name);  
}  
?>
```



Common Input Elements: <textarea>

HTML Form

```
<form method="post" action="">
  Message:<br>
  <textarea name="message" rows="4" cols="50"></textarea><br>
  <input type="submit" value="Send">
</form>
```

PHP

```
<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $msg = $_POST['message'];
    echo "Your message: " . nl2br(htmlspecialchars($msg));
}
?>
```



Common Input Elements: <select>

HTML Form

```
<form method="post" action="">
```

Choose a department:

```
<select name="department">
```

```
  <option value="SE">SE</option>
```

```
  <option value="DS">DS</option>
```

```
  <option value="CIS">CIS</option>
```

```
</select>
```

```
<input type="submit" value="Submit">
```

```
</form>
```


Common Input Elements: <select>

PHP

```
<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $dep = $_POST['department'];
    echo "You selected: " . htmlspecialchars($dep);
}
?>
```

Common Input Elements: <button>

HTML Form

```
<form method="post" action="">
  <button type="submit" name="submitBtn" value="clicked">Click Me</button>
</form>
```

PHP

```
<?php
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    if (isset($_POST['submitBtn'])) {
        echo "Button was clicked!";
    }
}
?>
```



Thank you!