


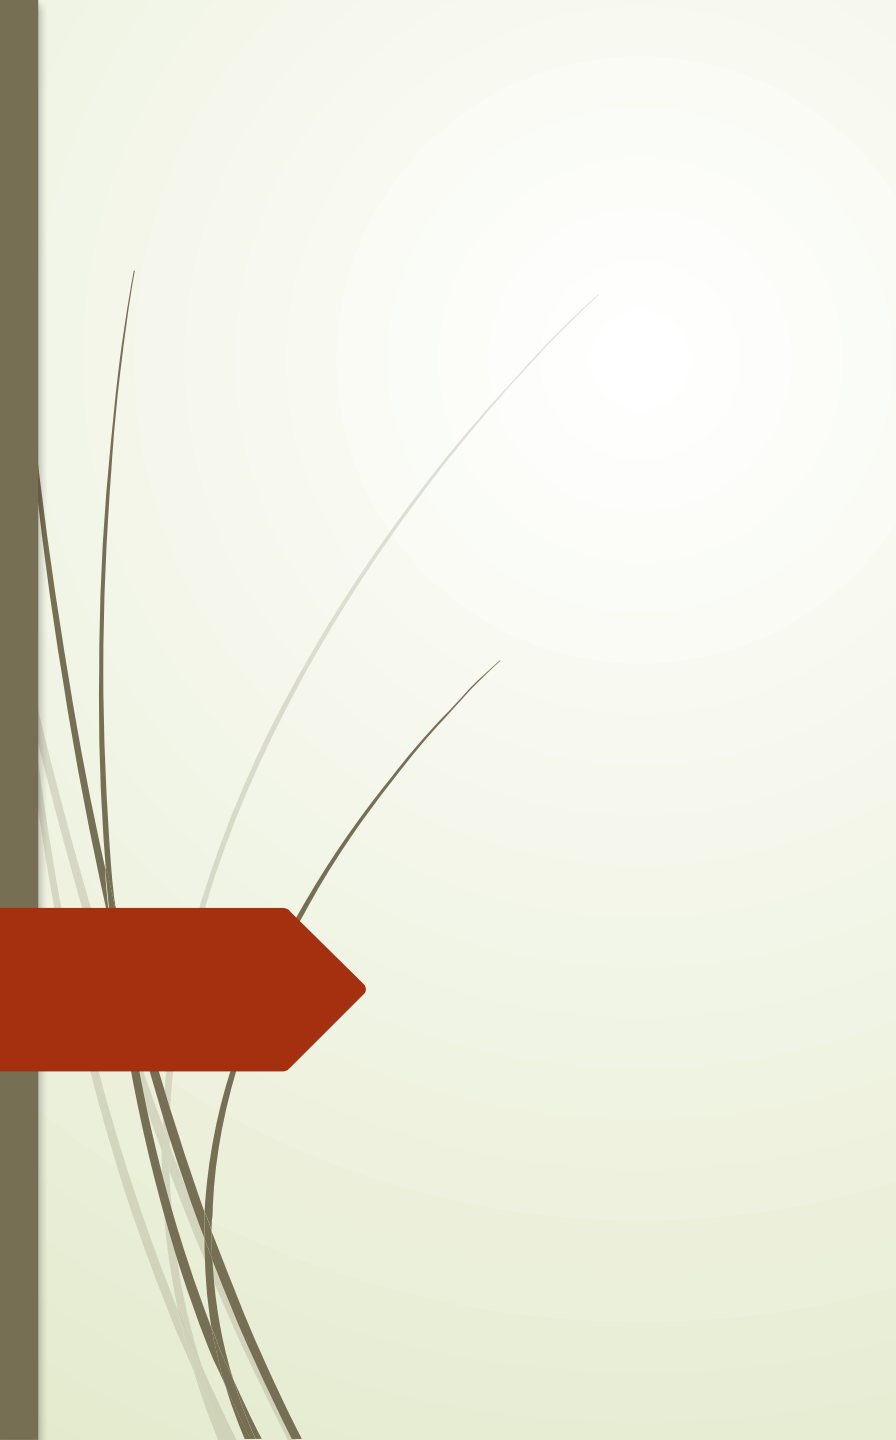

PHP Practicum


IS4102

Presentation 05

WGS Lakshitha
Instructor in Computer Technology
Faculty of Computing




Contents

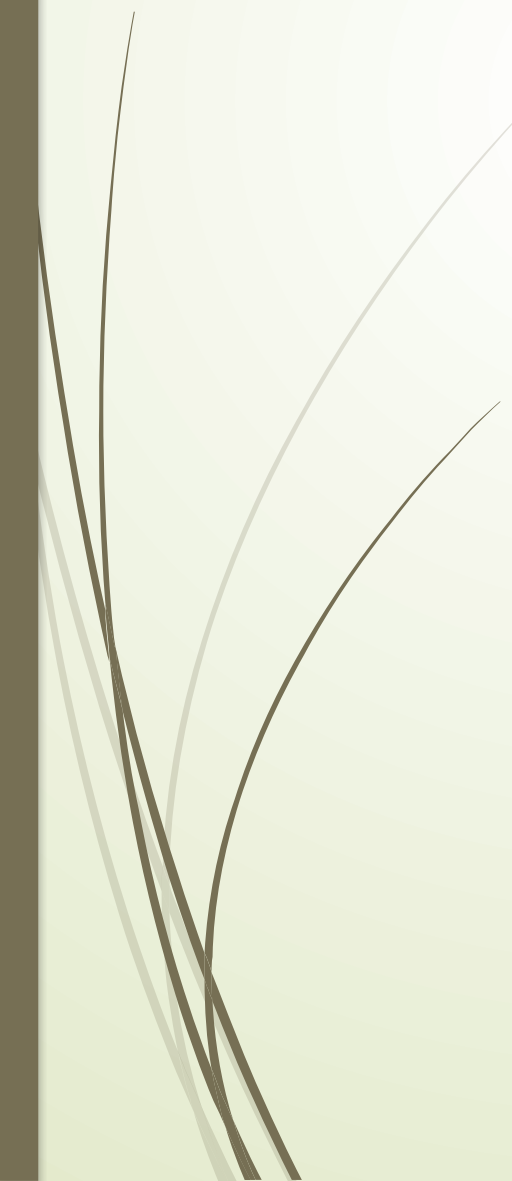- ▢ Creating a Database
 - ▢ Creating a Table
 - ▢ Create Database Connection
 - ▢ Testing a Database Connection
- 

Creating a Database

- ❑ The first step is creating the database and table for store data.
- ❑ We can use MySQL to create a database.
- ❑ Start the XAMP server in your machine.
- ❑ Then run the Mysql and Apace server.

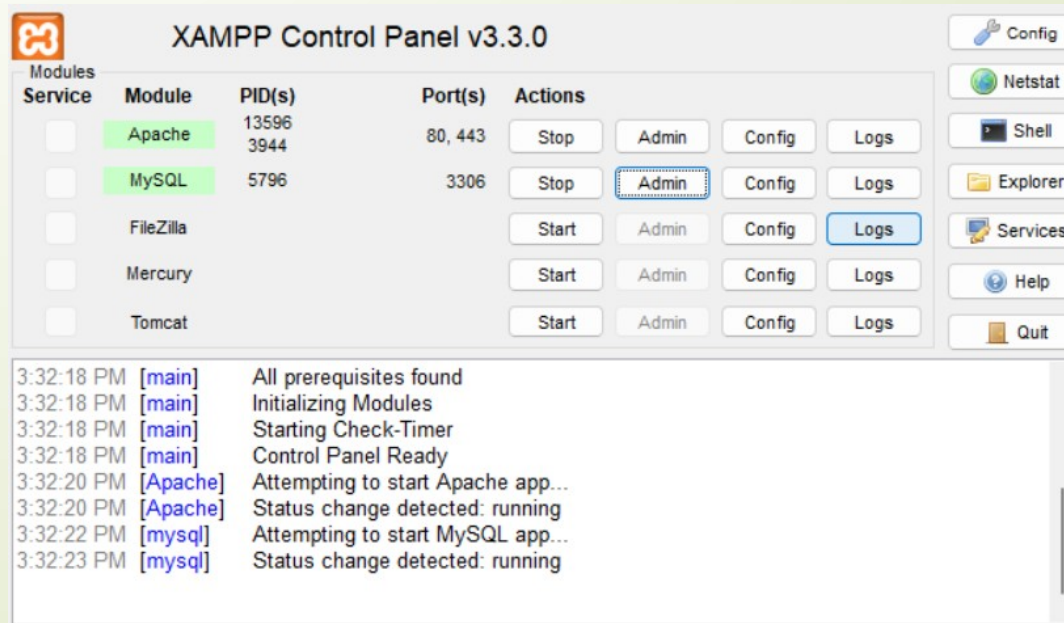


XAMPP Control Panel v3.3.0

Service	Module	PID(s)	Port(s)	Actions
☐	Apache	13596 3944	80, 443	Stop Admin Config Logs
☐	MySQL	5796	3306	Stop Admin Config Logs
☐	FileZilla			Start Admin Config Logs
☐	Mercury			Start Admin Config Logs
☐	Tomcat			Start Admin Config Logs

3:32:18 PM [main] All prerequisites found
3:32:18 PM [main] Initializing Modules
3:32:18 PM [main] Starting Check-Timer
3:32:18 PM [main] Control Panel Ready
3:32:20 PM [Apache] Attempting to start Apache app...
3:32:20 PM [Apache] Status change detected: running
3:32:22 PM [mysql] Attempting to start MySQL app...
3:32:23 PM [mysql] Status change detected: running

Creating a Database


- Click the new on the left side menu.
- Then enter the database name as **MyDB** and click the create button.

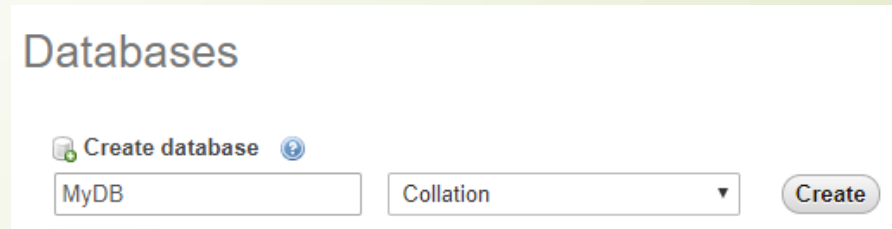

The screenshot shows a web interface titled "Databases". Below the title, there is a link "Create database" with a question mark icon. Underneath, there is a text input field containing "MyDB", a dropdown menu labeled "Collation", and a "Create" button.

Creating a Table

- ❑ Create an item table.
- ❑ Firstly, enter the table name as item, and the number of columns is four after selecting the Go button can be seen below the window.

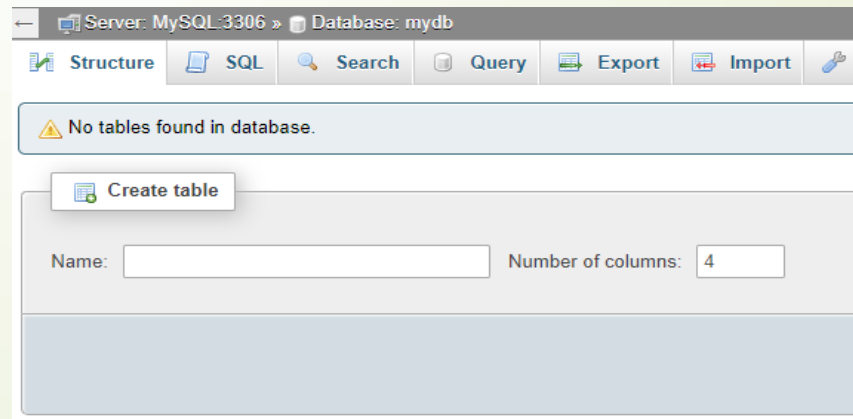


Server: MySQL-3306 » Database: mydb

Structure SQL Search Query Export Import

No tables found in database.

Create table

Name: Number of columns: 4

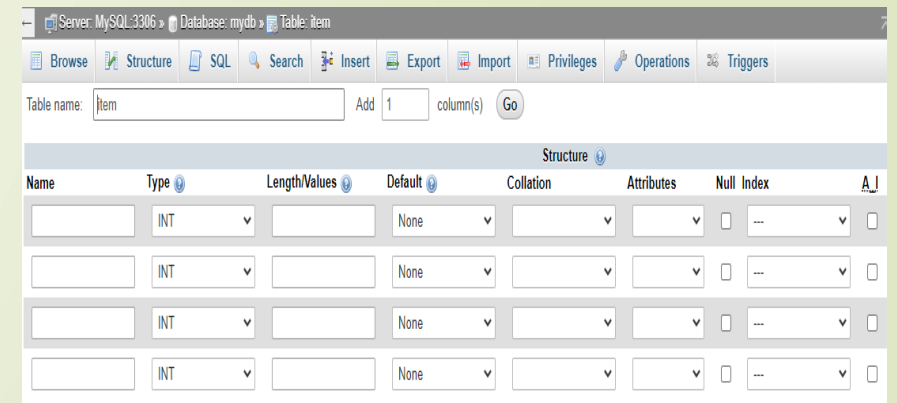

Server: MySQL-3306 » Database: mydb » Table: item


Browse Structure SQL Search Insert Export Import Privileges Operations Triggers

Table name: item Add 1 column(s) Go

Name	Type	Length/Values	Default	Collation	Attributes	Null	Index	A.I
	INT		None			☐	---	☐
	INT		None			☐	---	☐
	INT		None			☐	---	☐
	INT		None			☐	---	☐

Creating a Table

Fill the table column names with length/values and select the types.

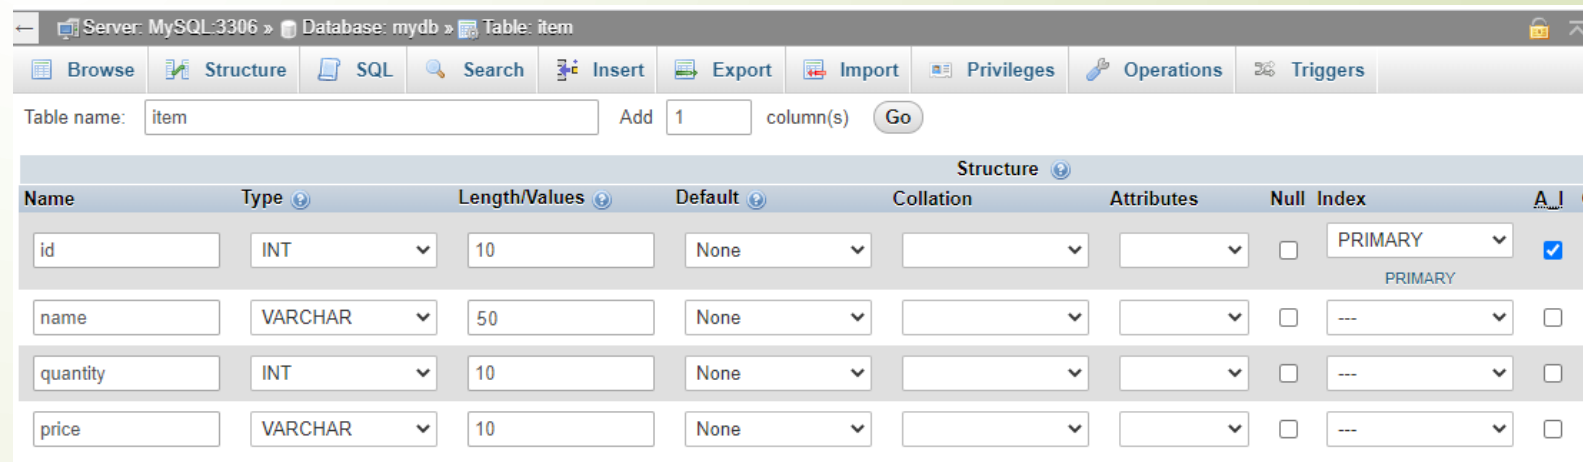

The screenshot shows the MySQL Table Structure dialog box for a table named 'item' in the 'mydb' database. The 'Structure' tab is active, displaying a table with four columns: 'id', 'name', 'quantity', and 'price'. The 'id' column is set as the primary key. The 'name' column is of type VARCHAR with a length of 50. The 'quantity' column is of type INT with a length of 10. The 'price' column is of type VARCHAR with a length of 10. All columns have a default value of 'None' and are nullable. The 'id' column has an index of 'PRIMARY' and is checked for 'A.I.' (Auto-Increment).


Server: MySQL:3306 » Database: mydb » Table: item

Table name: Add column(s)

Name	Type	Length/Values	Default	Collation	Attributes	Null	Index	A.I.
id	INT	10	None			☐	PRIMARY	☒
name	VARCHAR	50	None			☐	---	☐
quantity	INT	10	None			☐	---	☐
price	VARCHAR	10	None			☐	---	☐

Creating a Table

Structure of Item table.

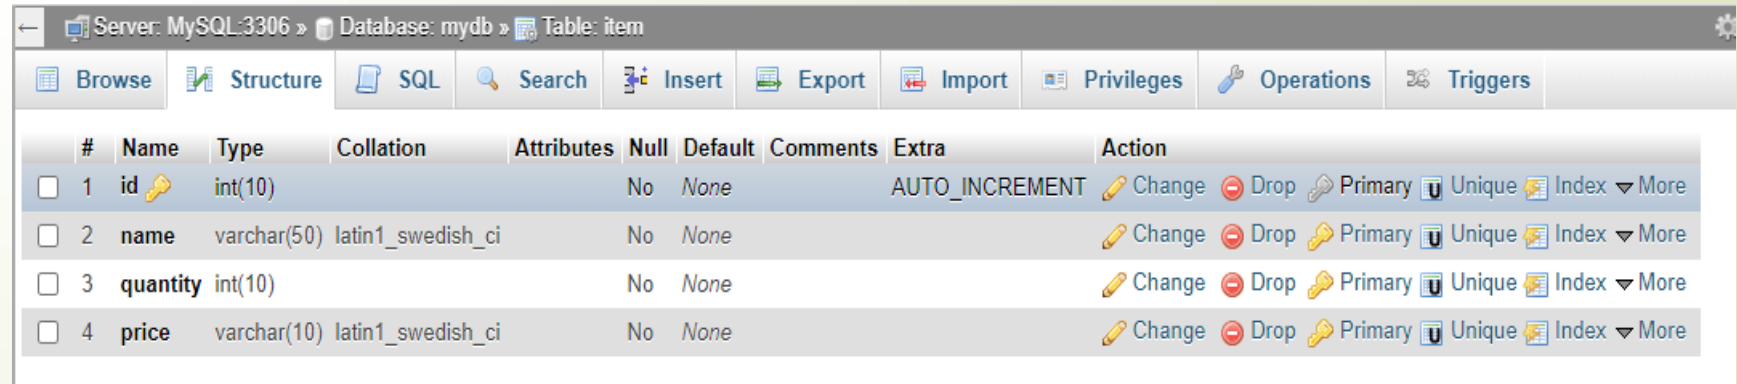

The screenshot shows the MySQL Table Structure window for the 'item' table in the 'mydb' database. The table has four columns: 'id' (int(10), primary key, auto-increment), 'name' (varchar(50), latin1_swedish_ci), 'quantity' (int(10)), and 'price' (varchar(10), latin1_swedish_ci). The 'id' column is the primary key. The 'name' and 'price' columns are also marked as primary in the interface, which is likely a UI artifact as they cannot be primary keys in the same table.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐ 1	id	int(10)			No	None		AUTO_INCREMENT	Change Drop Primary Unique Index More
☐ 2	name	varchar(50)	latin1_swedish_ci		No	None			Change Drop Primary Unique Index More
☐ 3	quantity	int(10)			No	None			Change Drop Primary Unique Index More
☐ 4	price	varchar(10)	latin1_swedish_ci		No	None			Change Drop Primary Unique Index More

Create a PHP/MySQL Database Connection

- Firstly, you need to use the host server IP for \$localhost. When we run PHP in our machine, we can use 127.0.0.1 or localhost.

```
$localhost = "127.0.0.1"; //or localhost
```

- Then use database username for the \$username variable.

```
$username = "root";
```

- Next, use database password for \$password variable. (default password is empty)

```
$password = "";
```

- Then use the database name for the need to connect.

```
$dbname= "mydb";
```


Create a PHP/MySQL Database Connection

```
<?php
$localhost = "127.0.0.1"; //use this Ip address or 'localhost'
$username = "root"; //database user name, default username is root
$password = ""; //if you use database password, enter password here.
$dbname = "mydb"; //your database name

$connect = new mysqli($localhost, $username, $password, $dbname);


if ($connect->connect_error) {
    die("Connection Failed : " . $connect->connect_error);
}

else {
    echo "Successfully Connected";
}
?>
```

- ❑ Save this file under the **htdocs** folder (**C/xampp/htdocs**) name should be **dbconnection.php**

Test the database connection

- ❑ Run the XAMP server.
- ❑ Open the web browser.
- ❑ Type **localhost/dbconnection.php** and press the Enter key.

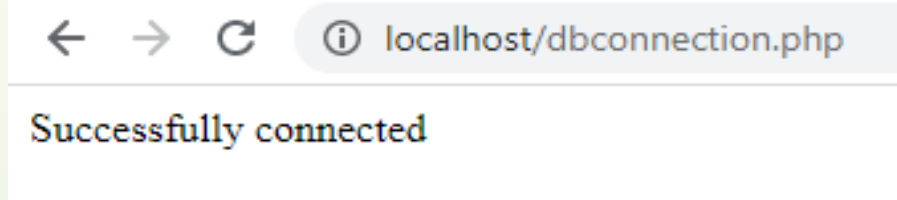



Thank you!