





PHP Practicum

IS4102

Presentation 07

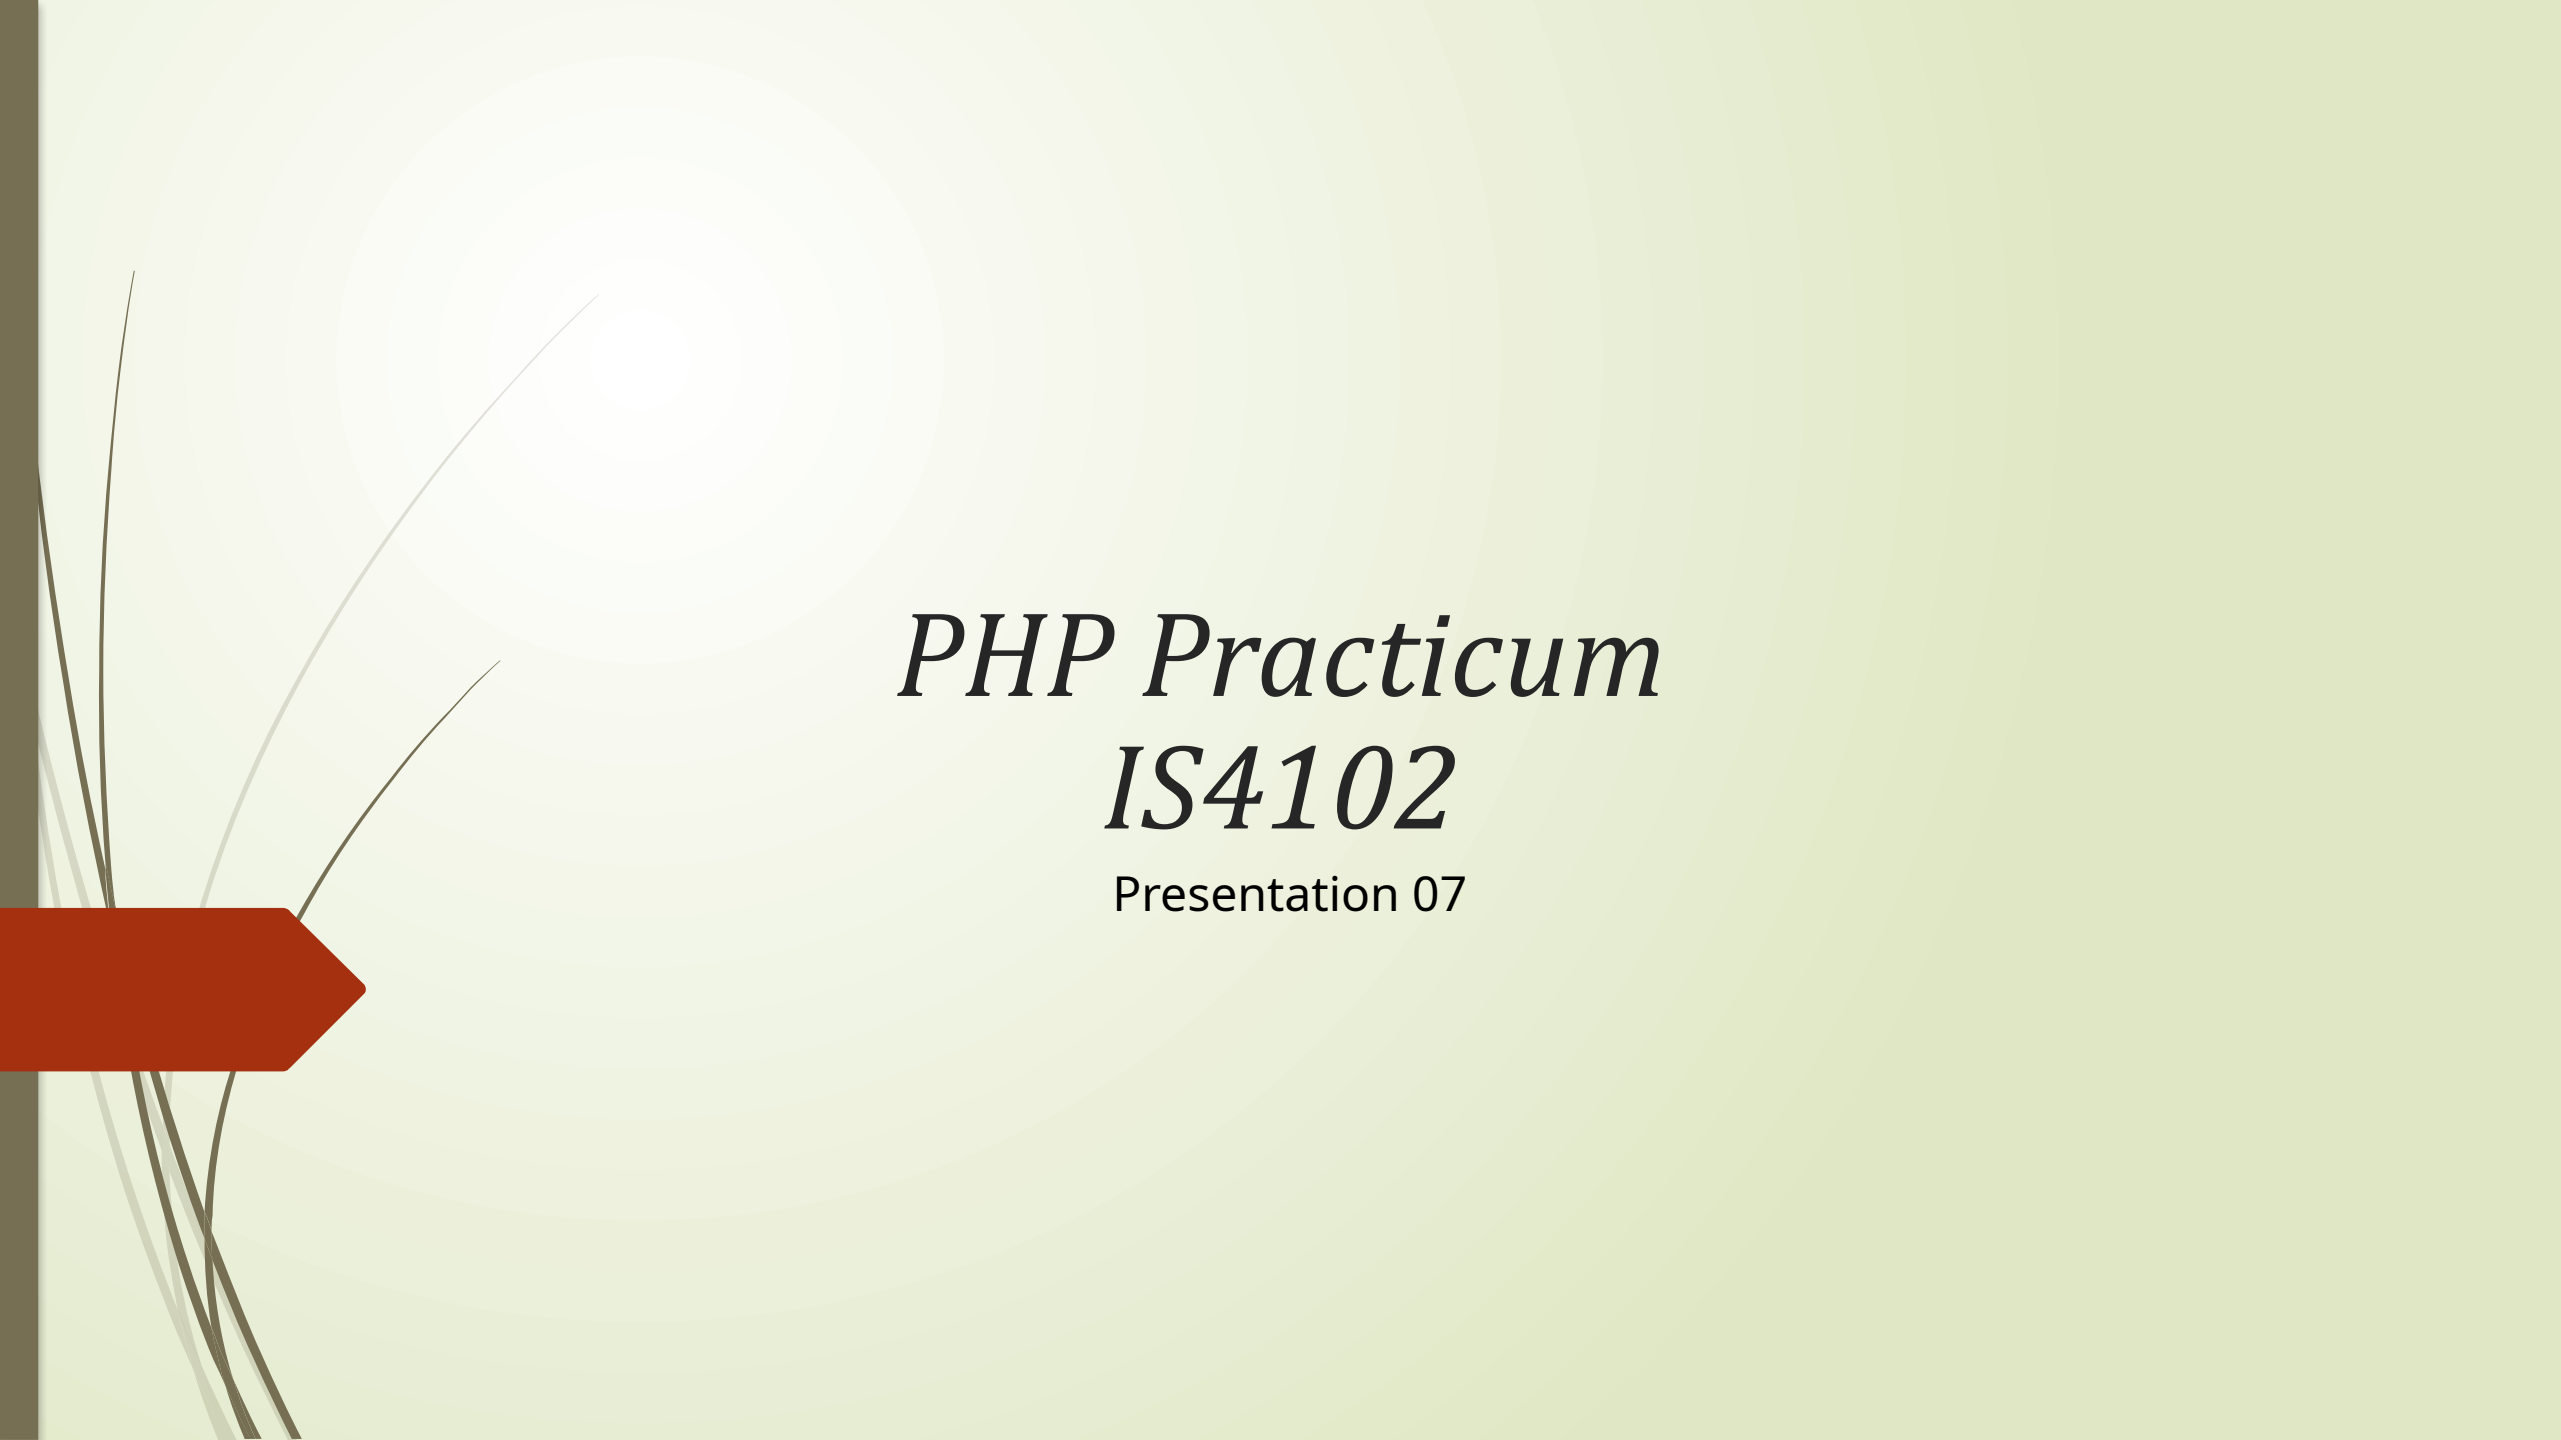

Contents

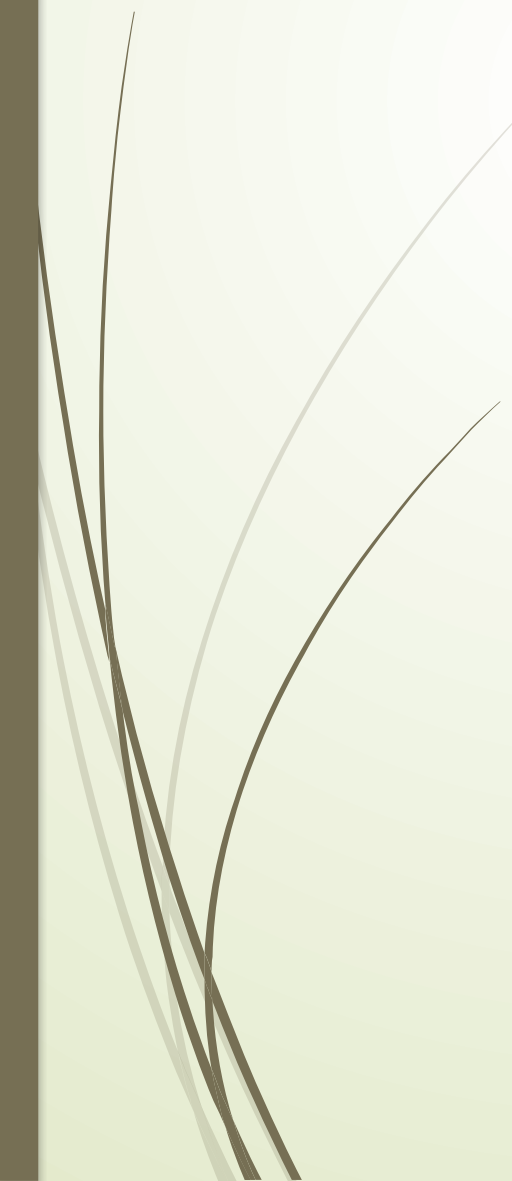- ▮ Session
 - ▮ Cookies
- 



Session

- ▮ An alternative way to make data accessible through a website.
- ▮ It creates a file in a temporary directory on the server.
- ▮ That file includes registered session variables and their values.
- ▮ Each particular session has a unique identifier of random string of 32 hexadecimal number.
- ▮ A cookie called PHPSESSID is automatically sent to the user's computer to store unique session identification string.
- ▮ A file is automatically created on the server in the designated temporary directory and bears the name of the unique identifier.
- ▮ To start a session : **session_start();**
- ▮ Session variables are stored in associative array called **\$_SESSION[]**



Session(cont.)

- ▮ **Session ID:** Each user is assigned a unique session ID, which is stored in a cookie or passed via URL.
- ▮ **Starting a Session:** A session is started with `session_start()`.
- ▮ **Storing Session Variables:** Use the `$_SESSION` super global array.
- ▮ **Destroying a Session:** Use `session_destroy()` to end a session and clear all session variables.



Example 01

```
<?php
session_start();

if( isset( $_SESSION['count'] ) ){
    $_SESSION['count'] += 1;
}
else{
    $_SESSION['count'] = 1;
}

$msg = "You have visited this page ". $_SESSION['count'] ." times in this
session.";

?>
```



Example 01 (cont.)

```
<html>
<head>
<title>Setting up a PHP session</title>
</head>
<body>
<?php echo ( $msg ); ?>
</body>
</html>
```



Example 02: start_session.php

```
<?php
    // Start the session
    session_start();

    // Set session variables
    $_SESSION["username"] = "admin";
    $_SESSION["email"] = "admin@example.com";
    $_SESSION["loggedin"] = true;

    echo "Session variables are set.";
?>
```



Example 03: access_session.php

```
<?php
    // Start the session
    session_start();

    // Access session variables
    if (isset($_SESSION["loggedin"]) && $_SESSION["loggedin"] === true) {
        echo "Welcome " . $_SESSION["username"] . "!\n";
        echo "Your email address is " . $_SESSION["email"] . ".";
    } else {
        echo "Please log in first.";
    }
?>
```





Example 04: destroy_session.php

```
<?php
    // Start the session
    session_start();

    // Unset all session variables
    $_SESSION = array();

    // Destroy the session
    session_destroy();

    echo "Session destroyed.";
?>
```

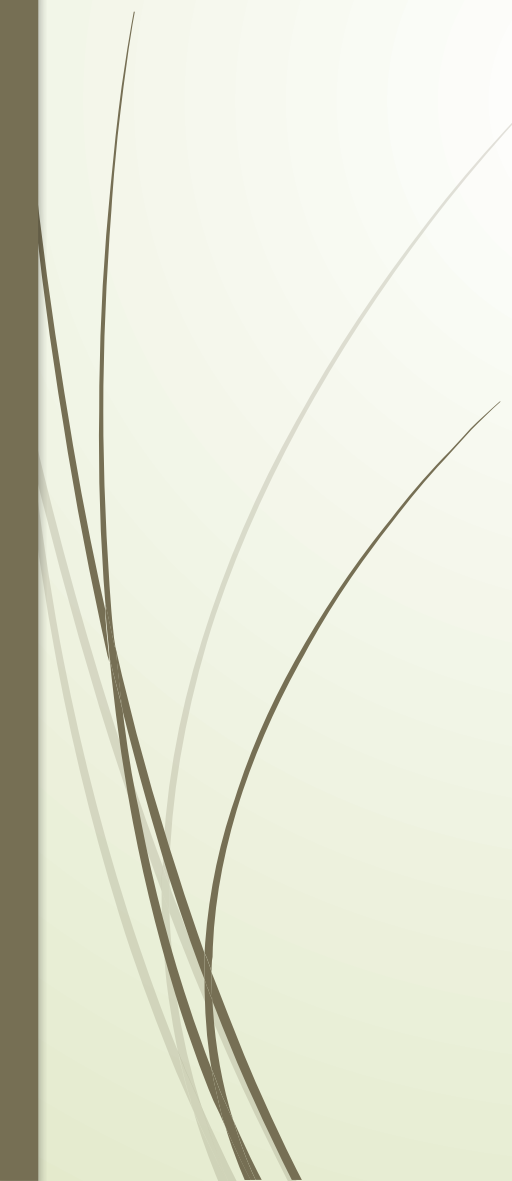



Exercise 01

- Try to recreate the code that resetting the visited count to zero when visiting count reach 5.
- Can use `session_destroy()`



Answer

```
<?php
session_start();
if( isset( $_SESSION['count'] ) ){
    $_SESSION['count'] += 1;
}
else{
    $_SESSION['count'] = 1;
}
$msg = "You have visited this page ". $_SESSION['count'] ." times in this session.";
if ($_SESSION['count']>5){
    echo "you have visited ".$_SESSION['count']." times, ";
    echo "So that this session variable will be setted to zero <br/>";
    unset($_SESSION['count']);
    echo "now this session will be destroyed <br/>";
session_destroy();
}
?>
```




Answer(cont.)

```
<html> <head>
<title>Setting up a PHP session</title>
</head>
<body>
<?php echo ( $msg ); ?>
</body>
</html>
```



Cookies

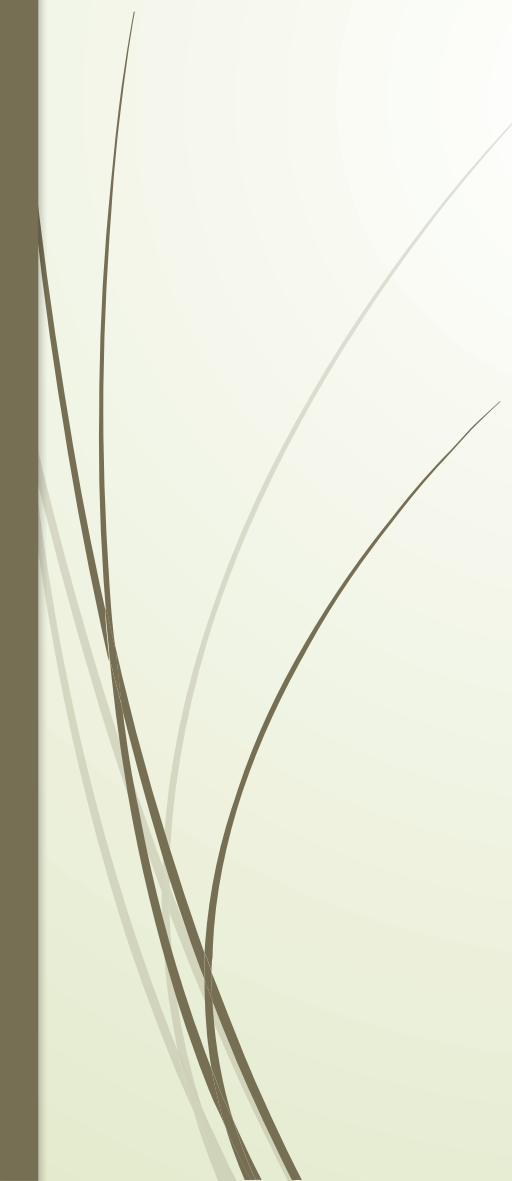- ❑ Cookies are small pieces of data stored on the client's browser.
 - ❑ They are used to store user preferences, session data, and other information that needs to persist between page loads or visits.
- 



Example 05: set_cookie.php

```
<?php
// Set a cookie named "user" with the value "John"
setcookie("user", "John", time() + (86400 * 30), "/"); // 86400 = 1 day

// Set a cookie named "email" with the value "john@example.com"
setcookie("email", "john@example.com", time() + (86400 * 30), "/");

echo "Cookies are set.";
?>
```



Example 06: get_cookie.php

```
<?php
// Check if the cookie is set
if(isset($_COOKIE["user"])) {
    echo "User is " . $_COOKIE["user"] . "<br>";
} else {
    echo "User cookie is not set.<br>";
}

if(isset($_COOKIE["email"])) {
    echo "Email is " . $_COOKIE["email"] . "<br>";
} else {
    echo "Email cookie is not set.";
}
?>
```



Example 07: delete_cookie.php

```
<?php
// Delete the "user" cookie by setting its expiration date to one hour ago
setcookie("user", "", time() - 3600, "/");

// Delete the "email" cookie by setting its expiration date to one hour ago
setcookie("email", "", time() - 3600, "/");

echo "Cookies are deleted.";
?>
```




Thank you!