


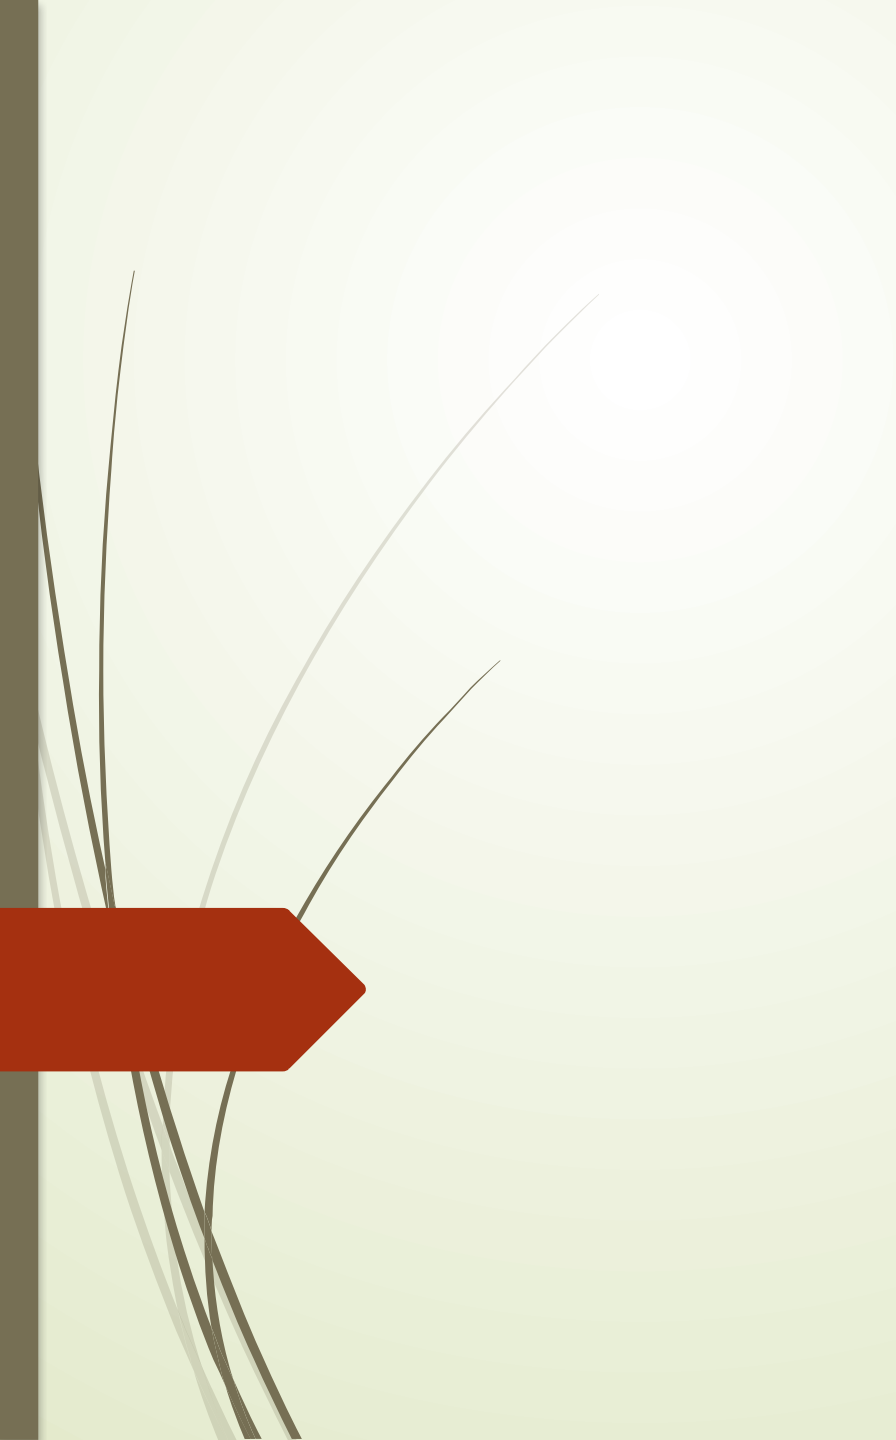

PHP Practicum


IS4102

Presentation 09

WGS Lakshitha
Instructor in Computer Technology
Faculty of Computing




Contents

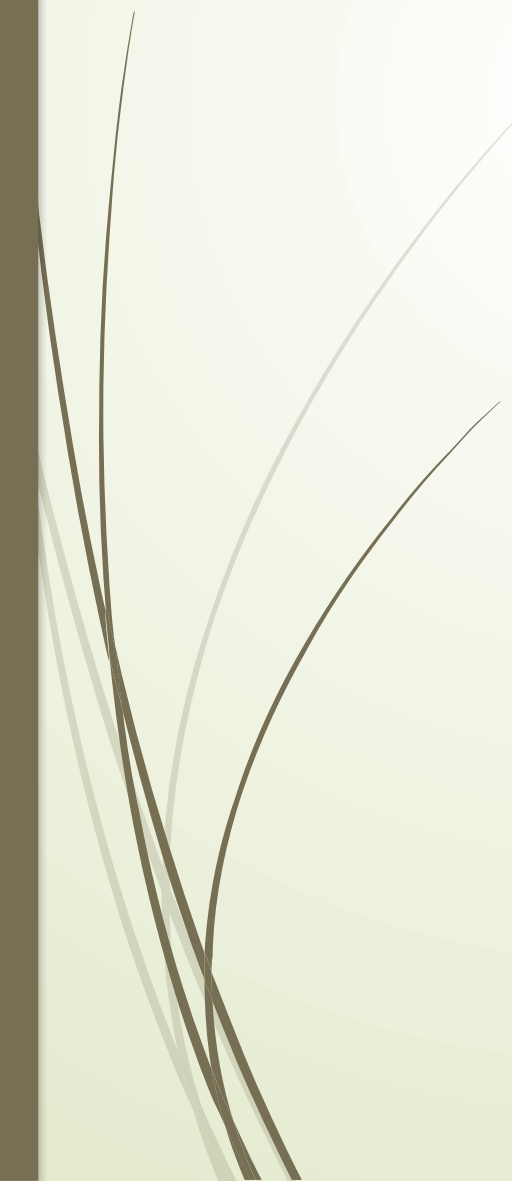- ❑ Create database and table using MySQL
 - ❑ Create database connection
 - ❑ Create item view page to identify delete items
 - ❑ Create delete function
 - ❑ Test the delete function
- 


Step 01: Create database and table using MySQL

- ❑ The first step is creating the database and table for store data.
- ❑ We can use MySQL to create a database.
- ❑ Start the XAMP server in your machine.
- ❑ Then run the MySQL and Apache server.

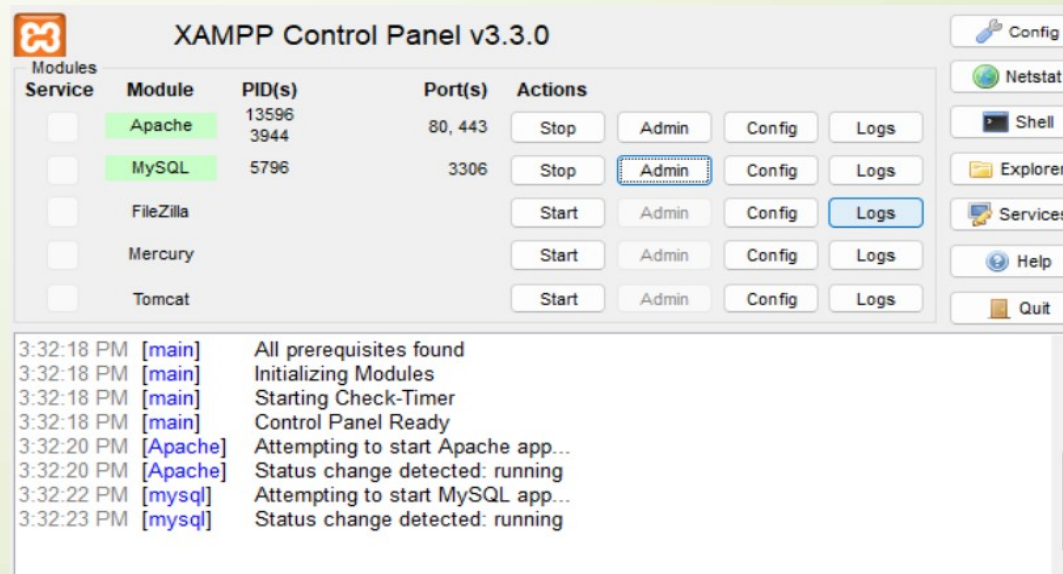

Creating a Database

- Click the new on the left side menu.
- Then enter the database name as **MyDB** and click the create button.

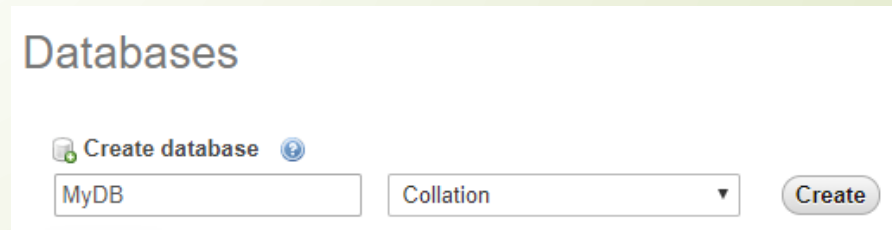

The screenshot shows the 'Databases' section of a MySQL management tool. It features a 'Create database' link with a question mark icon. Below this, there is a text input field containing 'MyDB', a dropdown menu labeled 'Collation', and a 'Create' button.


Databases

Create database ?

MyDB Collation Create

Creating a Table

- ❑ Create an item table.
- ❑ Firstly, enter the table name as item, and the number of columns is four after selecting the Go button can be seen below the window.

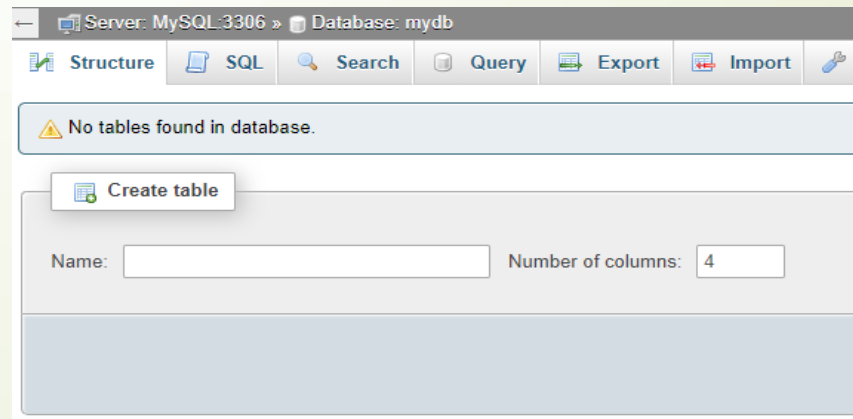


Server: MySQL-3306 » Database: mydb

Structure SQL Search Query Export Import

⚠ No tables found in database.

Create table

Name: Number of columns:

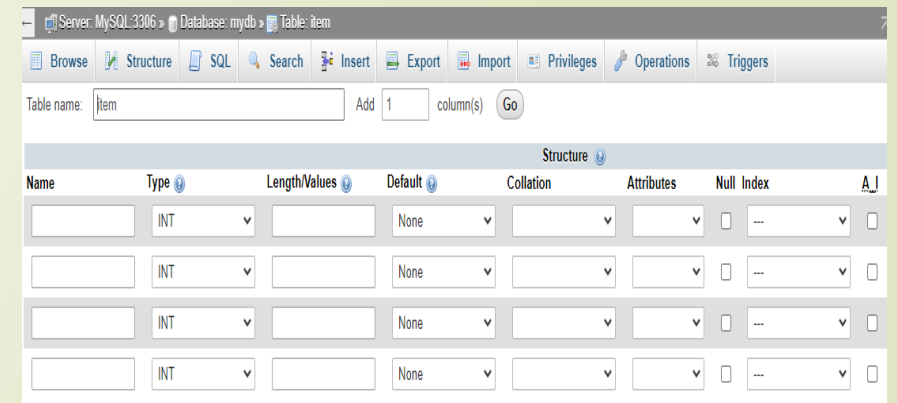

Server: MySQL-3306 » Database: mydb » Table: item

Browse Structure SQL Search Insert Export Import Privileges Operations Triggers

Table name: Add 1 column(s) Go

Name	Type	Length/Values	Default	Collation	Attributes	Null	Index	A.I
	INT		None			☐	--	☐
	INT		None			☐	--	☐
	INT		None			☐	--	☐
	INT		None			☐	--	☐

Creating a Table(Cont.)

Fill the table column names with length/values and select the types.

Server: MySQL:3306 » Database: mydb » Table: item


Browse Structure SQL Search Insert Export Import Privileges Operations Triggers

Table name: item Add 1 column(s) Go

Structure								
Name	Type	Length/Values	Default	Collation	Attributes	Null	Index	
id	INT	10	None			☐	PRIMARY	☒
								PRIMARY
name	VARCHAR	50	None			☐	---	☐
quantity	INT	10	None			☐	---	☐
price	VARCHAR	10	None			☐	---	☐

Creating a Table(cont.)

Structure of Item table.

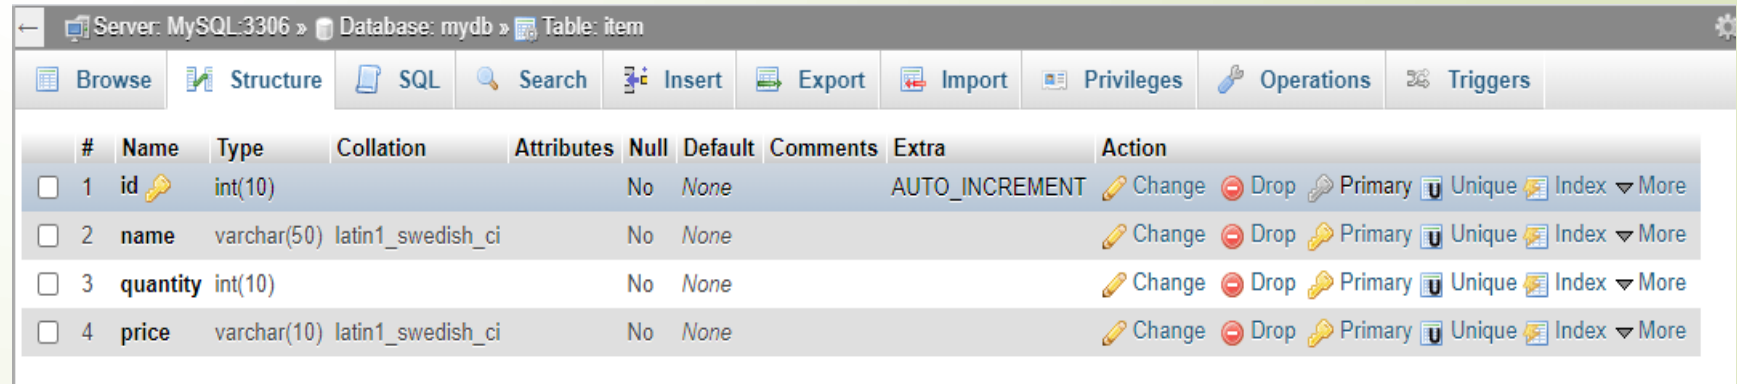

The screenshot shows the MySQL Table Structure window for the 'item' table in the 'mydb' database. The table has four columns: 'id' (int(10), primary key, auto-increment), 'name' (varchar(50), latin1_swedish_ci), 'quantity' (int(10)), and 'price' (varchar(10), latin1_swedish_ci). Each column has a set of actions: Change, Drop, Primary, Unique, Index, and More.

#	Name	Type	Collation	Attributes	Null	Default	Comments	Extra	Action
☐ 1	id	int(10)			No	None		AUTO_INCREMENT	Change Drop Primary Unique Index More
☐ 2	name	varchar(50)	latin1_swedish_ci		No	None			Change Drop Primary Unique Index More
☐ 3	quantity	int(10)			No	None			Change Drop Primary Unique Index More
☐ 4	price	varchar(10)	latin1_swedish_ci		No	None			Change Drop Primary Unique Index More

Step 02: Create a PHP/MySQL Database Connection

```
<?php
$localhost = "127.0.0.1"; //use this Ip address or 'localhost'
$username = "root"; //database user name, default username is root
$password = ""; //if you use database password, enter password here.
$dbname = "mydb"; //your database name

$connect = new mysqli($localhost, $username, $password, $dbname);

if ($connect->connect_error) {
    die("Connection Failed : " . $connect->connect_error);
}


else {
    echo "Successfully Connected";
}
?>
```

- ❑ Save this file under the **htdocs** folder (**C/xampp/htdocs**) name should be **dbconnection.php**

Step 03: delete_form.php

- ❑ Save this file under the **htdocs** folder (**C/xampp/htdocs**) name should be **delete_form.php**

```
<!DOCTYPE html>
<html>
<head>
<title>Delete Item</title>
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.css">
<style type="text/css">
.wrapper{
    width: 500px;
    margin: 0 auto;
}
</style>
</head>
<?php
    require_once "dbconnection.php";
?>
```

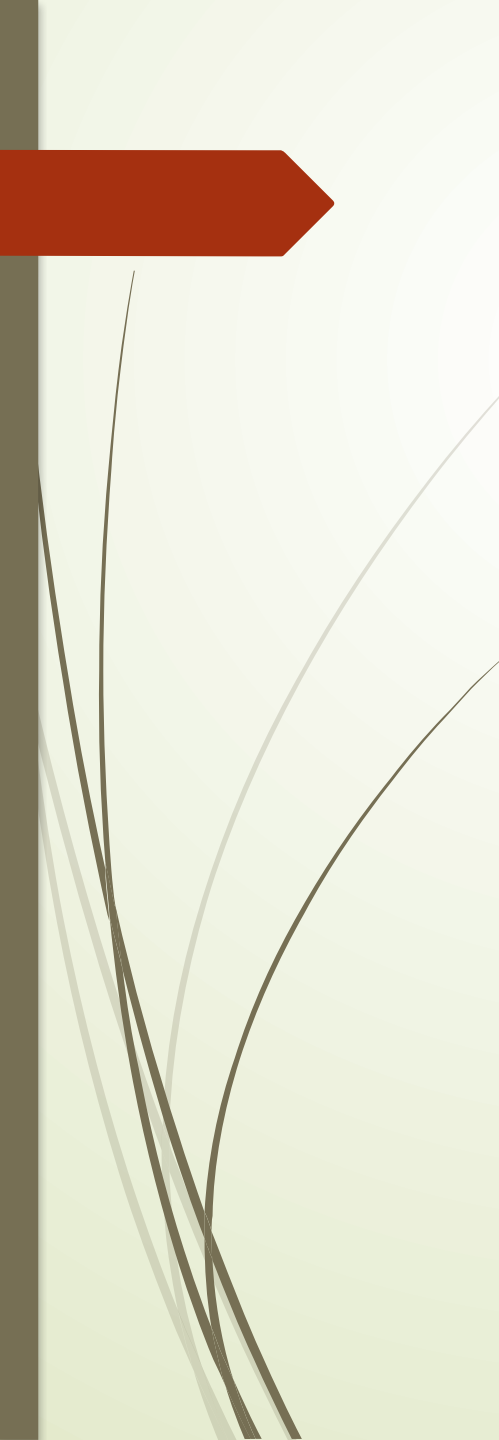

```
<body>
<div class="wrapper">
    <div class="container-fluid">
<div class="row">
<div class="col-md-12">
<div class="page-header">
<h2>PHP/MySQL Delete function</h2>
</div>
<?php
    $sql = "SELECT * FROM item";
    $result = $connect->query($sql);

    if ($result->num_rows > 0) {
        echo "<table align=\"center\" border =\"1\" width=\"100%\">
            <tr align=\"center\">
                <td><b> No.</b></td>
                <td><b> Name</b></td>
                <td><b>Quantity</b></td>
                <td><b>Price(Rs.)</b></td>
                <td><b>Delete Item</b></td>
            </tr>";
```

```
// output data of each row
while($row = $result->fetch_assoc()) {
    echo "<tr align=\"center\">
        <td>".$row["id"]."</td>
        <td>".$row["name"]. "</td>
        <td>".$row["quantity"]."</td>
        <td>".$row["price"]. "</td>
        <td><a href='delete_function.php?id=".$row['id']."' title='Delete Item' data-
toggle='tooltip'><span class='glyphicon glyphicon-trash'></span></a></td></tr>";
    echo "</table>";
}
else {
    echo "0 results";
}
$connect->close();
?>

</div>
</div><p align="right"><a href="home.php">Go Home page</a></p>
</div>
</div>
</body>
```

Step 04: Create delete function

- ☐ Link the database connection.

```
require_once "dbconnection.php";
```

- ☐ Check the item id.

```
if(isset($_POST["id"]) && !empty($_POST["id"])) {  
  
    }
```

- ☐ Assign the item id value to \$id.

```
$id = $_POST["id"];
```

- ☐ Write delete MySQL query.

```
$sql_delete = "DELETE FROM item WHERE id=$id";
```

Step 04: Create delete function

- ❑ Delete query execution.

```
$result_delete = mysqli_query($connect, $sql_delete);
```

- ❑ Redirected to delete a form.

```
if($result_delete) {  
    header("Location: delete_form.php");  
}
```

- ❑ Connect action form.

```
<form action="<?php echo htmlspecialchars($_SERVER["PHP_SELF"]); ?>" method="post">
```

- ❑ Identify the item need to delete by using unique id.

```
<input type="hidden" name="id" value="<?php echo trim($_GET["id"]); ?>" />
```

Step 04: delete_function.php

- ❑ Save this file under the **htdocs** folder (**C/xampp/htdocs**) name should be **delete_function.php**

```
<?php
require_once 'dbconnection.php';
if(isset($_POST["id"]) && !empty($_POST["id"])) {
    $id = $_POST["id"];
    $sql_delete = "DELETE FROM item WHERE id=$id";
    $result_delete = mysqli_query($connect, $sql_delete);
    if ($result_delete) {
        header("Location: delete_form.php");
    }
}
else {
    if(empty(trim($_GET["id"]))) {
        header("location: error.php");
        exit();
    }
}
?>
```

Step 04: delete_function.php

```
<!DOCTYPE html>
<html lang="en">
<head>
<meta charset="UTF-8">
<title>View Record</title>
<link rel="stylesheet" href="https://maxcdn.bootstrapcdn.com/bootstrap/3.3.7/css/bootstrap.css">
<style type="text/css">
.wrapper{
    width: 500px;
    margin: 0 auto;
}
</style>
</head>
```

Step 04: delete_function.php

```
<body>
<div class="wrapper">
<div class="container-fluid">
<div class="row"><div class="col-md-12">
<div class="page-header">
<h1>Delete Record</h1>
</div>
<form action="<?php echo htmlspecialchars($_SERVER["PHP_SELF"]); ?>" method="post">
<div class="alert alert-danger fade in">
<input type="hidden" name="id" value="<?php echo trim($_GET["id"]); ?>" />
<p>Are you sure you want to delete this record?</p><br>
<p>
<input type="submit" value="Yes" class="btn btn-danger">
<a href="delete_form.php" class="btn btn-default">No</a>
</p>
</div>
</form>
</div></div></div></div>
</body>
</html>
```


Step 05: Test the delete function

- ☐ Open your web browser.
- ☐ Type localhost/delete_form.php in the search bar.
- ☐ Select the items need to delete among the items list.

PHP/MySQL Delete function

No.	Name	Quantity	Price(Rs.)	Delete Item
1	Sample Item	10	35.00	

[Go Home page](#)

Delete Record

Are you sure you want to delete this record?

Yes

No



Thank you!