
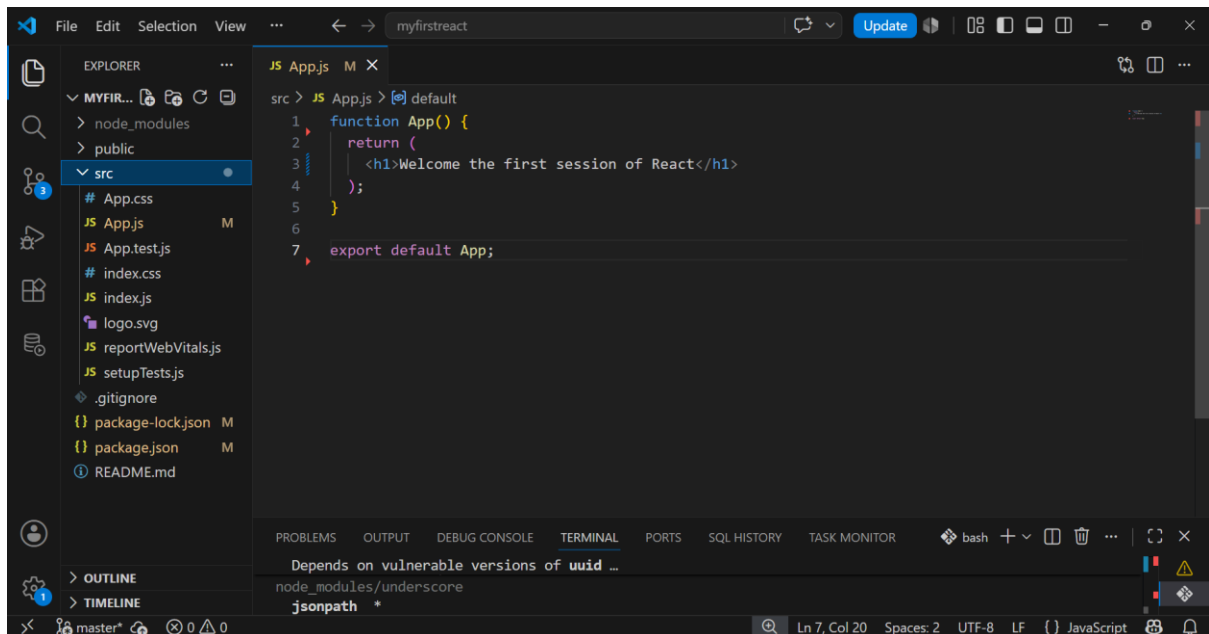


DIGITAL NURTURE 5.0 DEEPSKILLING

WEEK 5 – HANDS-ON

REACT

1. ReactJS-HOL

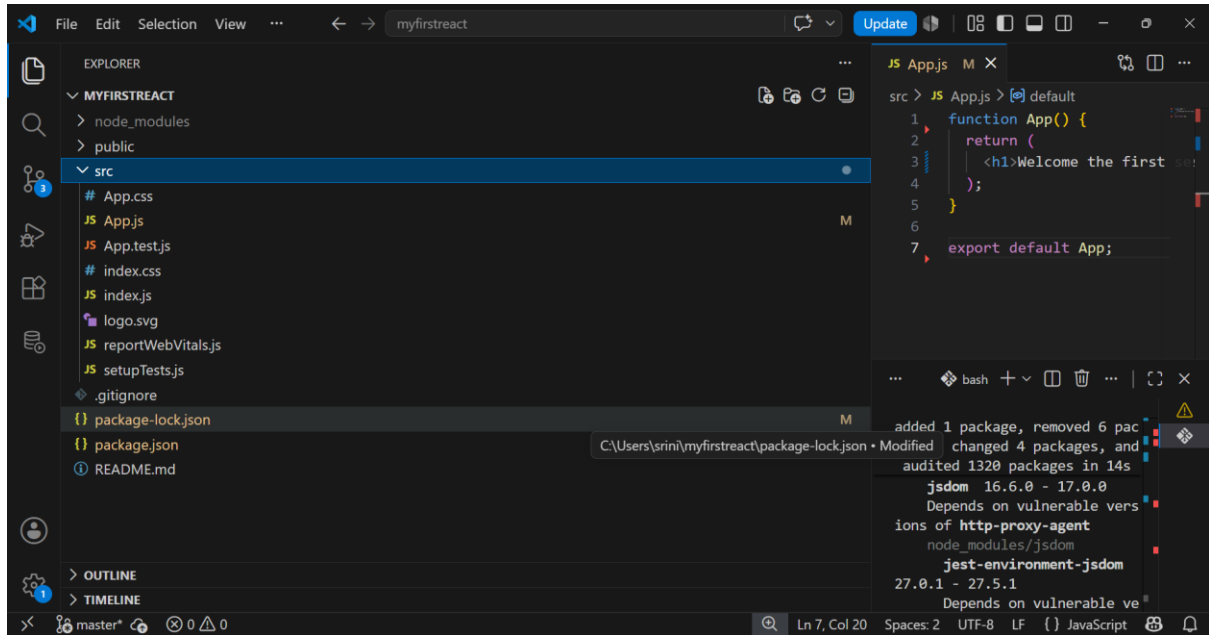

```
File Edit Selection View ... myfirstreact Update
EXPLORER
MYFIR...
node_modules
public
src
App.css
App.js
App.test.js
index.css
index.js
logo.svg
reportWebVitals.js
setupTests.js
.gitignore
package-lock.json
package.json
README.md
OUTLINE
TIMELINE
master*

JS App.js M X
src > JS App.js > default
1 function App() {

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS SQL HISTORY TASK MONITOR
bash + v
Depends on vulnerable versions of uuid
node_modules/sockjs

srini@KEERTHI-REDDY MINGW64 ~/myfirstreact (master)
$ npm start

> myfirstreact@0.1.0 start
> react-scripts start


(node:3424) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:3424) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view myfirstreact in the browser.


Local: http://localhost:3000
On Your Network: http://192.168.1.35:3000


Note that the development build is not optimized.


Ln 7, Col 20 Spaces: 2 UTF-8 LF {} JavaScript
```

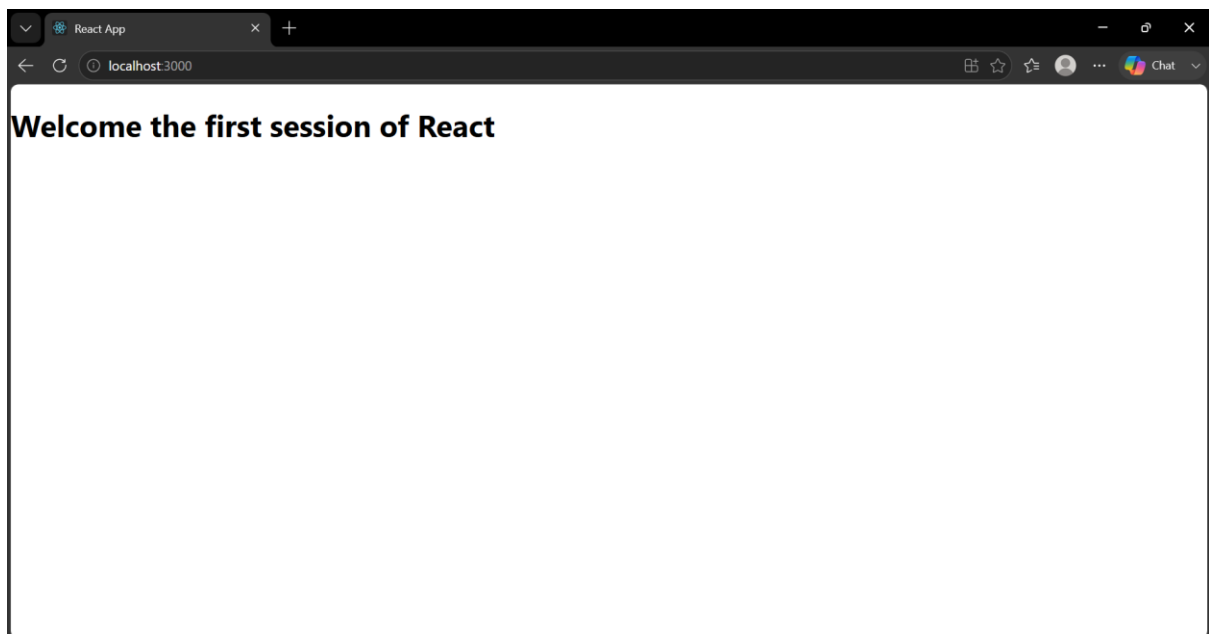


2. ReactJS-HOL

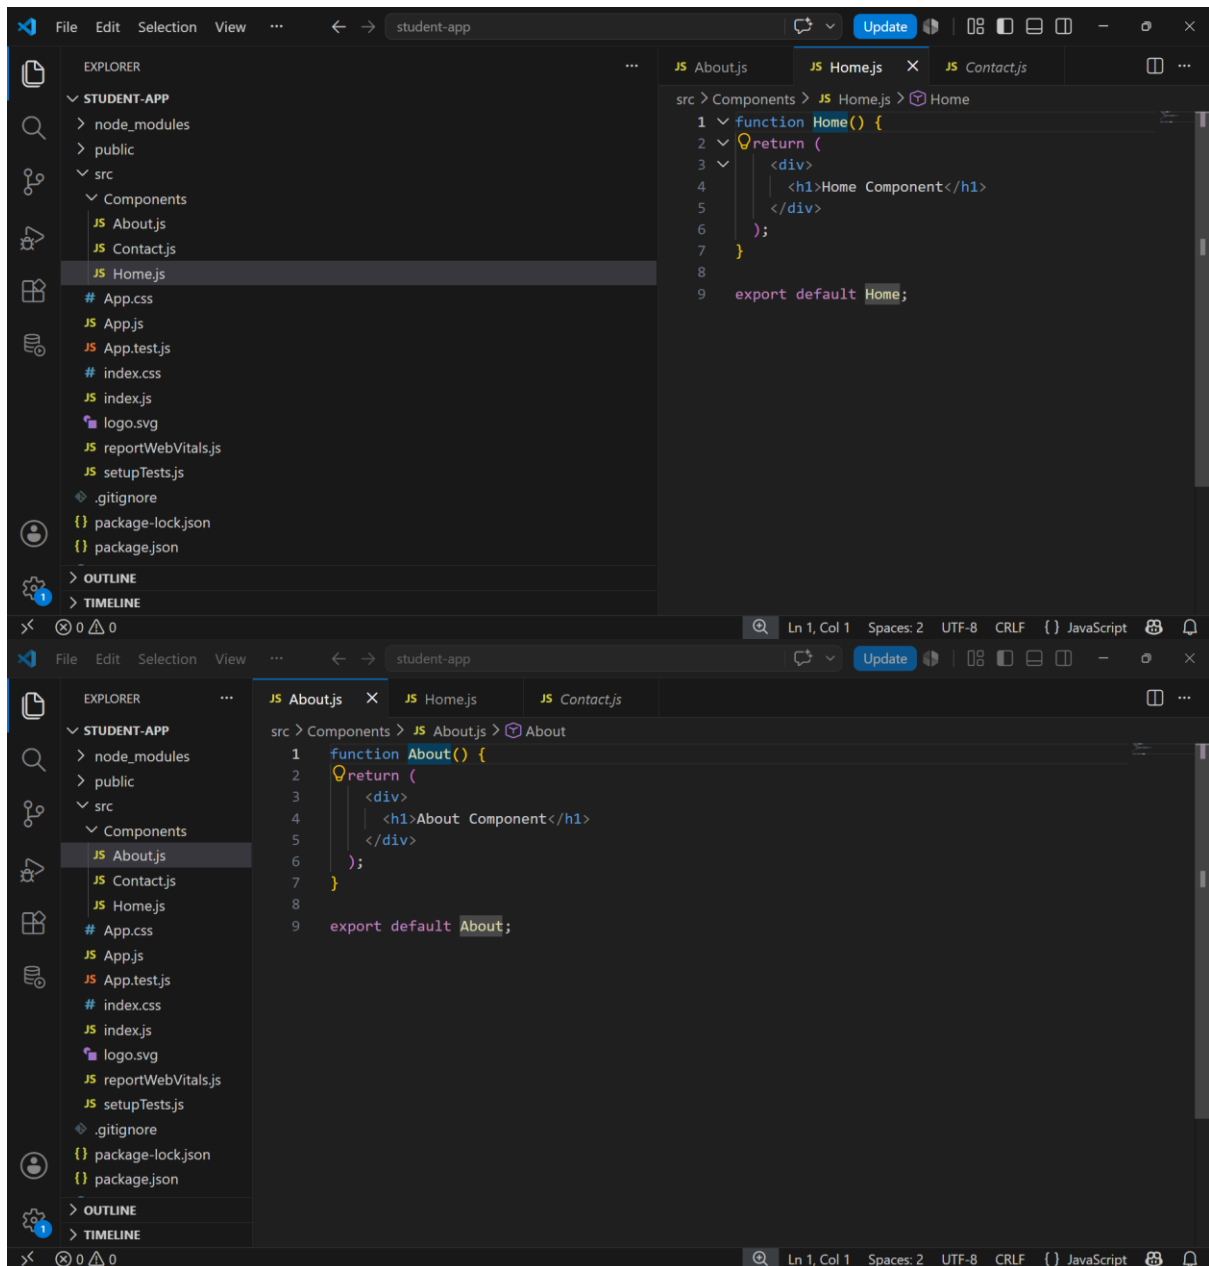


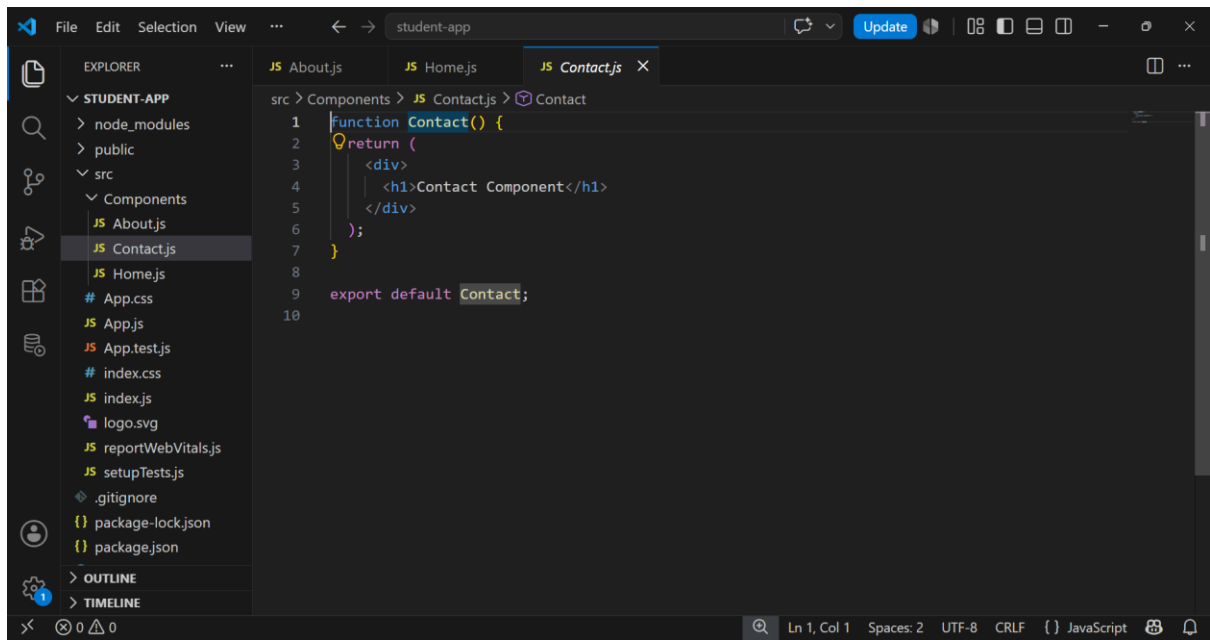


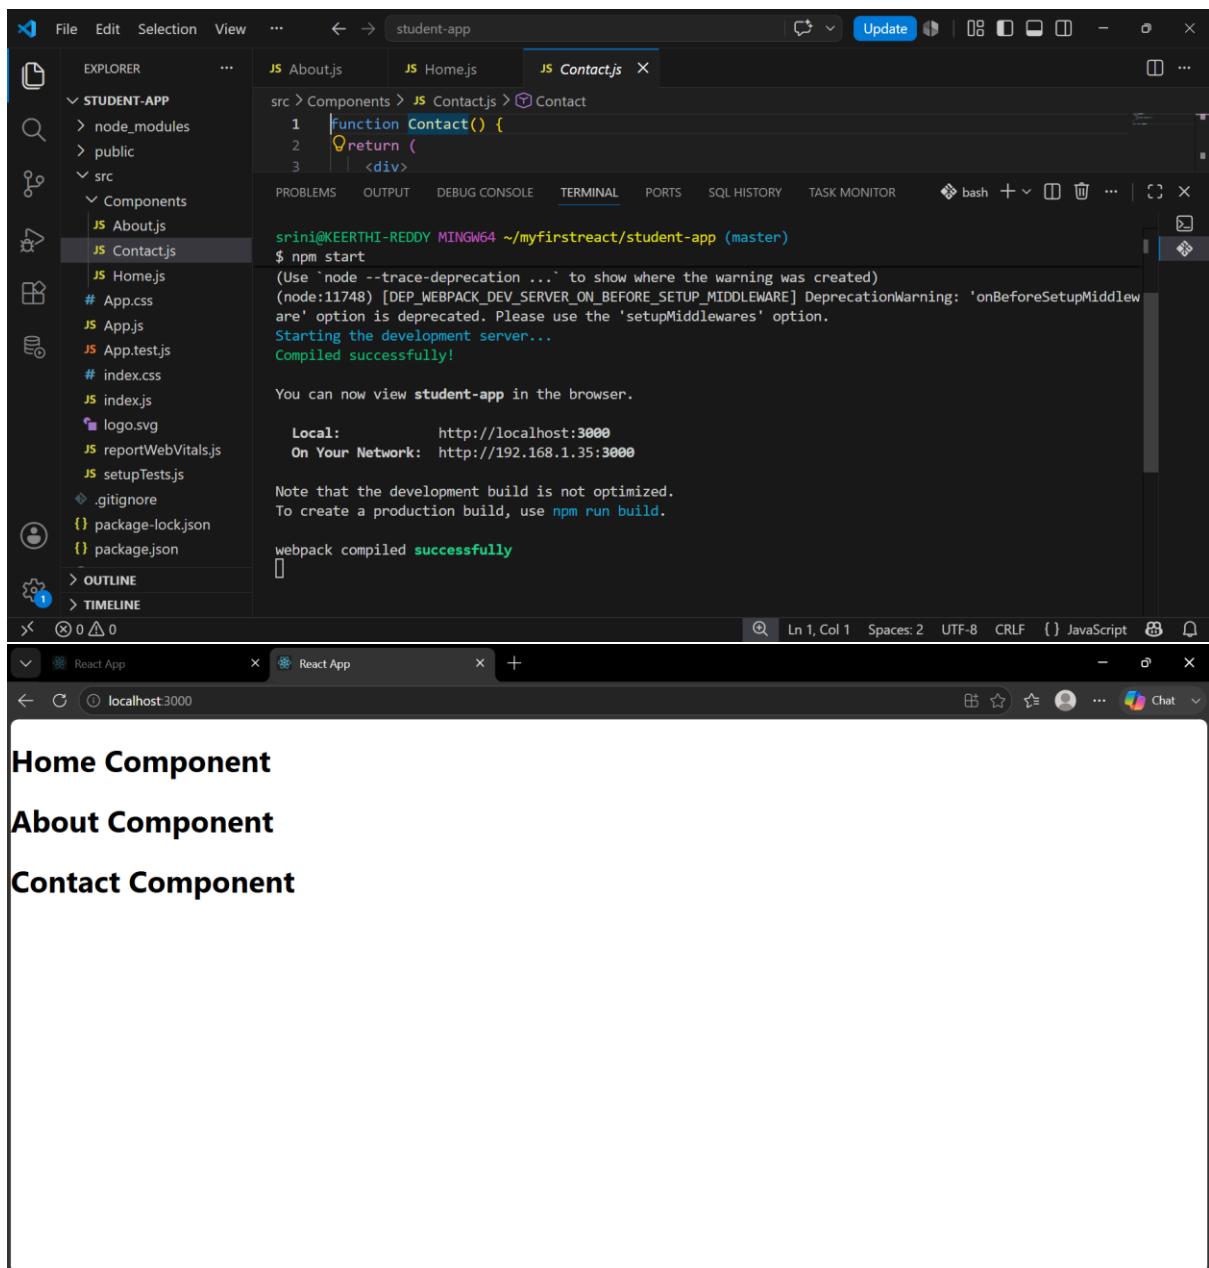


3. ReactJS-HOL

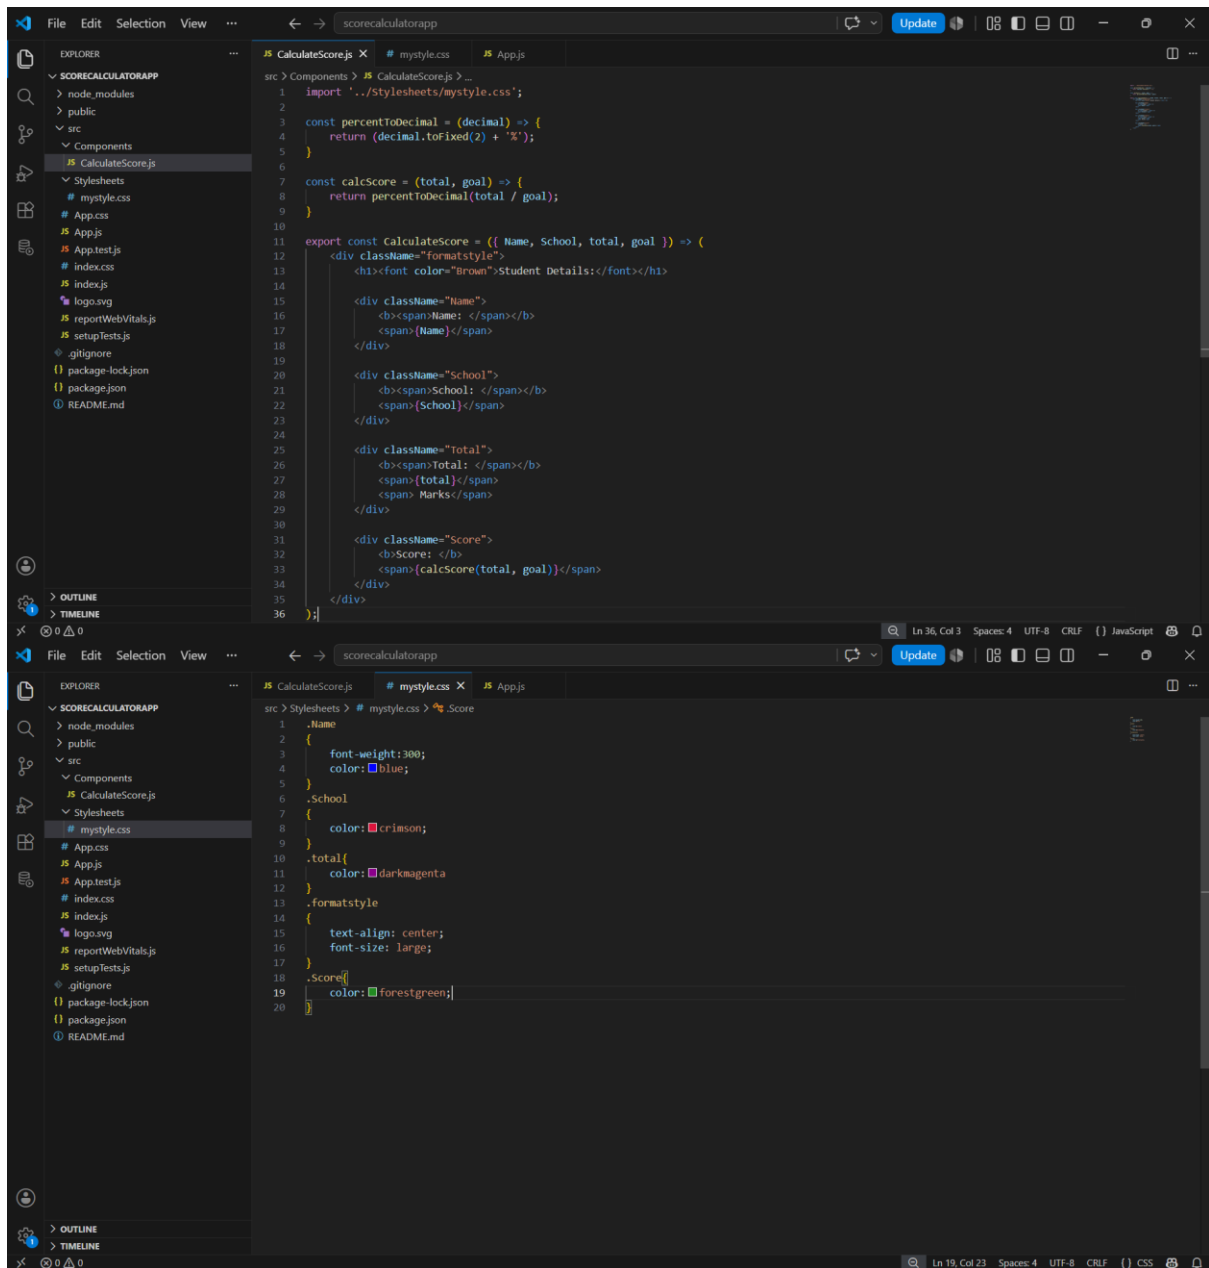

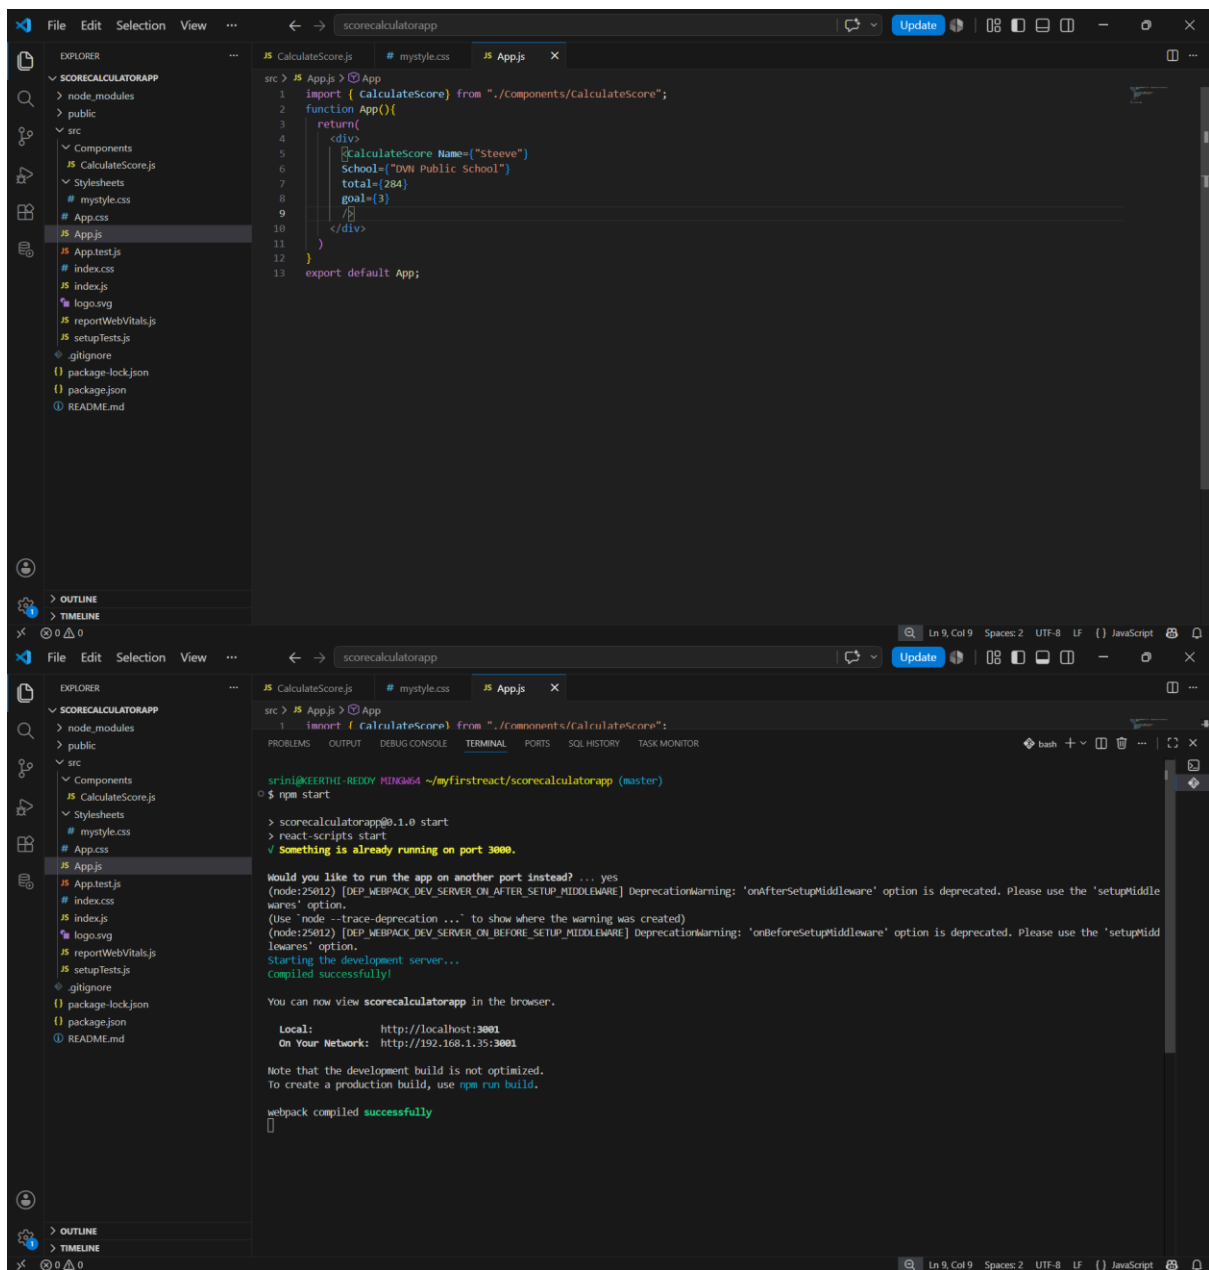

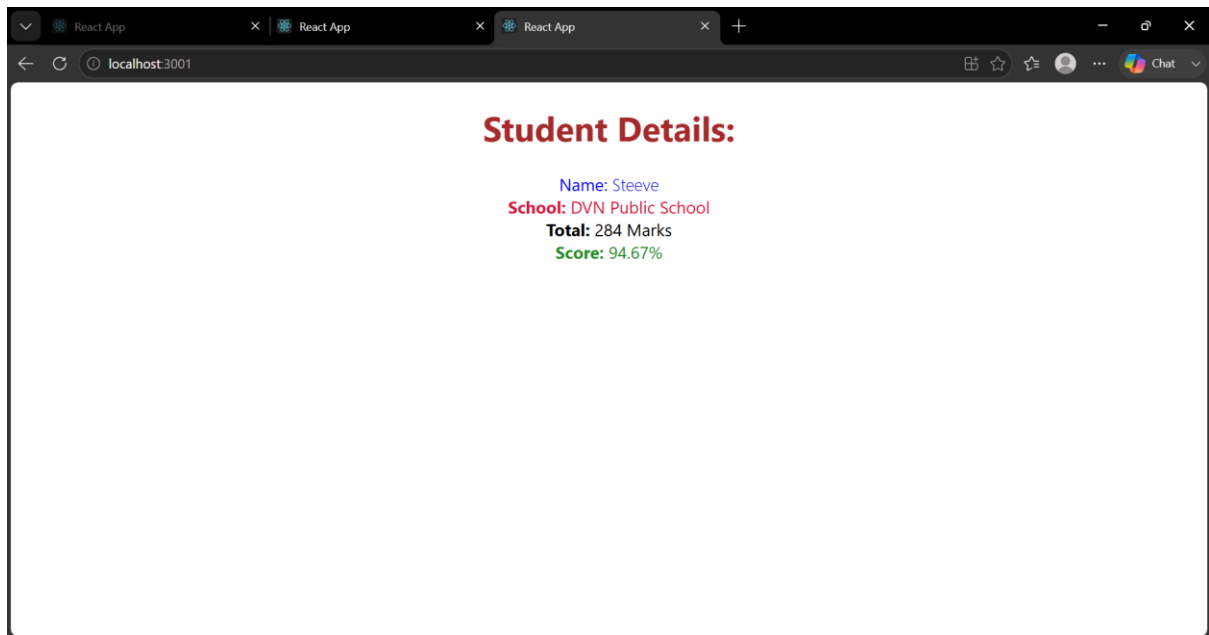

4. ReactJS-HOL

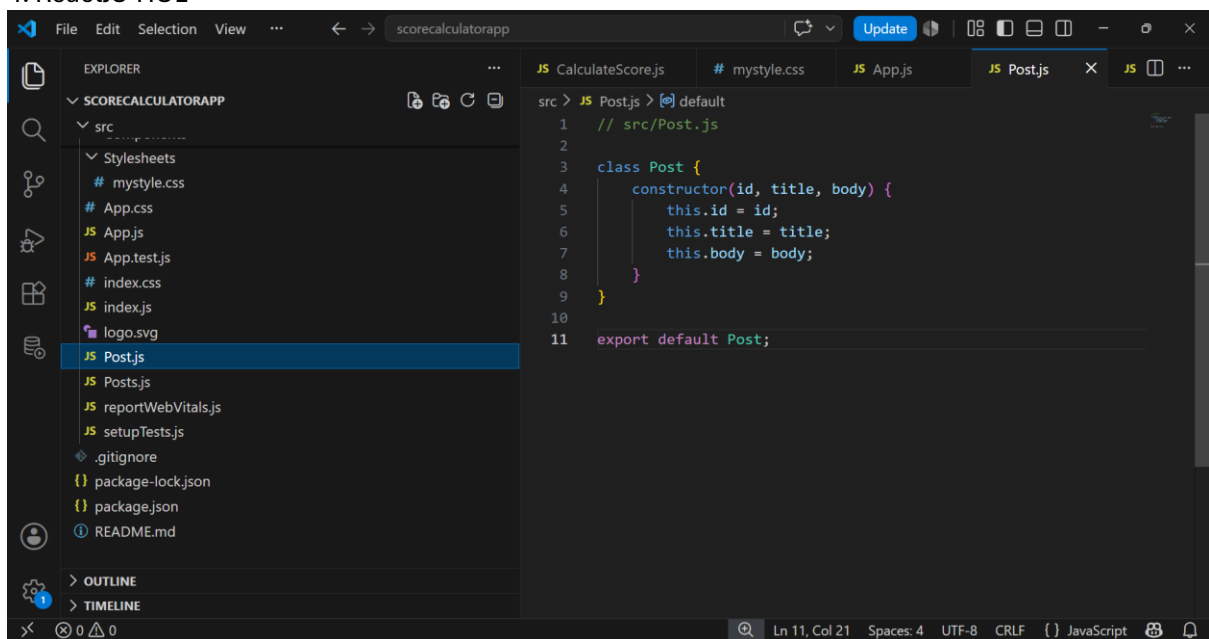


```
1 // src/Posts.js
2
3 import React, { Component } from "react";
4 import Post from "../Post";
5
6 class Posts extends Component {
7
8   constructor(props) {
9     super(props);
10
11     this.state = {
12       posts: []
13     };
14   }
15
16   loadPosts() {
17
18     fetch("https://jsonplaceholder.typicode.com/posts")
19       .then(response => response.json())
20       .then(data => {
21
22         const posts = data.map(item =>
23           new Post(item.id, item.title, item.body)
24         );
25
26         this.setState({
27           posts: posts
28         });
29       })
30       .catch(error => {
31         throw error;
32       });
33   }
34
35   componentDidMount() {
36     this.loadPosts();
37   }
38
39   componentDidCatch(error, info) {
40     alert("Error : " + error);
41   }
42
43   render() {
44
45   }
46 }
```

```
1 // src/Posts.js
2
3 import React, { Component } from "react";
4 import Post from "../Post";
5
6 class Posts extends Component {
7
8   constructor(props) {
9     super(props);
10
11     this.state = {
12       posts: []
13     };
14   }
15
16   loadPosts() {
17
18     fetch("https://jsonplaceholder.typicode.com/posts")
19       .then(response => response.json())
20       .then(data => {
21
22         const posts = data.map(item =>
23           new Post(item.id, item.title, item.body)
24         );
25
26         this.setState({
27           posts: posts
28         });
29       })
30       .catch(error => {
31         throw error;
32       });
33   }
34
35   componentDidMount() {
36     this.loadPosts();
37   }
38
39   componentDidCatch(error, info) {
40     alert("Error : " + error);
41   }
42
43   render() {
44     return (
45       <div>
46         <h1>Blog Posts</h1>
47         <div key={post.id}>
48           <h2>{post.title}</h2>
49           <p>{post.body}</p>
50         </div>
51       </div>
52     );
53   }
54
55   export default Posts;
56 }
```

VS Code Explorer

SCORE...

blogapp

- node_modules
- public
- src
 - App.css
 - App.js
 - App.test.js
 - index.css
 - index.js
 - logo.svg
 - reportWebVitals.js
 - setupTests.js
- .gitignore
- package-lock.json

- OUTLINE
- TIMELINE

CalculateScore.js

mystyle.css

App.js

Post.js

Posts.js

```
src > JS App.js > default
1  import Posts from "../Posts";
2
3  function App() {
4    return (
5      <div>
6        <Posts />
7      </div>
8    );
9  }
10
11 export default App;
```

Ln 11, Col 20

Spaces: 2

UTF-8

LF

{ }

JavaScript

React App

React App

React App

React App

React App

+

-

o

x

localhost:3002

Chat

Blog Posts

sunt aut facere repellat provident occaecati excepturi optio reprehenderit

quia et suscipit suscipit recusandae consequuntur expedita et cum reprehenderit molestiae ut ut quas totam nostrum rerum est autem sunt rem eveniet architecto

qui est esse

est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla


ea molestias quasi exercitationem repellat qui ipsa sit aut

et iusto sed quo iure voluptatem occaecati omnis eligendi aut ad voluptatem doloribus vel accusantium quis pariatur molestiae porro eius odio et labore et velit aut


eum et est occaecati


ullam et saepe reiciendis voluptatem adipisci sit amet autem assumenda provident rerum culpa quis hic commodi nesciunt rem tenetur doloremque ipsam iure quis sunt voluptatem rerum illo velit

nesciunt quas odio

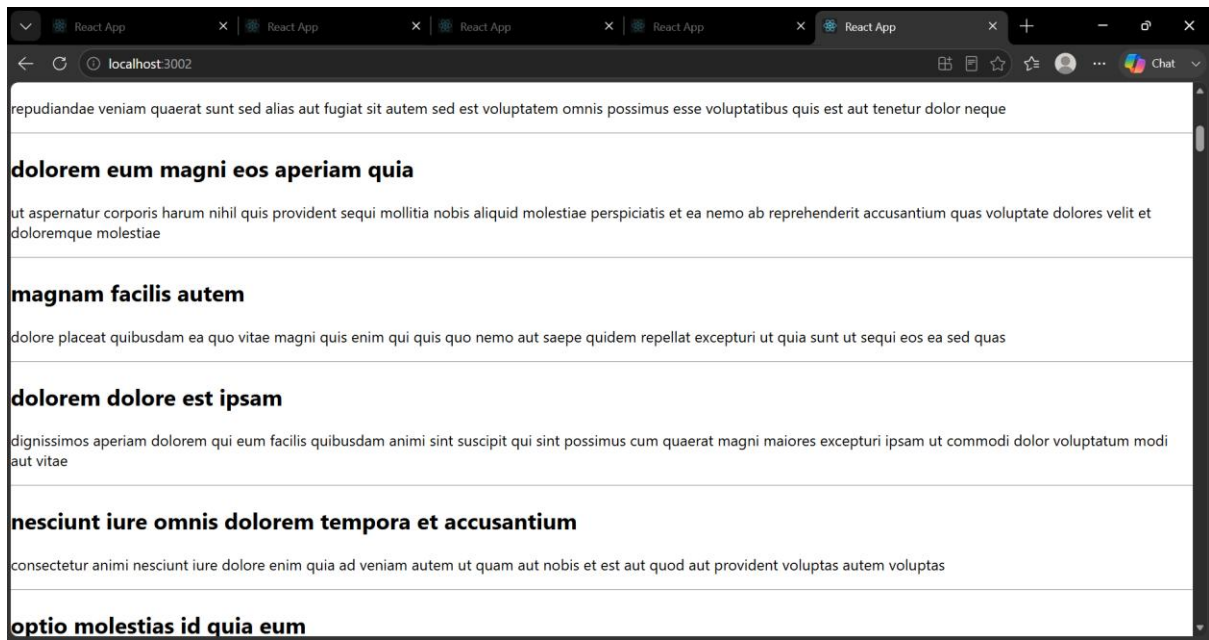


5.ReactJS-HOL

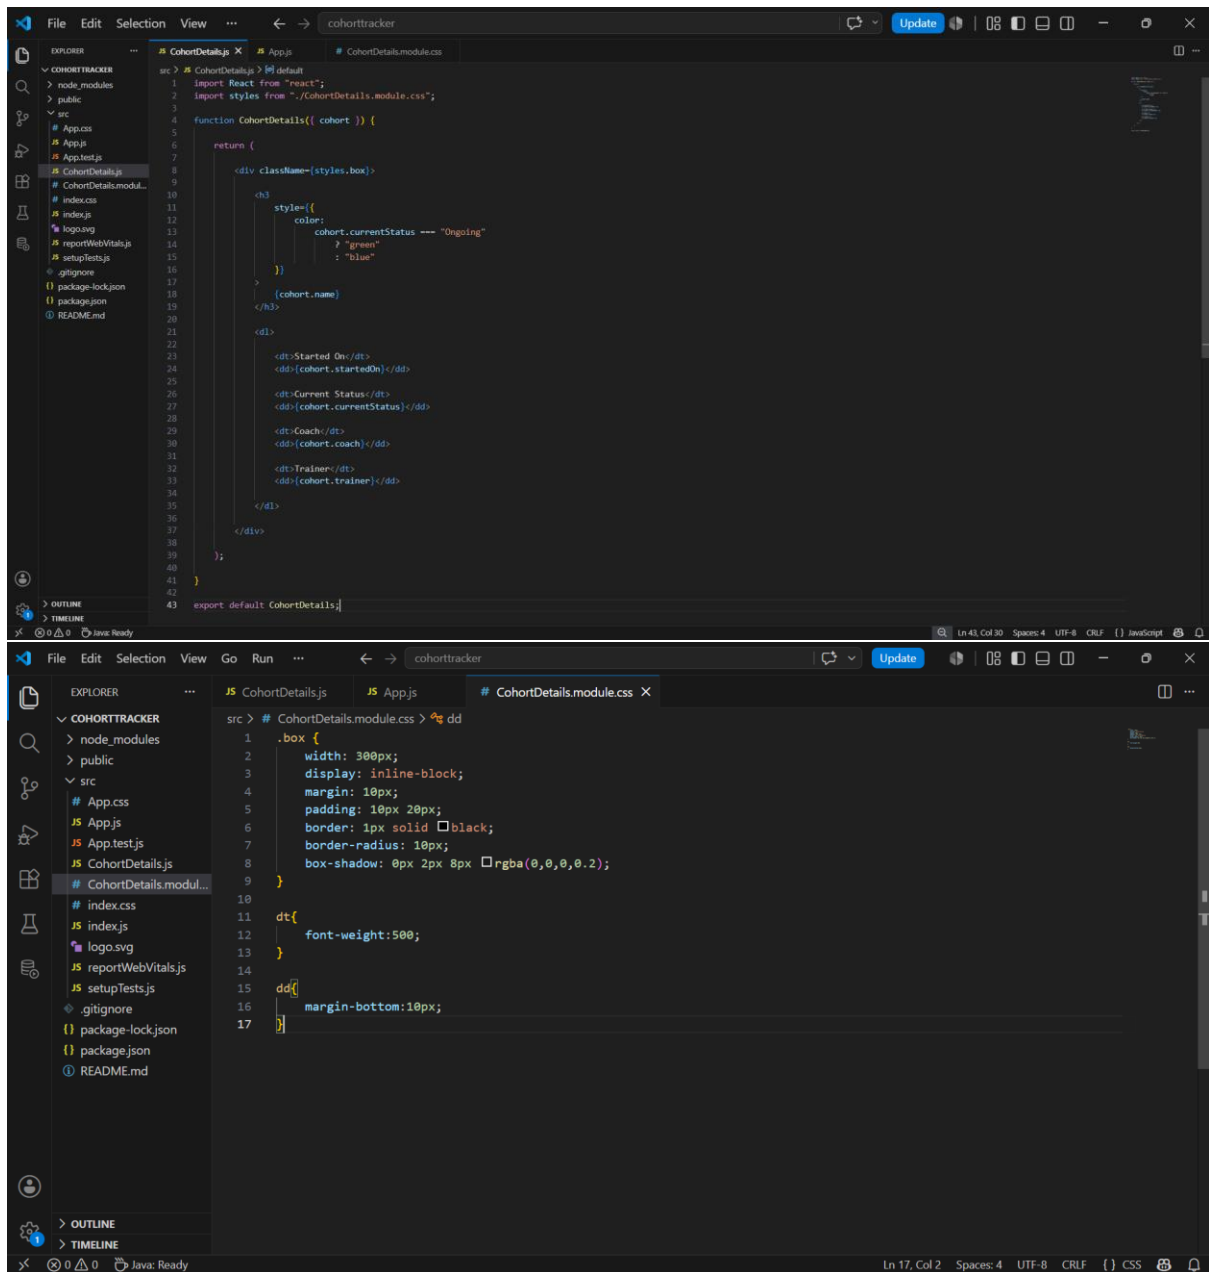


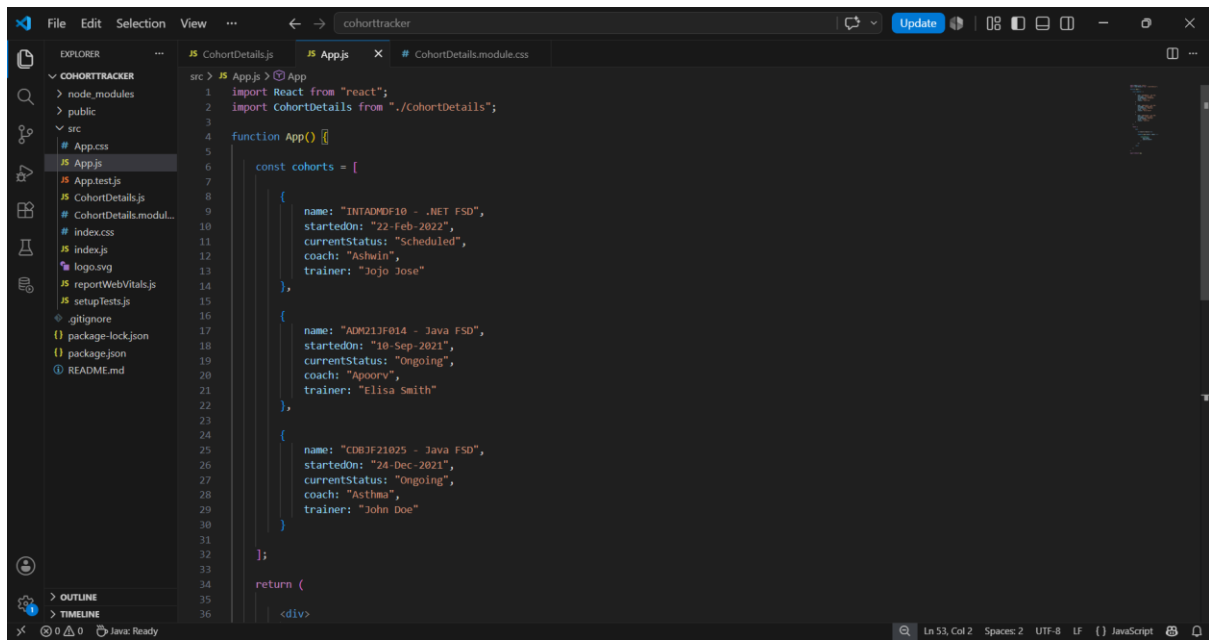


```
1 import React from "react";
2 import CohortDetails from "../CohortDetails";
3
4 function App() {
5
6   const cohorts = [
7
8     {
9       name: "INTADKDF10 - .NET FSD",
10      startedOn: "22-Feb-2022",
11      currentStatus: "Scheduled",
12      coach: "Ashwin",
13      trainer: "Jojo Jose"
14    },
15
16    {
17      name: "ADKQ1JF8B14 - Java FSD",
18      startedOn: "18-Sep-2021",
19      currentStatus: "Ongoing",
20      coach: "Apoorv",
21      trainer: "Elisa Smith"
22    },
23
24    {
25      name: "CDBJF21025 - Java FSD",
26      startedOn: "24-Dec-2021",
27      currentStatus: "Ongoing",
28      coach: "Asthma",
29      trainer: "John Doe"
30    }
31  ];
32
33  return (
34    <div>
```

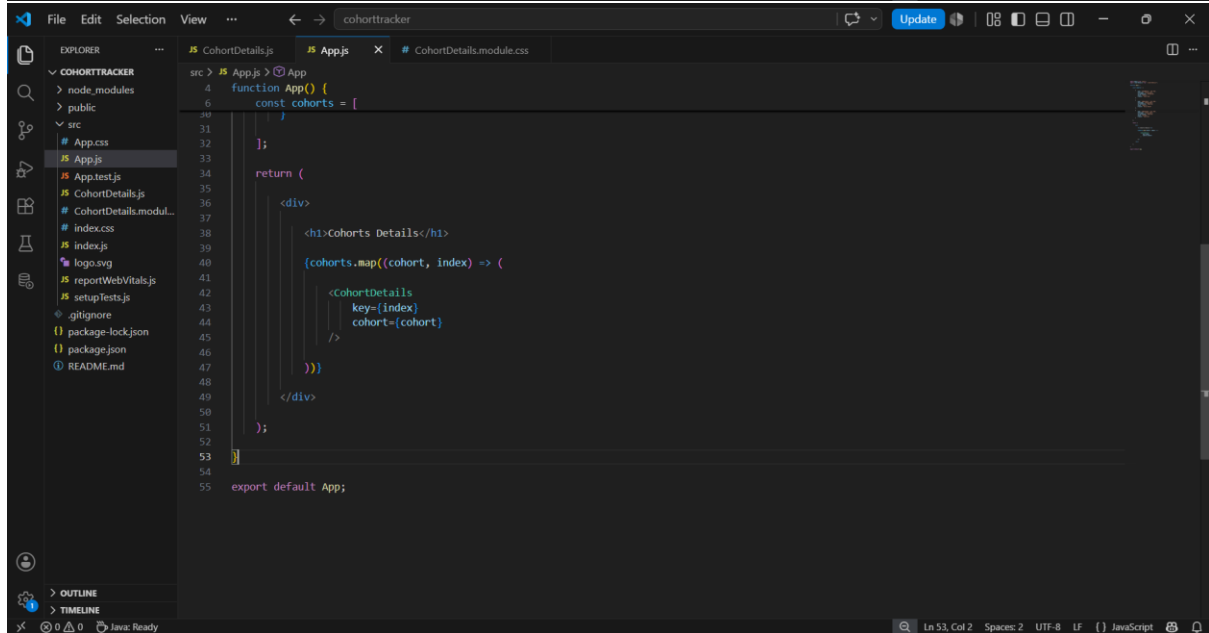

```
35    <div>
36      <h1>Cohorts Details</h1>
37
38      {cohorts.map((cohort, index) => (
39
40        <cohortDetails
41          key={index}
42          cohort={cohort}
43        />
44      ))}
45    </div>
46  );
47
48  export default App;
```

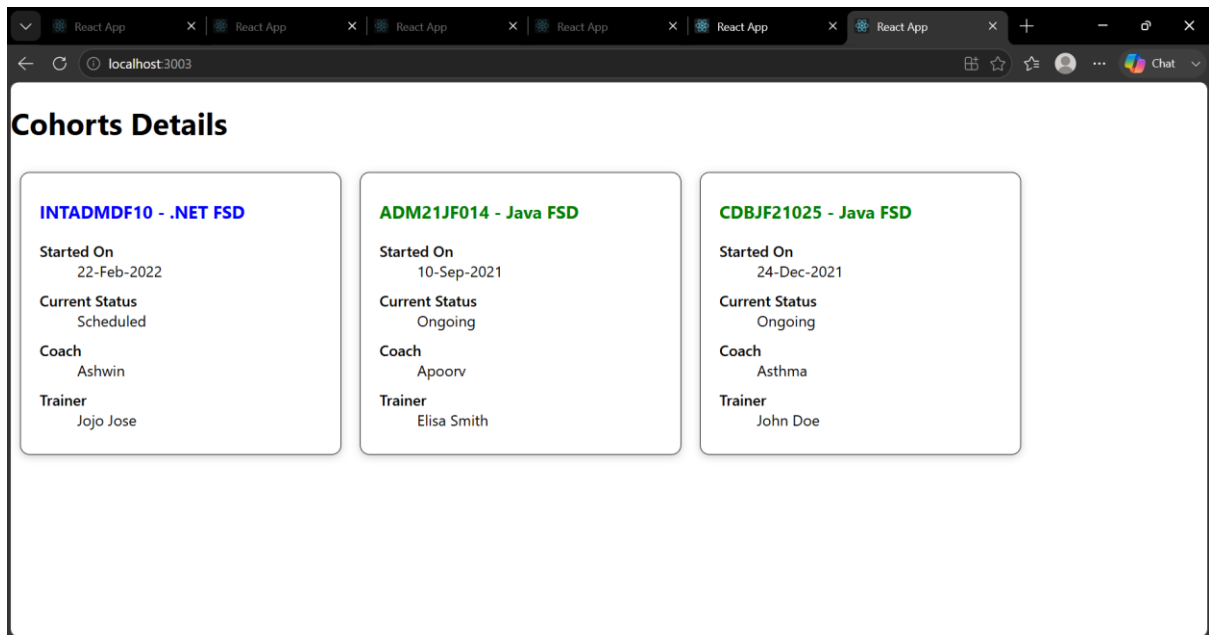

9.ReactJS-HOL

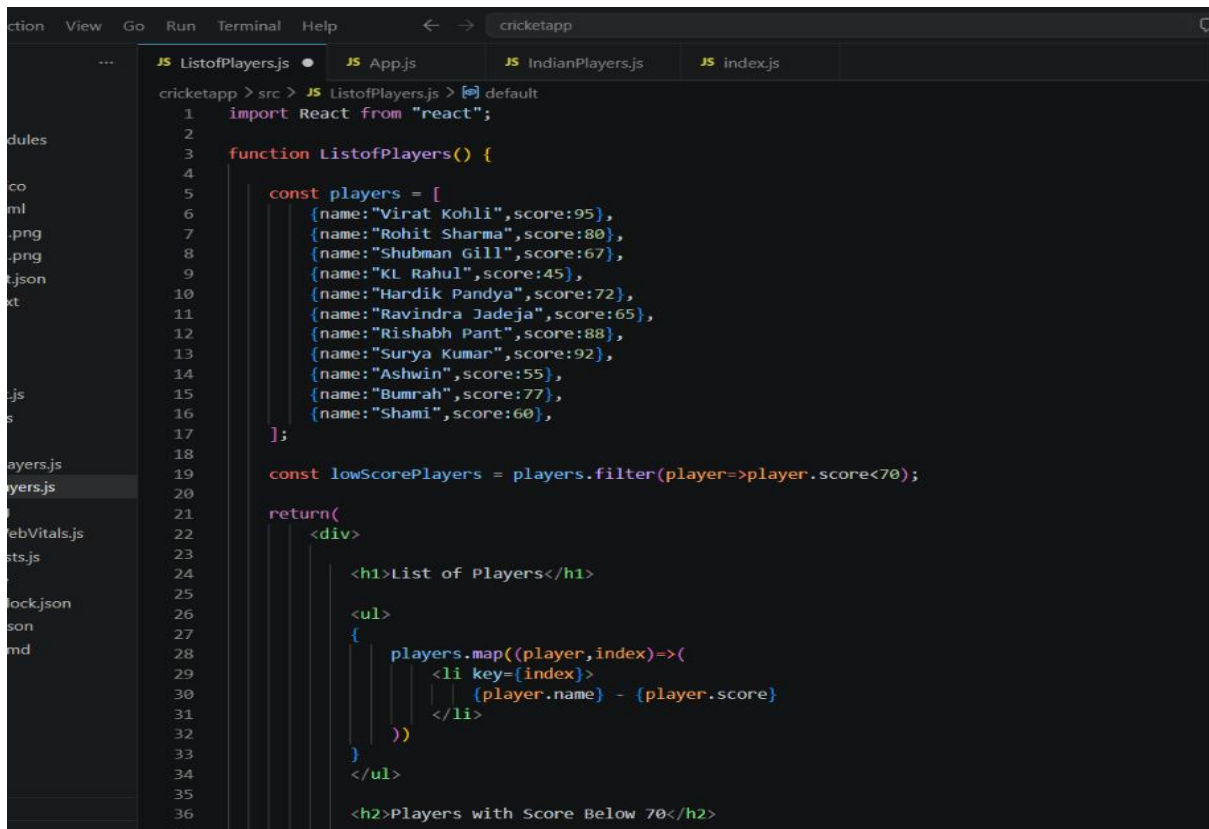



```
JS ListofPlayers.js JS App.js JS IndianPlayers.js JS index.js
cricketapp > src > JS ListofPlayers.js > default
3 function ListofPlayers() {
22     <div>
23     <h1>List of Players</h1>
24     <ul>
25     {
26         players.map((player,index)=>{
27             <li key={index}>
28                 {player.name} - {player.score}
29             </li>
30         })
31     }
32     </ul>
33     <h2>Players with Score Below 70</h2>
34     <ul>
35     {
36         lowScorePlayers.map((player,index)=>{
37             <li key={index}>
38                 {player.name} - {player.score}
39             </li>
40         })
41     }
42     </ul>
43     </div>
44     );
45 }
46 export default ListofPlayers;
```

```
File Edit Selection View Go Run Terminal Help cricketapp
EXPLORER
CRICKETAPP
cricketapp
node_modules
public
  favicon.ico
  index.html
  logo192.png
  logo512.png
  manifest.json
  robots.txt
src
  App.css
  App.js
  App.test.js
  index.css
  index.js
  IndianPlayers.js
  ListofPlayers.js
  logo.svg
  reportWebVitals.js
  setupTests.js
.gitignore
package-lock.json
package.json

JS ListofPlayers.js JS App.js JS IndianPlayers.js JS index.js
cricketapp > src > JS App.js > App > flag
1 import React from "react";
2 import ListofPlayers from "../ListofPlayers";
3 import IndianPlayers from "../IndianPlayers";
4
5 function App() {
6     const flag = false;
7
8     if (flag) {
9         return <ListofPlayers />;
10     } else {
11         return <IndianPlayers />;
12     }
13 }
14
15 export default App;
```

```
cricketapp > src > JS IndianPlayers.js > default
1  import React from "react";
2
3  function IndianPlayers() {
4
5      const players = [
6          "Virat",
7          "Rohit",
8          "Gill",
9          "Rahul",
10         "Hardik",
11         "Jadeja"
12     ];
13
14     // Destructuring
15     const [p1, p2, p3, p4, p5, p6] = players;
16
17     const T20Players = [
18         "Virat",
19         "Rohit",
20         "Surya",
21         "Hardik"
22     ];
23
24     const RanjiPlayers = [
25         "Sarfaraz",
26         "Jaiswal",
27         "Ruturaj",
28         "Mukesh"
29     ];
30
31     const mergedPlayers = [...T20Players, ...RanjiPlayers];
32
33     return (
```

```
3  function IndianPlayers() {
30
31     const mergedPlayers = [...T20Players, ...RanjiPlayers];
32
33     return (
34         <div>
35             <h2>Odd Team Players</h2>
36
37             <ul>
38                 <li>{p1}</li>
39                 <li>{p3}</li>
40                 <li>{p5}</li>
41             </ul>
42
43             <h2>Even Team Players</h2>
44
45             <ul>
46                 <li>{p2}</li>
47                 <li>{p4}</li>
48                 <li>{p6}</li>
49             </ul>
50
51             <h2>Merged Players</h2>
52
53             <ul>
54                 {mergedPlayers.map((player, index) => (
55                     <li key={index}>{player}</li>
56                 ))}
57             </ul>
58         </div>
59     );
60
61 }
62
63 export default IndianPlayers;
```

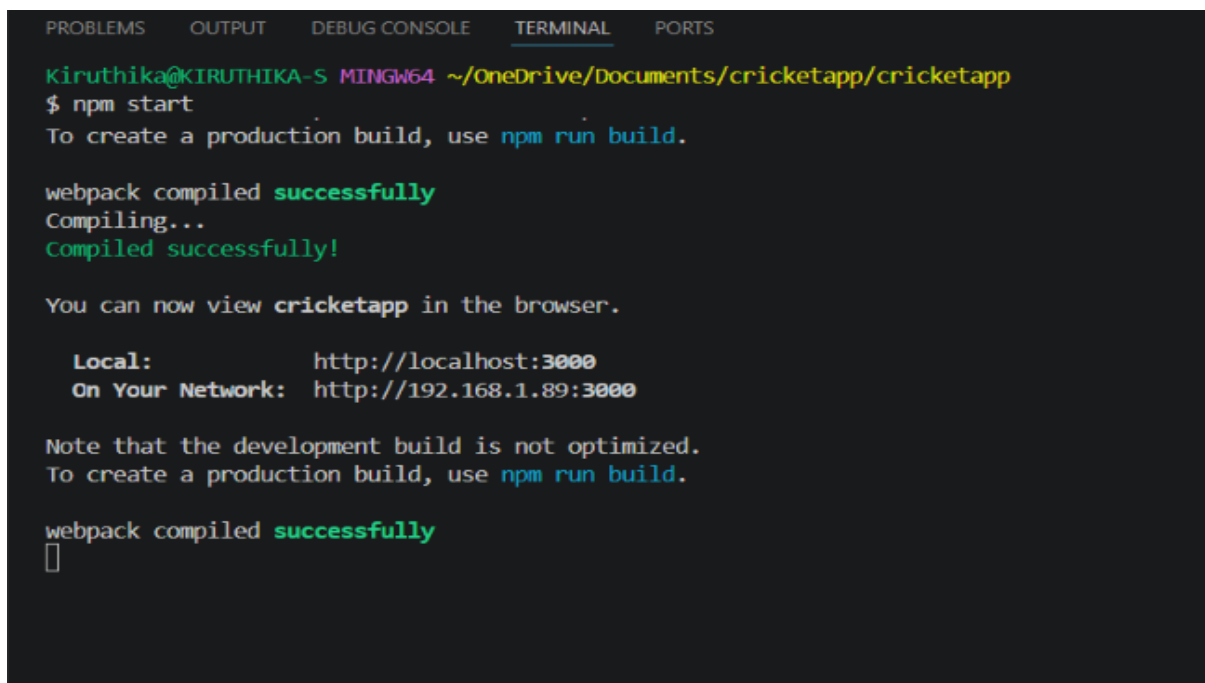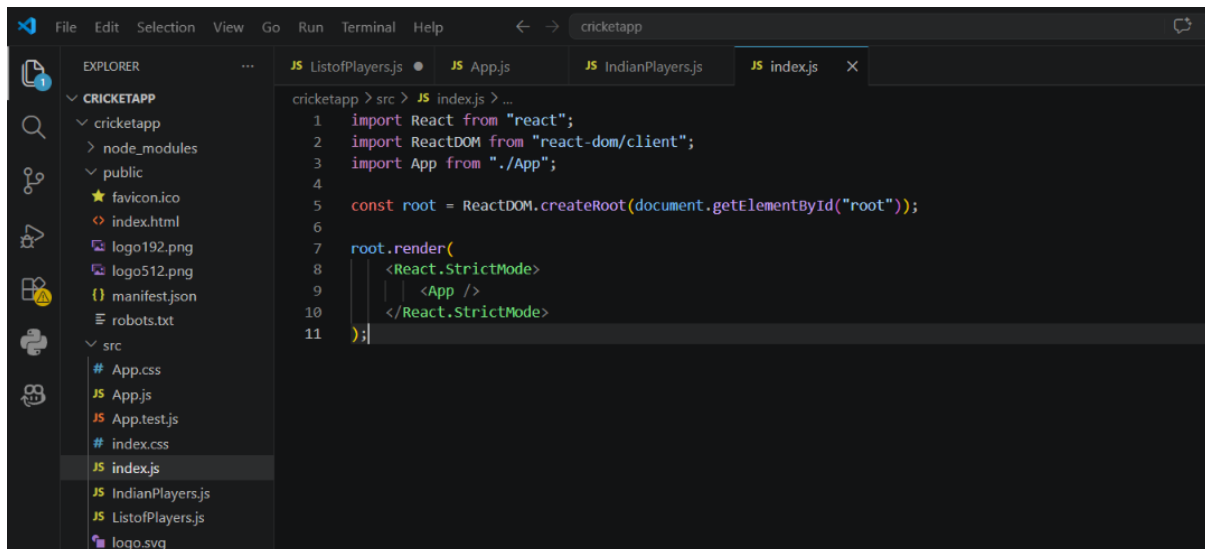Odd Team Players

- Virat
- Gill
- Hardik

Even Team Players

- Rohit
- Rahul
- Jadeja

Merged Players

- Virat
- Rohit
- Surya
- Hardik
- Sarfaraz
- Jaiswal
- Ruturaj
- Mukesh

List of Players

- Virat Kohli - 95
- Rohit Sharma - 80
- Shubman Gill - 67
- KL Rahul - 45
- Hardik Pandya - 72
- Ravindra Jadeja - 65
- Rishabh Pant - 88
- Surya Kumar - 92
- Ashwin - 55
- Bumrah - 77
- Shami - 60

Players with Score Below 70

- Shubman Gill - 67
- KL Rahul - 45
- Ravindra Jadeja - 65
- Ashwin - 55
- Shami - 60

```
JS App.js X React App JS index.js
src > JS App.js > App
1 import React from "react";
2 import officeImage from "../office.jpg";
3
4 function App() {
5
6   const office = {
7     name: "Smart Office",
8     rent: 55000,
9     address: "Anna Nagar, Chennai"
10  };
11
12  const officeList = [
13    {
14      name: "Smart Office",
15      rent: 55000,
16      address: "Anna Nagar, Chennai"
17    },
18    {
19      name: "Tech Park",
20      rent: 75000,
21      address: "Electronic City, Bangalore"
22    },
23    {
24      name: "Business Hub",
25      rent: 45000,
26      address: "Hitech City, Hyderabad"
27    },
28    {
29      name: "Corporate Plaza",
30      rent: 90000,
31      address: "T Nagar, Chennai"
32    }
33  ];
34
35  return (
36    <div style={{ padding: "20px" }}>
37      <h1>Office Space Rental App</h1>
```

```
JS App.js X React App JS index.js
src > JS App.js > App
4 function App() {
36 <div style={{ padding: 20px }}>
37   <h1>Office Space Rental App</h1>
38
39   <img
40     src={officeImage}
41     alt="Office"
42     width="500"
43     height="300"
44   />
45
46   <h2>Office Details</h2>
47
48   <p><b>Name:</b> {office.name}</p>
49
50   <p
51     style={{
52       color: office.rent < 60000 ? "red" : "green"
53     }}
54   >
55     <b>Rent:</b> ₹{office.rent}
56   </p>
57
58   <p><b>Address:</b> {office.address}</p>
59
60   <hr />
61
62   <h2>Office Space List</h2>
63
64   {officeList.map((item, index) => (
65     <div key={index}>
66       <p><b>Name:</b> {item.name}</p>
67
68       <p
69         style={{
70           color: item.rent < 60000 ? "red" : "green"
71         }}
72       >
```

```

4   function App() {
64     {officeList.map((item, index) => (
65       <div key={index}>
66         <p><b>Name:</b> {item.name}</p>
67
68         <p
69           style={{
70             color: item.rent < 60000 ? "red" : "green"
71           }}
72         >
73           <b>Rent:</b> ₹{item.rent}
74         </p>
75
76         <p><b>Address:</b> {item.address}</p>
77
78         <hr />
79       </div>
80     )]}
81
82   </div>
83   );
84 }
85
86 export default App;

```

tion View Go Run Terminal Help ← → officespacereentalapp



... JS App.js React App JS index.js X

src > JS index.js > ...

```

1   import React from "react";
2   import ReactDOM from "react-dom/client";
3   import App from "./App";
4
5   const root = ReactDOM.createRoot(document.getElementById("root"));
6
7   root.render(
8     <React.StrictMode>
9       <App />
10    </React.StrictMode>
11  );

```

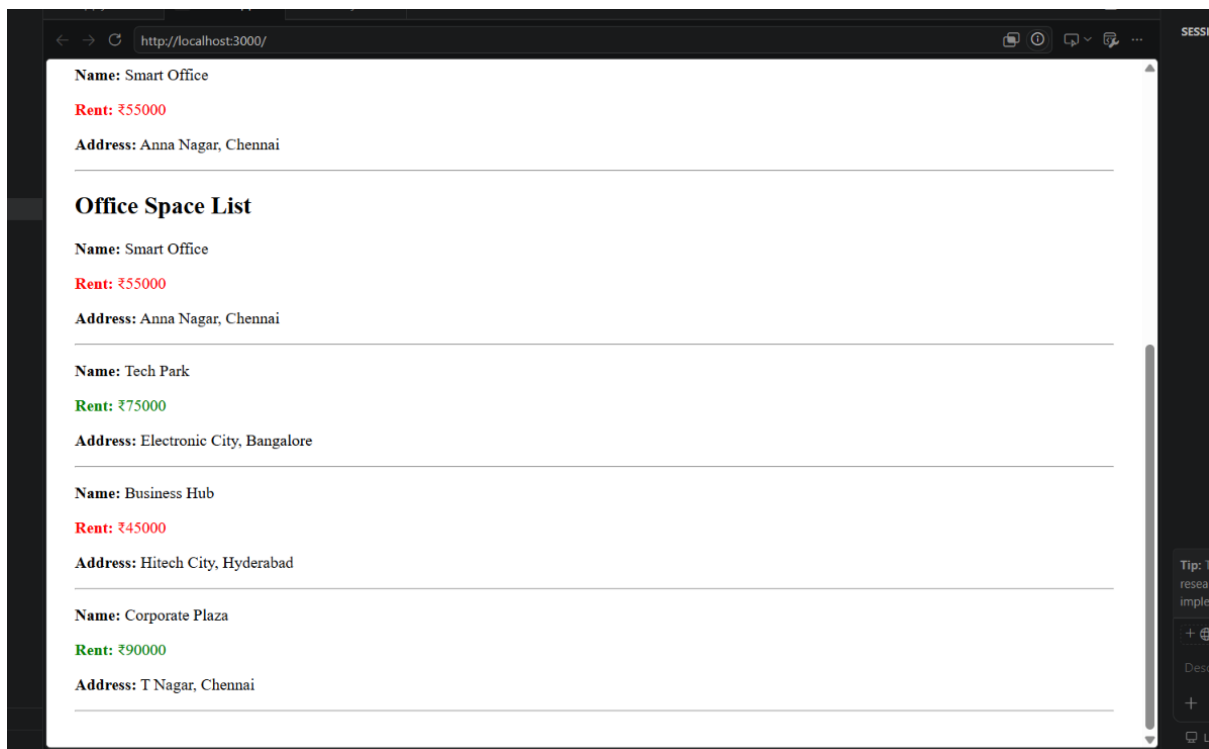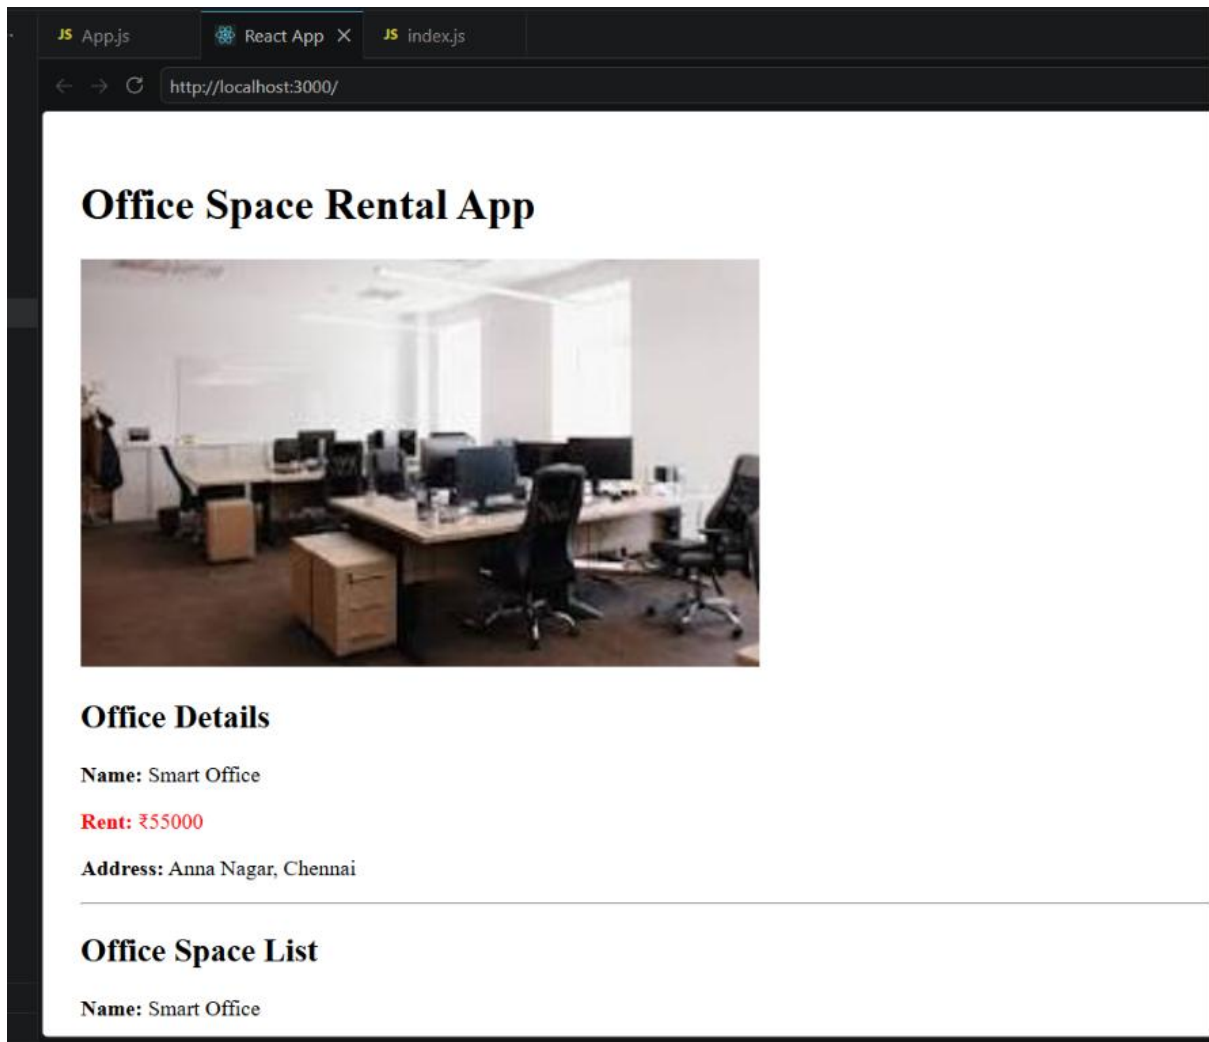

11.ReactJS-HOL

```
App.jsx • CurrencyConverter.jsx • # App.css • # index.css reactlab
src > components > CurrencyConverter.jsx > CurrencyConverter
1  import { useState } from "react";
2  export default function CurrencyConverter() {
3    const [amount, setAmount] = useState("");
4    const [currency, setCurrency] = useState("");
5    function handleSubmit(e) {
6      e.preventDefault();
7      const euro = Number(amount) / 90;
8      alert(`Converting to Euro Amount is ${euro.toFixed(2)}`);
9    }
10   return (
11     <div className="converter">
12       <h1>Currency Converter!!!</h1>
13
14       <form onSubmit={handleSubmit}>
15         <label>Amount : </label>
16         <input
17           type="number"
18           value={amount}
19           onChange={(e) => setAmount(e.target.value)}
20         />
21
22         <br /><br />
23
24         <label>Currency : </label>
25         <input
26           type="text"
27           value={currency}
28           onChange={(e) => setCurrency(e.target.value)}
29         />
30         <br /><br />
31         <button type="submit">Submit</button>
32       </form>
33     </div>
34   );
35 }
```


```
App.jsx • CurrencyConverter.jsx • # App.css • # index.css reactlab
src > App.jsx > default
5  function App() {
15 }
16
17  function sayWelcome() {
18    alert("welcome");
19  }
20
21  function onPress() {
22    alert("I was clicked");
23  }
24
25  return (
26    <div className="container">
27      <h2>{count}</h2>
28
29      <button onClick={increment}>Increment</button>
30      <br /><br />
31
32      <button onClick={decrement}>Decrement</button>
33      <br /><br />
34
35      <button onClick={sayWelcome}>Say Welcome</button>
36      <br /><br />
37
38      <button onClick={onPress}>Click on me</button>
39
40      <CurrencyConverter />
41    </div>
42  );
43 }
44
45 export default App;
```

```
src > # App.css > input
1  .container{
2    | padding:20px;
3    | font-family:Arial;
4  }
5
6  button{
7    | width:120px;
8    | padding:8px;
9    | margin:5px 0;
10 }
11
12 .converter{
13 | margin-top:30px;
14 }
15
16 .converter h1{
17 | color: green;
18 }
19
20 input{
21 | width:180px;
22 | padding:6px;
23 }
```

```
src > # index.css > body
1  body{
2    | margin:20px;
3    | font-family:Arial, sans-serif;
4  }
```


Count is 10

12.ReactJS-HOL

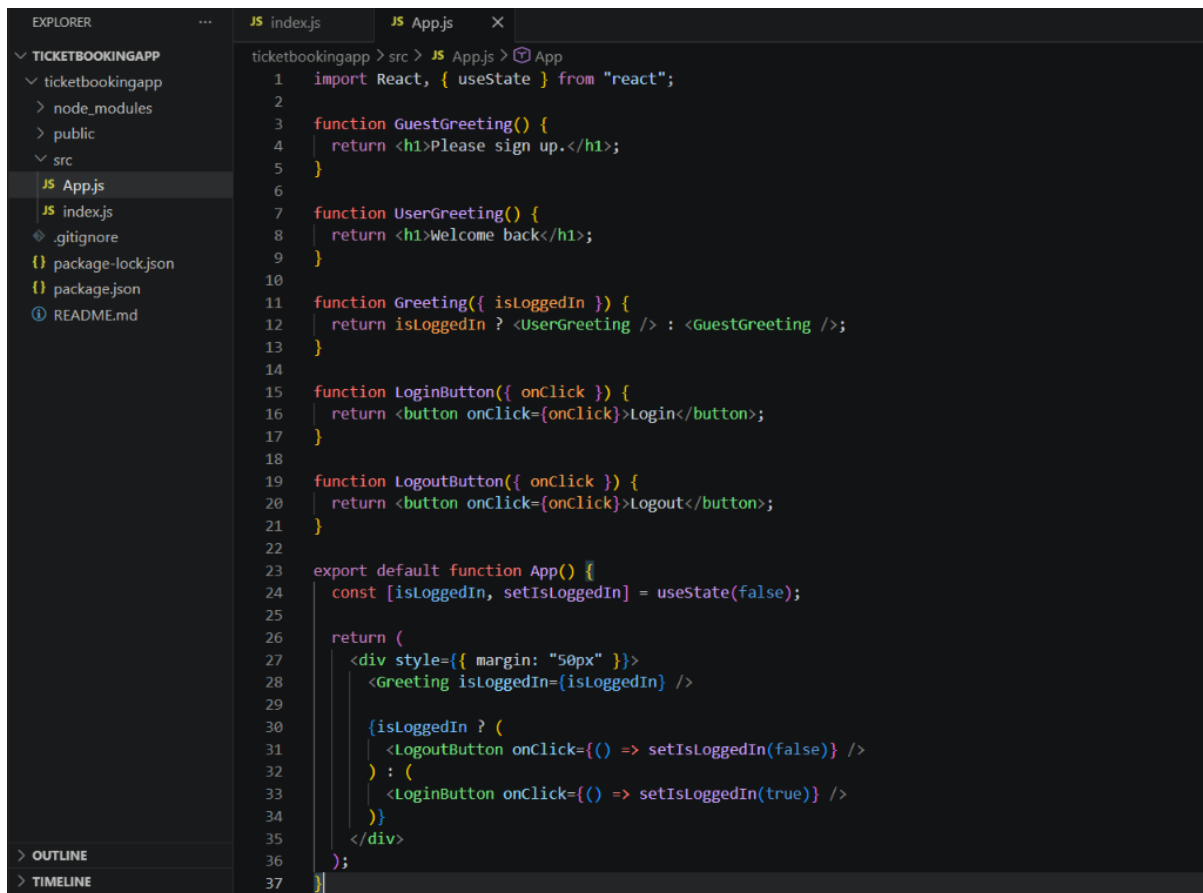

The screenshot shows the Visual Studio Code editor with the Explorer sidebar on the left. The project is named 'TICKETBOOKINGAPP'. The Explorer shows the file structure: 'ticketbookingapp' > 'src' > 'App.js'. The main editor displays the content of 'App.js'.

```
1  import React, { useState } from "react";
2
3  function GuestGreeting() {
4    return <h1>Please sign up.</h1>;
5  }
6
7  function UserGreeting() {
8    return <h1>Welcome back</h1>;
9  }
10
11 function Greeting({ isLoggedIn }) {
12   return isLoggedIn ? <UserGreeting /> : <GuestGreeting />;
13 }
14
15 function LoginButton({ onClick }) {
16   return <button onClick={onClick}>Login</button>;
17 }
18
19 function LogoutButton({ onClick }) {
20   return <button onClick={onClick}>Logout</button>;
21 }
22
23 export default function App() {
24   const [isLoggedIn, setIsLoggedIn] = useState(false);
25
26   return (
27     <div style={{ margin: "50px" }}>
28       <Greeting isLoggedIn={isLoggedIn} />
29       {isLoggedIn ? (
30         <LogoutButton onClick={() => setIsLoggedIn(false)} />
31       ) : (
32         <LoginButton onClick={() => setIsLoggedIn(true)} />
33       )}
34     </div>
35   );
36 }
37
```

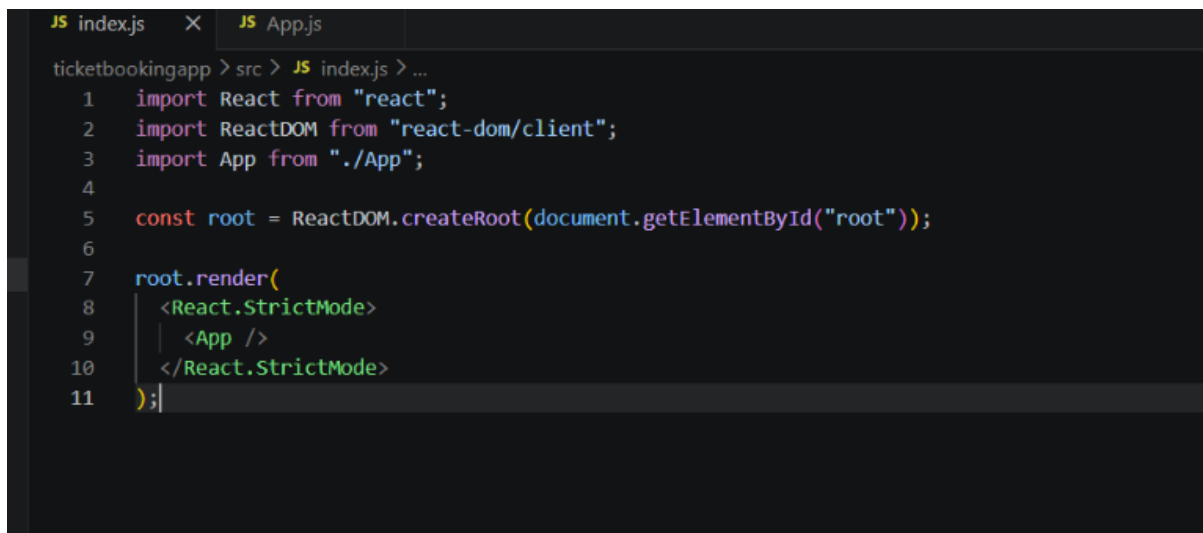

The screenshot shows the Visual Studio Code editor with the Explorer sidebar on the left. The project is named 'TICKETBOOKINGAPP'. The Explorer shows the file structure: 'ticketbookingapp' > 'src' > 'index.js'. The main editor displays the content of 'index.js'.

```
1  import React from "react";
2  import ReactDOM from "react-dom/client";
3  import App from "./App";
4
5  const root = ReactDOM.createRoot(document.getElementById("root"));
6
7  root.render(
8    <React.StrictMode>
9      <App />
10    </React.StrictMode>
11  );
```

Please sign up.

Login

Welcome back

Logout

13.ReactJS-HOL

```
JS BookDetails.js X JS BlogDetails.js JS CourseDetails.js JS App.js
bloggerapp > src > components > JS BookDetails.js > [🔍] default
1  function BookDetails() {
2      const books = [
3          { id: 101, bname: "Master React", price: 670 },
4          { id: 102, bname: "Deep Dive into Angular 11", price: 800 },
5          { id: 103, bname: "Mongo Essentials", price: 450 },
6      ];
7
8      return (
9          <div className="card">
10             <h1>Book Details</h1>
11
12             {books.map((book) => (
13                 <div key={book.id}>
14                     <h3>{book.bname}</h3>
15                     <h4>{book.price}</h4>
16                 </div>
17             ))}
18         </div>
19     );
20 }
21
22 export default BookDetails;
```

```
JS BookDetails.js JS BlogDetails.js X JS CourseDetails.js JS App.js
bloggerapp > src > components > JS BlogDetails.js > [🔍] default
1  function BlogDetails() {
2      const blogs = [
3          {
4              id: 1,
5              title: "React Learning",
6              author: "Stephen Biz",
7              desc: "Welcome to learning React!"
8          },
9          {
10             id: 2,
11             title: "Installation",
12             author: "Schwzen denier",
13             desc: "You can install React from npm."
14         }
15     ];
16
17     return (
18         <div className="card">
19             <h1>Blog Details</h1>
20
21             {blogs.map((blog) => (
22                 <div key={blog.id}>
23                     <h2>{blog.title}</h2>
24                     <h4>{blog.author}</h4>
25                     <p>{blog.desc}</p>
26                 </div>
27             ))}
28         </div>
29     );
30 }
31
32 export default BlogDetails;
```

```
JS BookDetails.js JS BlogDetails.js JS CourseDetails.js X JS App.js
bloggerapp > src > components > JS CourseDetails.js > [🔍] default
1  function CourseDetails() {
2      const courses = [
3          {
4              id: 1,
5              name: "Angular",
6              date: "4/5/2021",
7          },
8          {
9              id: 2,
10             name: "React",
11             date: "6/3/2020",
12         },
13     ];
14
15     return (
16         <div className="card">
17             <h1>Course Details</h1>
18
19             {courses.map((course) => (
20                 <div key={course.id}>
21                     <h2>{course.name}</h2>
22                     <h4>{course.date}</h4>
23                 </div>
24             ))}
25         </div>
26     );
27 }
28
29 export default CourseDetails;
```

```
Run Terminal Help <--> bloggerapp
$ BookDetails.js JS BlogDetails.js JS CourseDetails.js JS App.js X
bloggerapp > src > JS App.js > [🔍] default
1  import BookDetails from "./components/BookDetails";
2  import BlogDetails from "./components/BlogDetails";
3  import CourseDetails from "./components/CourseDetails";
4
5  function App() {
6      return (
7          <div className="container">
8              <CourseDetails />
9              <BookDetails />
10             <BlogDetails />
11          </div>
12      );
13  }
14
15  export default App;
```

Course Details

Angular

4/5/2021

React

6/3/2020

Book Details

Master React

670

Deep Dive into Angular 11

800

Mongo Essentials

450

Blog Details

React Learning

Stephen Biz

Welcome to learning React!

Installation

Schwzen denier

You can install React from npm.