

KEVIN INFANT P A - 241001116

Enumerating Targets:

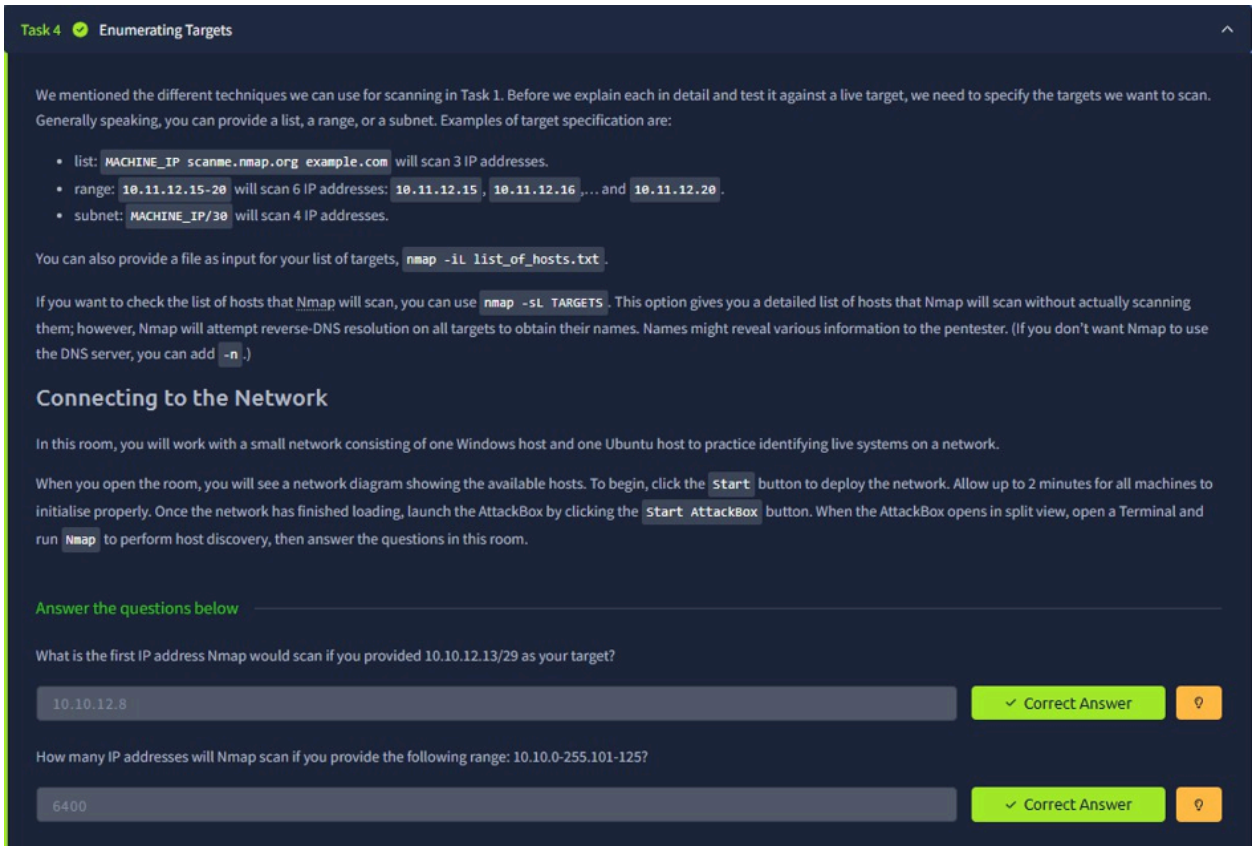


ARP SCAN:

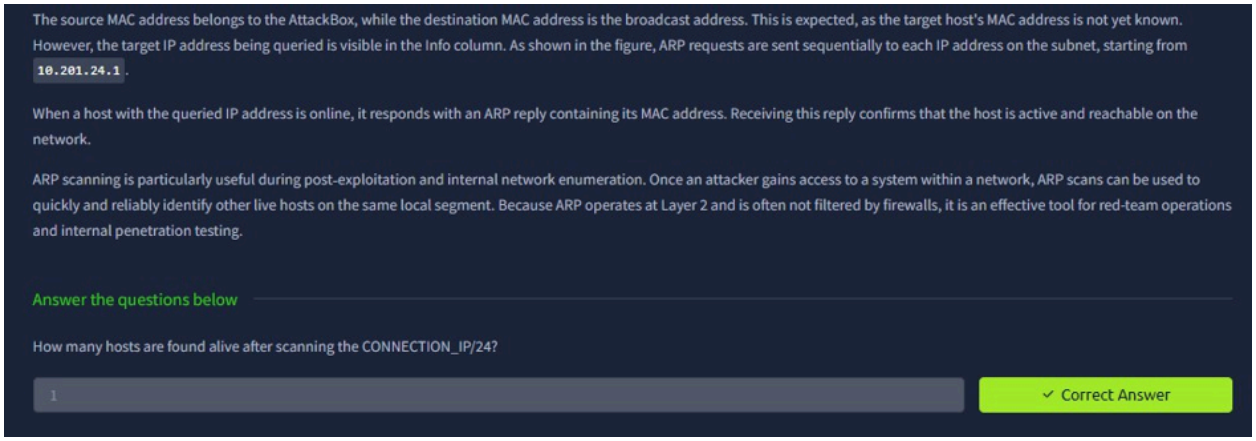

ICMP SCAN :

KEVIN INFANT P A - 241001116


Enumerating Targets:

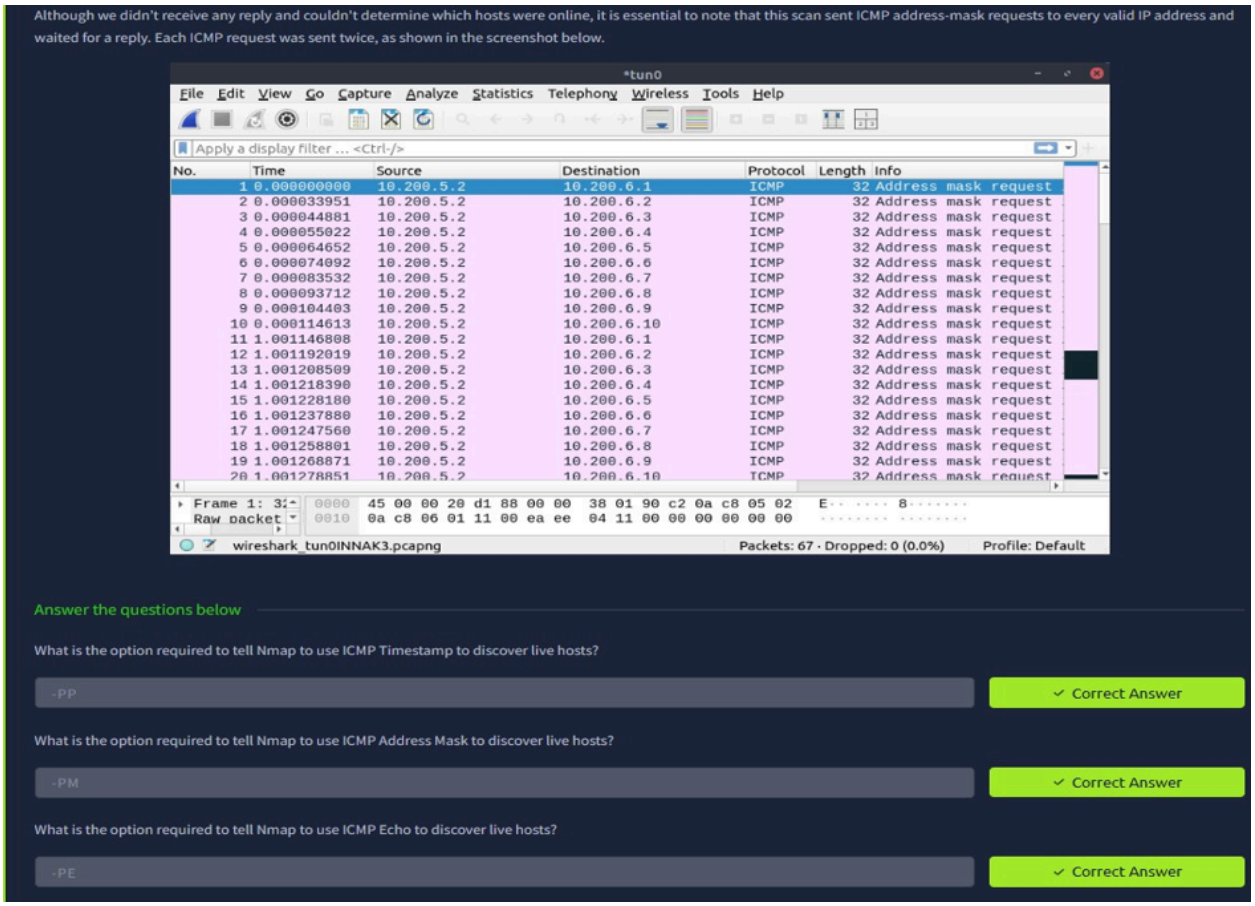

TCP AND UDP SCAN:

KEVIN INFANT P A - 241001116

Enumerating Targets:

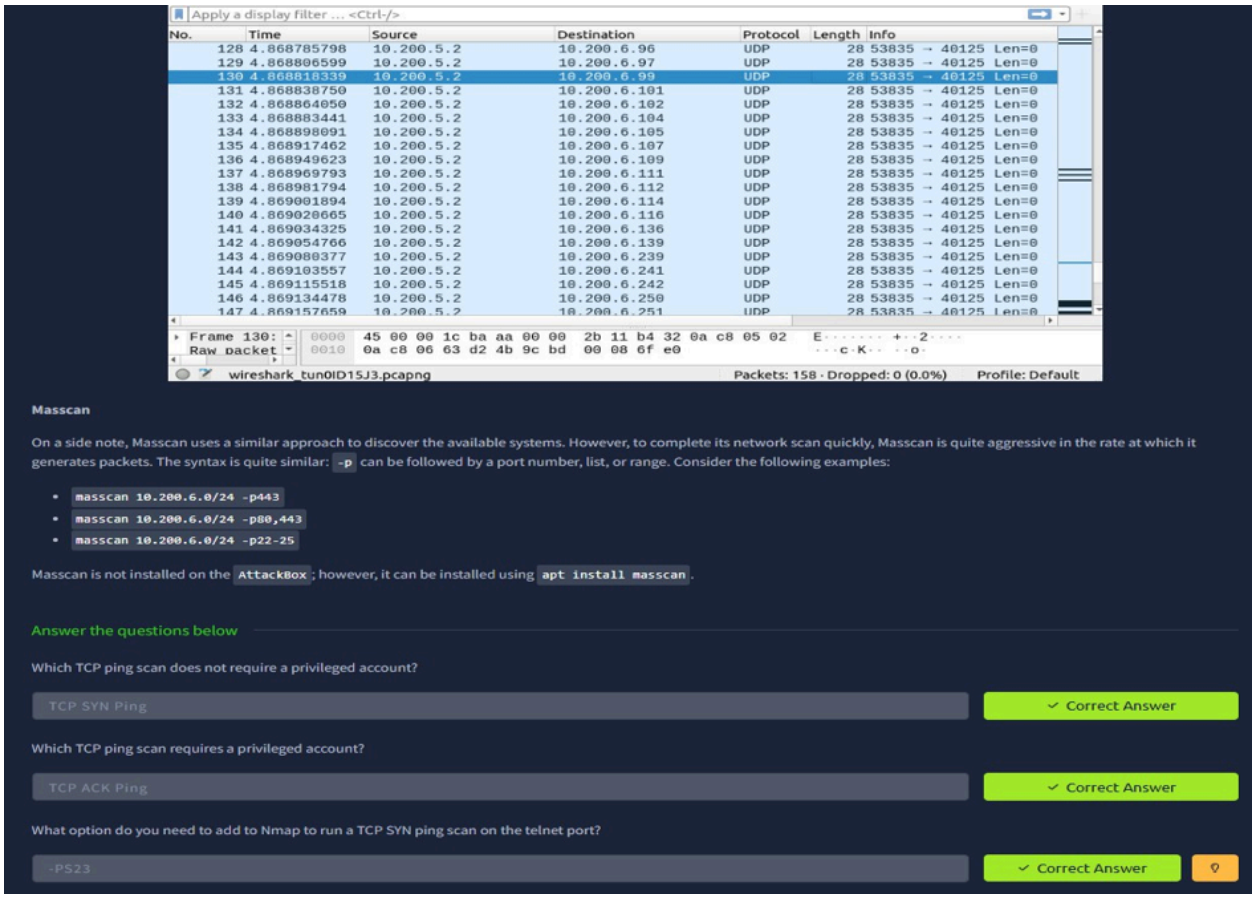

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
128	4.868785798	10.200.5.2	10.200.6.96	UDP	28	53835 → 40125 Len=0
129	4.868806599	10.200.5.2	10.200.6.97	UDP	28	53835 → 40125 Len=0
130	4.868818339	10.200.5.2	10.200.6.99	UDP	28	53835 → 40125 Len=0
131	4.868838750	10.200.5.2	10.200.6.101	UDP	28	53835 → 40125 Len=0
132	4.868864050	10.200.5.2	10.200.6.102	UDP	28	53835 → 40125 Len=0
133	4.868883441	10.200.5.2	10.200.6.104	UDP	28	53835 → 40125 Len=0
134	4.868898091	10.200.5.2	10.200.6.105	UDP	28	53835 → 40125 Len=0
135	4.868917462	10.200.5.2	10.200.6.107	UDP	28	53835 → 40125 Len=0
136	4.868949623	10.200.5.2	10.200.6.109	UDP	28	53835 → 40125 Len=0
137	4.868969793	10.200.5.2	10.200.6.111	UDP	28	53835 → 40125 Len=0
138	4.868981794	10.200.5.2	10.200.6.112	UDP	28	53835 → 40125 Len=0
139	4.869001894	10.200.5.2	10.200.6.114	UDP	28	53835 → 40125 Len=0
140	4.869020665	10.200.5.2	10.200.6.116	UDP	28	53835 → 40125 Len=0
141	4.869034325	10.200.5.2	10.200.6.136	UDP	28	53835 → 40125 Len=0
142	4.869054766	10.200.5.2	10.200.6.139	UDP	28	53835 → 40125 Len=0
143	4.869080377	10.200.5.2	10.200.6.239	UDP	28	53835 → 40125 Len=0
144	4.869103557	10.200.5.2	10.200.6.241	UDP	28	53835 → 40125 Len=0
145	4.869115518	10.200.5.2	10.200.6.242	UDP	28	53835 → 40125 Len=0
146	4.869134478	10.200.5.2	10.200.6.250	UDP	28	53835 → 40125 Len=0
147	4.869157659	10.200.5.2	10.200.6.251	UDP	28	53835 → 40125 Len=0

Frame 130: Raw packet

0000 45 00 00 1c ba aa 00 00 2b 11 b4 32 0a c8 05 02 E·····+··2····
0010 0a c8 06 63 d2 4b 9c bd 00 08 6f e0 ···c·K···o·

wireshark_tun0ID15J3.pcapng Packets: 158 · Dropped: 0 (0.0%) Profile: Default

Masscan

On a side note, Masscan uses a similar approach to discover the available systems. However, to complete its network scan quickly, Masscan is quite aggressive in the rate at which it generates packets. The syntax is quite similar: `-p` can be followed by a port number, list, or range. Consider the following examples:

- `masscan 10.200.6.0/24 -p443`
- `masscan 10.200.6.0/24 -p80,443`
- `masscan 10.200.6.0/24 -p22-25`

Masscan is not installed on the `AttackBox`; however, it can be installed using `apt install masscan`.

Answer the questions below

Which TCP ping scan does not require a privileged account?

TCP SYN Ping — ✓ Correct Answer

Which TCP ping scan requires a privileged account?

TCP ACK Ping — ✓ Correct Answer

What option do you need to add to Nmap to run a TCP SYN ping scan on the telnet port?

-PS23 — ✓ Correct Answer