


# JENKINS WITH DOCKERS

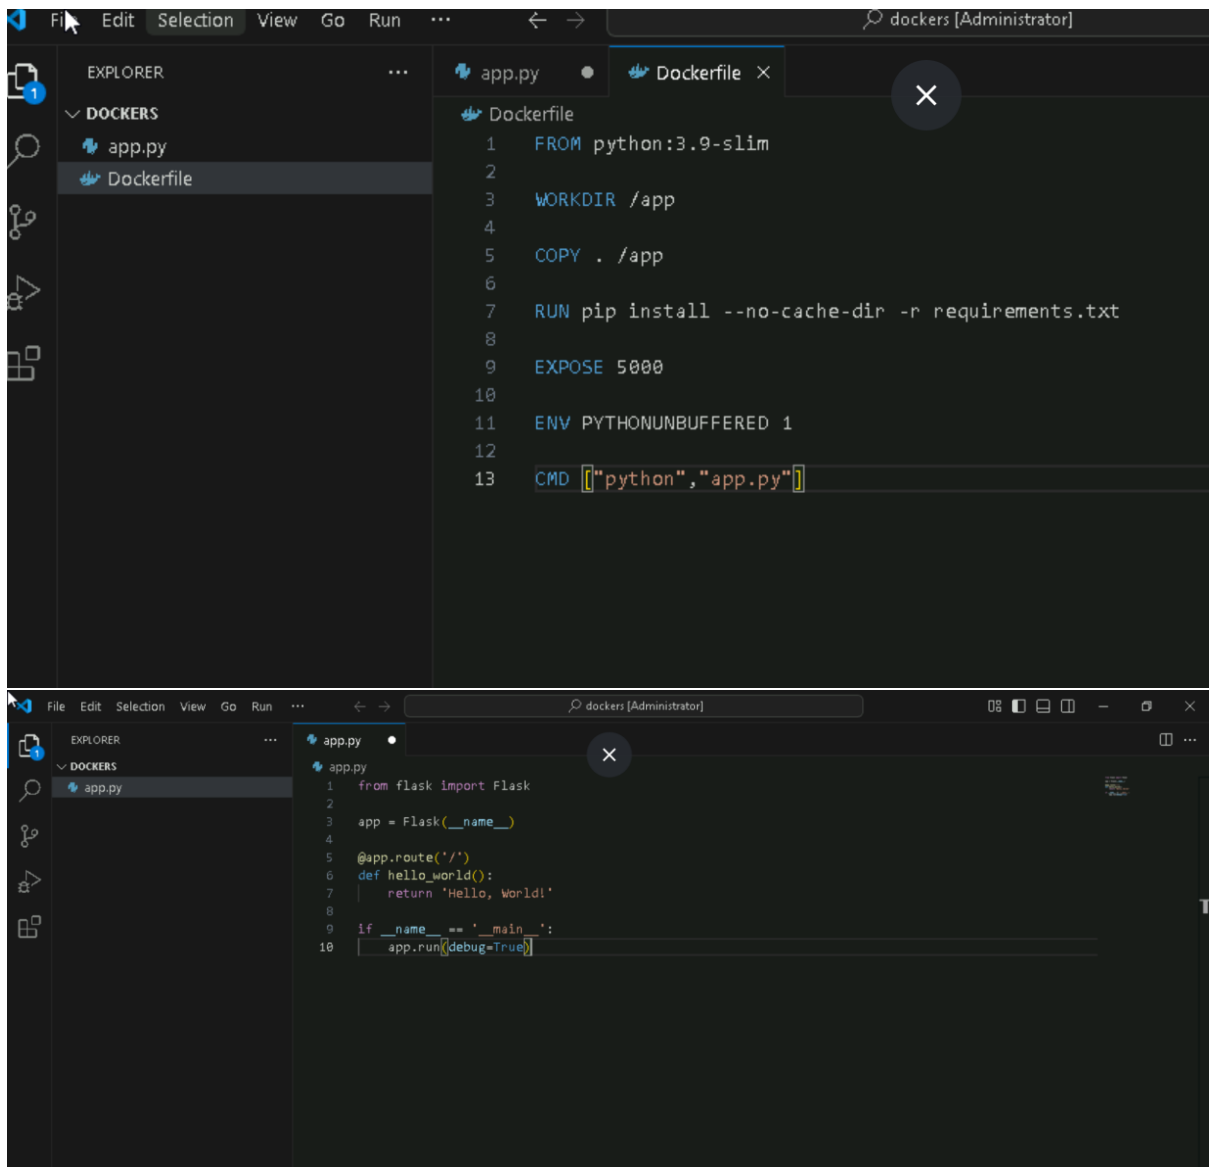

→ ↻ https://github.com/KIREETI1234/dockerwithjenkins/blob/main/Jenkinsfile

main dockerwithjenkins / Jenkinsfile ↑ Top

Code Blame 29 lines (25 loc) · 705 Bytes

Raw Download Edit

```
stages {
  stage('Clone Repository') {
    steps {
      git url:'https://github.com/KIREETI1234/dockerwithjenkins.git',branch: 'main'
    }
  }

  stage('Build Docker Image') {
    steps {
      sh 'docker build -t $DOCKER_IMAGE .'
    }
  }

  stage('Push Docker Image') {
    steps {
      withDockerRegistry(credentialsId: 'docker-hub-credentials', url: 'https://index.docker.io/v1/') {
        sh 'docker push $DOCKER_IMAGE'
      }
    }
  }
}
```

KIREETI1234/dockerwithjenkins dockerwithjenkins [Jenkins]

github.com/KIREETI1234/dockerwithjenkins

KIREETI1234 / dockerwithjenkins

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

dockerwithjenkins Public

Pin Unwatch 1 Fork 0 Star 0

main 1 Branch 0 Tags

Go to file t Add file <> Code

KIREETI1234 Second Commit 9e2c0b4 · now 3 Commits

Dockerfile	Initial commit	19 minutes ago
Jenkinsfile	Initial commit	19 minutes ago
README.md	Initial commit	now
app.py	Second Commit	now
requirements.txt	Second Commit	now

README

About

No description, website, or topics provided.

- Readme
- Activity
- 0 stars
- 1 watching
- 0 forks

Releases

No releases published





Create a new release

Activate Windows


Go to Settings to activate Windows.

Packages

## Credentials

T	P	Store	Domain	ID	Name
		System	(global)	jenkins-slave	root
		System	(global)	github-credentials	KIREETI1234/*****
		System	(global)	docker-hub-credentials	kireeti1234/*****

## Stores scoped to Jenkins

P	Store	Domains
	System	(global)

Workstation

jenkins-docker

Jenkins » Credentials

dockerwithjen

Docker not fou

Docker Hub Co

Personal acces

https://app.docker.com/settings/personal-access-tokens

Account information

Email

Password

2FA

Personal access tokens

Connected accounts

Convert

Deactivate

### Personal access tokens

You can use a personal access token instead of a password for Docker CLI authentication. Create multiple tokens, control their scope, and delete tokens at any time. [Learn more](#)

✓ Successfully updated personal access token.

Generate new token

Description	Scope	Status	Source	Created	Last used	Expiration date
jk-dk	Read, Write, Delete	Active	Manual	Mar 04, 2025 at 17:19:06	Never	Never
Generated through de...	Read, Write, Delete	Active	Auto-generated	Mar 04, 2025 at 14:47:15	Never	Never

Rows per page: 10 1-2 of 2

jenkins-dockers

jenkins-dockers

Dashboard > jenkins-dockers >

Status

Changes

Build Now

Configure

Delete Pipeline

Full Stage View

Favorite

Open Blue Ocean

Stages

Rename

Pipeline Syntax

jenkins-dockers

Add description

Stage View

Average stage times:  
(full run time: ~41s)

	Declarative: Checkout SCM	Clone Repository	Build Docker Image	Push Docker Image
17:21 No Changes	1s	1s	11s	24s
17:14 No Changes	1s	1s	12s	171ms failed
17:11 No Changes	1s	1s	32s	292ms failed

jenkins-dockers #6 Console

jenkins-dockers #6

```
10007f0c0d17: Pushed
a86bcfd35150: Pushed
4a0e2c276a6a: Mounted from library/python
5f1ee22ffb5e: Mounted from library/python
5b235fdc7244: Pushed
latest: digest: sha256:f2a8f7877d6aae69b4c700f7e9c42794840190819c7a3be0dce8ba5992456cbc size:
1785
[Pipeline] }
[Pipeline] // withDockerRegistry
[Pipeline] }
[Pipeline] // stage
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // withEnv
[Pipeline] }
[Pipeline] // node
[Pipeline] End of Pipeline
Finished: SUCCESS
```

REST API Jenkins 2.492.1

