


Step-1: Clone a project from GitHub in a terminal from visual studio code using git clone “link”.

Step-2: Go to the folder where we extracted the zip file and open the git bash from that location.

Step-3: Before that create a repository in GitHub naming portfolio and include readme file.

Step-4: Initialize the git using git Init command.

Step-5: Connect the remote repo on GitHub to the git by using the command git remote add origin “link”. (Link is available in GitHub under code button)

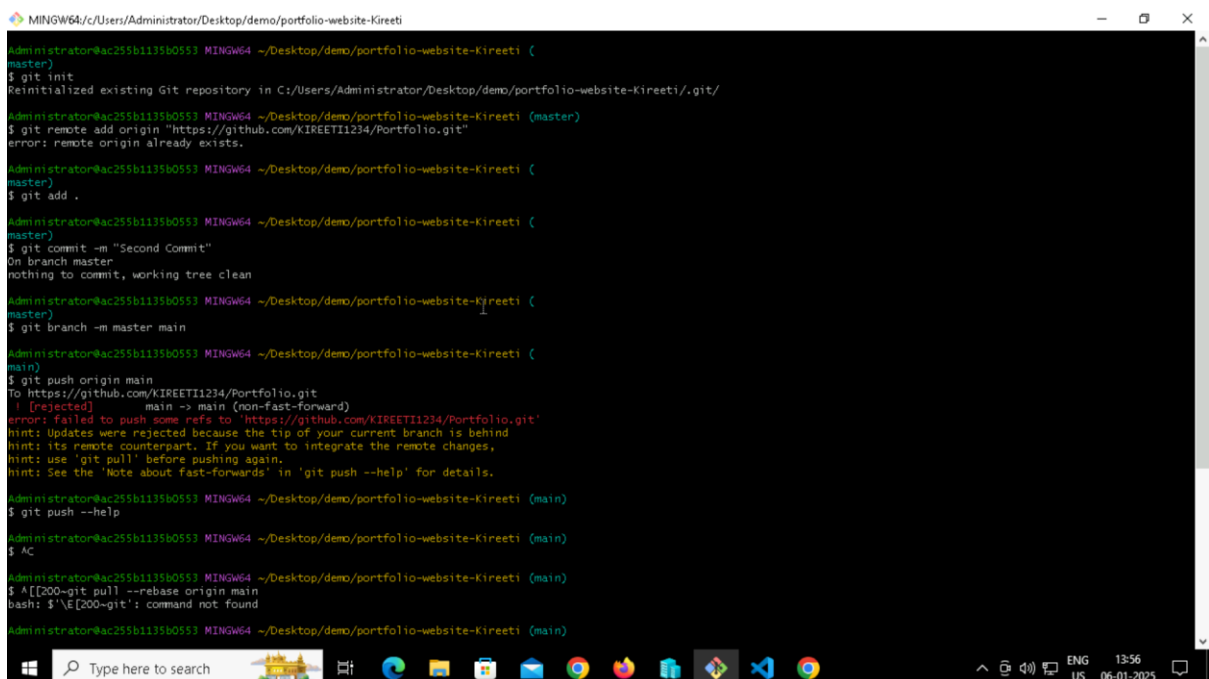

```
Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (
master)
$ git init
Reinitialized existing Git repository in C:/Users/Administrator/Desktop/demo/portfolio-website-Kireeti/.git/

Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (master)
$ git remote add origin "https://github.com/KIREETI1234/Portfolio.git"
error: remote origin already exists.

Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (
master)
$ git add .

Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (
master)
$ git commit -m "Second Commit"
On branch master
nothing to commit, working tree clean

Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (
master)
$ git branch -m master main

Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (
main)
$ git push origin main
To https://github.com/KIREETI1234/Portfolio.git
 ! [rejected]        main -> main (non-fast-forward)
error: failed to push some refs to 'https://github.com/KIREETI1234/Portfolio.git'
hint: Updates were rejected because the tip of your current branch is behind
hint: its remote counterpart. If you want to integrate the remote changes,
hint: use 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.

Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ git push --help
Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ AC
Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ A[[200-git pull --rebase origin main
bash: $'\E[200-git': command not found

Administrator@ac255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
```

Step-6: Use git pull origin main command to pull the files (like readme) from the remote repo to local repo.

Step-7: Add the files that are present in the folder(index.html,style.css and script.js) into the staging area by using git add .


Step-8: To know the status of the files that are added to staging area type the git status command.

Step-9: Commit the changes by using git commit -m “Some description here”.



Step-10: Change the name of master branch to main by using the command “git branch -m master main”.

Step-11: Now push the files that are committed (saved) previously by using git push origin main. Check whether the files have come to GitHub if any error occurs follow the previous steps.

```
MINGW64/c/Users/Administrator/Desktop/demo/portfolio-website-Kireeti
nothing to commit, working tree clean
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (
master)
$ git branch -m master main
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (
main)
$ git push origin main
To https://github.com/KIREETI1234/Portfolio.git
 ! [rejected]        main -> main (non-fast-forward)
error: failed to push some refs to 'https://github.com/KIREETI1234/Portfolio.git'
hint: updates were rejected because the tip of your current branch is behind
hint: its remote counterpart. If you want to integrate the remote changes,
hint: use 'git pull' before pushing again.
hint: See the 'Note about fast-forwards' in 'git push --help' for details.
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ git push --help
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ AC
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ *[[200-git pull --rebase origin main
bash: '$*[[200-git': command not found
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ git pull --rebase origin main
From https://github.com/KIREETI1234/Portfolio
* branch:      main -> FETCH_HEAD
Successfully rebased and updated refs/heads/main.
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$ git push origin main
Enumerating objects: 29, done.
Counting objects: 100% (29/29), done.
Delta compression using up to 4 threads
Compressing objects: 100% (26/26), done.
Writing objects: 100% (28/28), 691.68 KiB | 11.72 MiB/s, done.
Total 28 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To https://github.com/KIREETI1234/Portfolio.git
45e5ada..90ef1eb main -> main
Administrator@AC255b1135b0553 MINGW64 ~/Desktop/demo/portfolio-website-Kireeti (main)
$
```

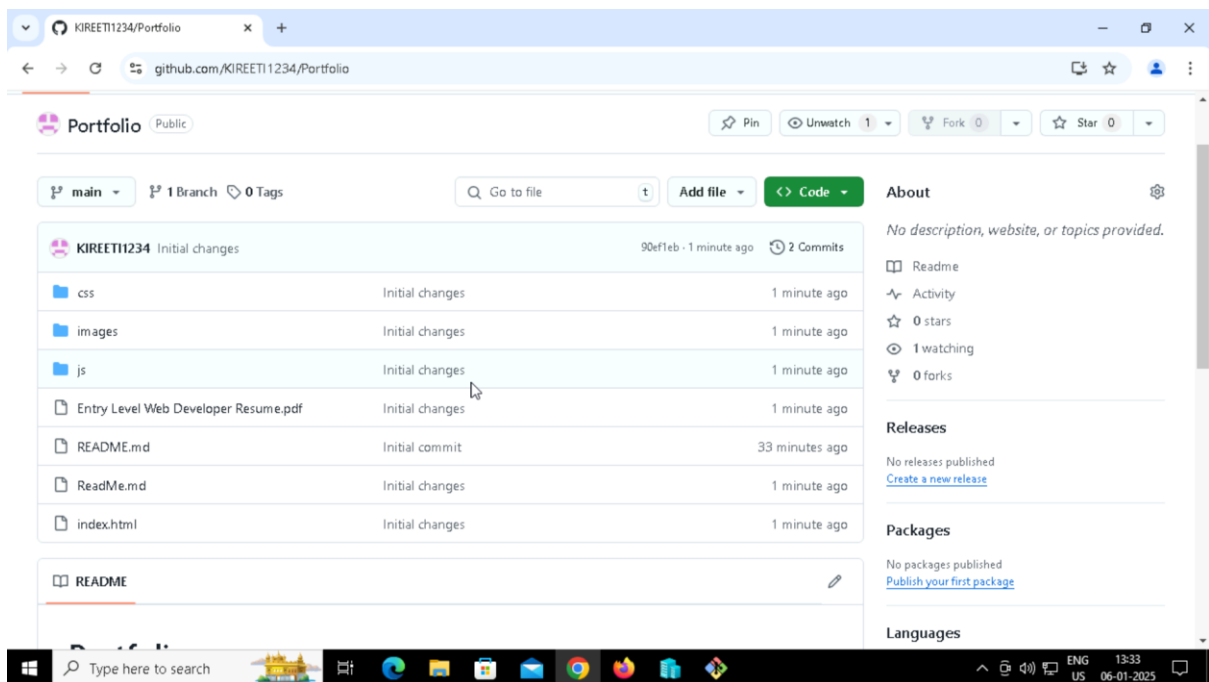

Step-12: Go to settings -> pages and select the main branch and click save to deploy and after the completion of deployment click on the link provided by GitHub.

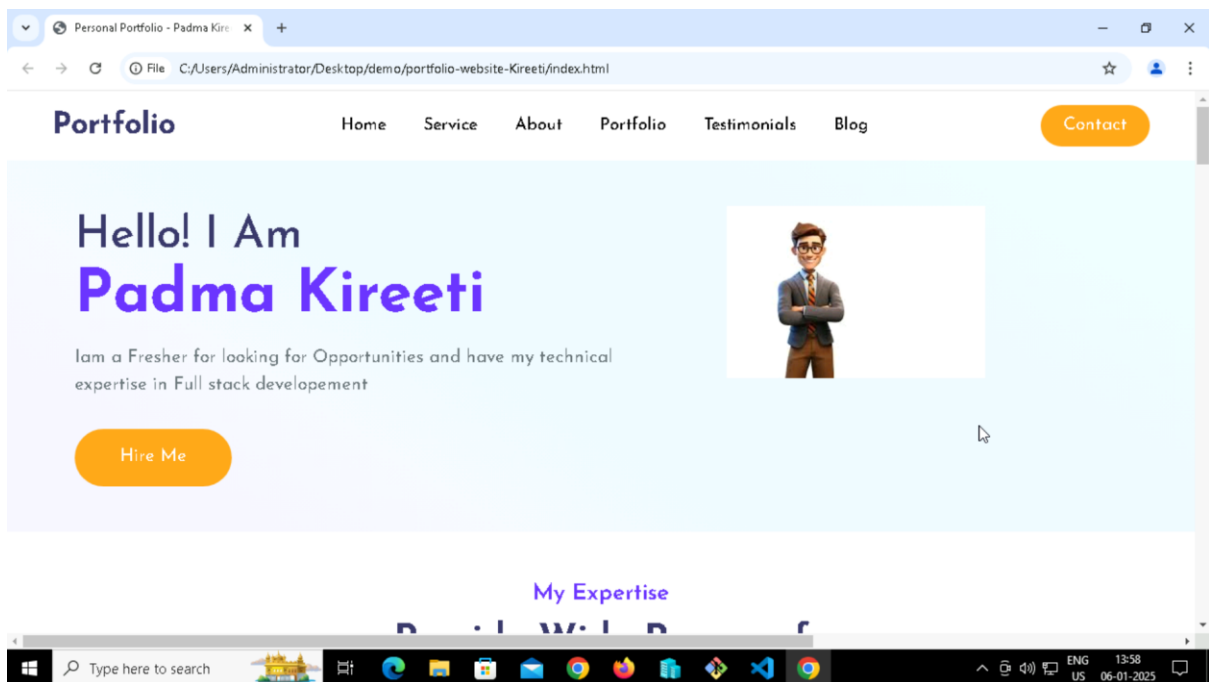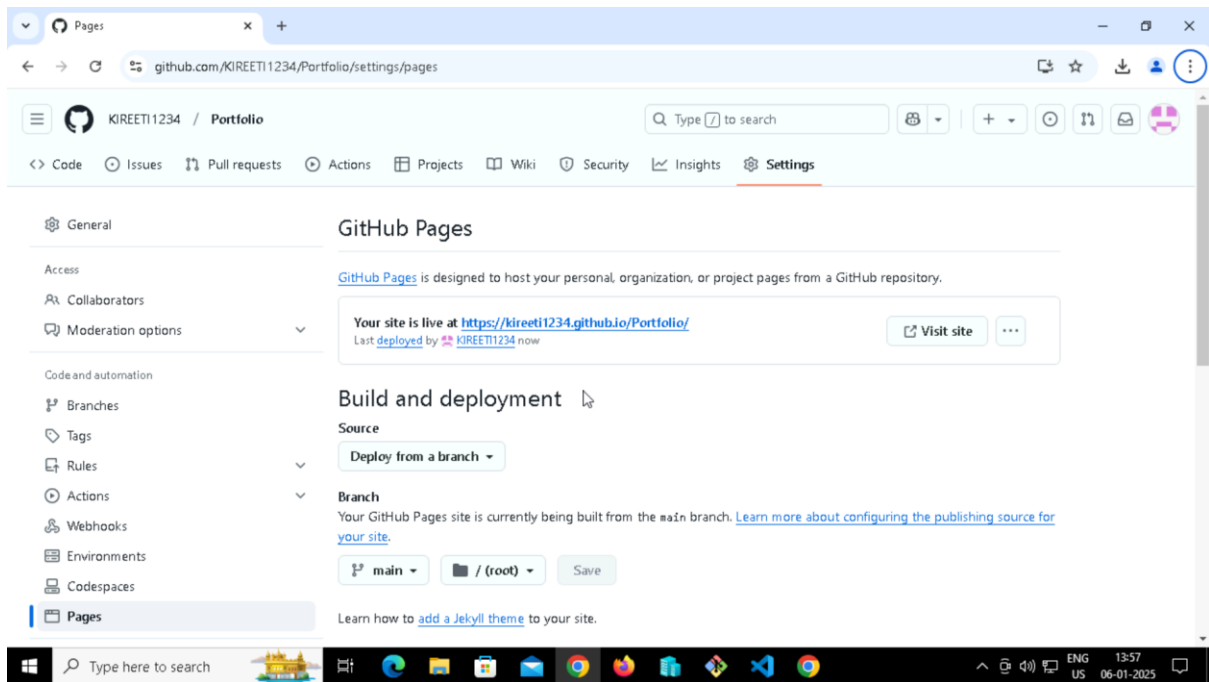

INDEX.HTML

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8" />
```

```
<meta http-equiv="X-UA-Compatible" content="IE=edge" />
```

```
<meta name="viewport" content="width=device-width, initial-scale=1.0" />
```

<title>Personal Portfolio - Padma Kireeti</title>

<!-- bootstrap css cdn link -->

<link

href="https://cdn.jsdelivr.net/npm/bootstrap@5.2.3/dist/css/bootstrap.min.css"

rel="stylesheet"

integrity="sha384-

rsA2VBKQhggwzxH7pPCaAqO46MgnOM80zW1RWuH61DGLwZJEdK2Kadq2F9CUG65"

crossorigin="anonymous"

/>

<!-- custom css file -->

<link rel="stylesheet" href="css/style.css" />

<!-- google font link -->

<link rel="preconnect" href="https://fonts.googleapis.com" />

<link rel="preconnect" href="https://fonts.gstatic.com" crossorigin />

<link

href="https://fonts.googleapis.com/css2?family=Josefin+Sans:wght@300;400;500;600;700&display=swap"

rel="stylesheet"

/>

<!-- bootstrap icon cdn link -->

<link

rel="stylesheet"

href="https://cdn.jsdelivr.net/npm/bootstrap-icons@1.10.4/font/bootstrap-icons.css"

/>

<!-- for adding animation to website we have use AOS library

AOS Library css file cdn link -->

```
<link rel="stylesheet" href="https://unpkg.com/aos@next/dist/aos.css" />
```

<!-- jquery cdn link -->

```
<script src="https://ajax.googleapis.com/ajax/libs/jquery/3.6.4/jquery.min.js"></script>
```

```
</head>
```

```
<body>
```

<!-- navbar starts -->

```
<nav
```

```
  id="navbar-top"
```

```
  class="navbar navbar-expand-lg navbar-light bg-white sticky-top"
```

```
>
```

```
<div class="container-fluid px-5">
```

```
<a class="navbar-brand fw-bold fs-2" href="#" style="color: #3f396d"
```

```
>Portfolio</a
```

```
>
```

```
<button
```

```
  class="nav-menu d-md-none"
```

```
  type="button"
```

```
  data-bs-toggle="collapse"
```

```
  data-bs-target="#navbarNav"
```

```
>
```

```
<i class="bi bi-menu-button-fill"></i>
```

```
</button>
```

```
<div
```

```
  class="collapse navbar-collapse justify-content-center"
```

```
  id="navbarNav"
```

```
>
```

```
<ul class="navbar-nav gap-4" style="font-size: 1.1rem">
```

```
<li class="nav-item">
```

```
        <a class="nav-link" aria-current="page" href="#">Home</a>
    </li>

    <li class="nav-item">

        <a class="nav-link" href="#service">Service</a>
    </li>

    <li class="nav-item">

        <a class="nav-link" href="#about">About</a>
    </li>

    <li class="nav-item">

        <a class="nav-link" href="#portfolio">Portfolio</a>
    </li>

    <li class="nav-item">

        <a class="nav-link" href="#testimonial">Testimonials</a>
    </li>

    <li class="nav-item">

        <a class="nav-link" href="#blog">Blog</a>
    </li>
</ul>
</div>

<button class="c-btn ms-4 py-2 px-4 rounded-pill d-none d-md-
block">Contact</button>
</div>
</nav>

<!-- navbar ends here -->

<!-- home section starts -->

<section class="home pt-5 pb-5" id="home">

    <div class="row justify-content-evenly align-middle">

        <!-- here data-aos is used for adding aos animation -->

        <div class="col-10 col-md-6 text-center text-md-start" data-aos="slide-right">

            <h2 style="color: #3f396d">
```

```
    Hello! I Am <br /><span class="c-orange">Padma Kireeti</span>
  </h2>

  <p class="text-muted">
    I'm A Web Developer having 5 years of experience in expertise of
    creating website with fully responsive Also with backend part too.
  </p>

  <button class="c-btn h-btn mt-3 py-3 px-5 rounded-pill">
    Hire Me
  </button>

  <a href="" class="link ms-4 d-none">See My Work</a>
</div>

<div class="col-10 col-md-4 d-none d-md-block">
  
</div>
</div>
</section>

<!-- home section ends here -->

<!-- expertise section starts -->
<section class="expertise mt-5" id="service">
  <div class="heading text-center">
    <small>My Expertise</small>
    <h3>
      Provide Wide Range of <br />
      Digital Services
    </h3>
  </div>

  <div class="row justify-content-evenly mt-5">
    <div class="col-10 col-md-4" data-aos="fade-up">
      <div class="service-card">
```

```
<div class="img">
```

```

```

```
<div class="content mt-3">
```

```
<h4>Web Design</h4>
```

```
<p class="text-muted">
```

```
  Dolor repellendus temporibus autem quibusdam officiis debitis
```

```
  rerum necesse aibus minima veniam.
```

```
</p>
```

```
<a href="" class="link">Read More</a>
```

```
</div>
```

```
</div>
```

```
</div>
```

```
<div class="col-md-4 col-10" data-aos="fade-up">
```

```
<div class="service-card">
```

```
<div class="img">
```

```

```

```
<div class="content mt-3">
```

```
<h4>Web Development</h4>
```

```
<p class="text-muted">
```

```
  Dolor repellendus temporibus autem quibusdam officiis debitis
```


rerum neces aibus minima veniam.

</p>

Read More

</div>

</div>

</div>

<div class="col-md-4 col-10" data-aos="fade-up">

<div class="service-card">

<div class="img">

</div>

<div class="content mt-3">

<h4>Debugging</h4>

<p class="text-muted">

Dolor repellendus temporibus autem quibusdam officiis debitis

rerum neces aibus minima veniam.

</p>

Read More

</div>

</div>

</div>

</div>

</section>

<!-- expertise section ends here -->

STYLE.CSS

```
/* applying google font over the website */
body{
    font-family: 'Josefin Sans', sans-serif;
    font-weight: 400;
}
/* styling menu icon */
.nav-menu{
    border: none;
    background-color: #fff;
    font-size: 1.5rem;
    color: #fca61f;
}
/* styling navbar links */
.navbar-nav a{
    color: black;
    position: relative;
}
.navbar-nav a:hover{
    color: #fca61f;
}
.navbar-nav a:after {
    background: none repeat scroll 0 0 transparent;
    bottom: 0;
    content: "";
    display: block;
    height: 2px;
    left: 50%;
    top: 35px;
    position: absolute;
```

```
background: #fca61f;

transition: width 0.3s ease 0s, left 0.3s ease 0s;

width: 0;
}

.navbar-nav a:hover:after {
    width: 100%;
    left: 0;
}

/* styling contact btn */
.c-btn{
    border: none;
    background: #fca61f;
    color: #fff;
    font-size: 1.2rem;
}

/* styling home section starts */
.home{
    background: linear-gradient(33deg, rgba(242,242,255,1) 0%, rgba(235,249,255,1) 100%);
    padding: 30px 0px 10px 0px;
}

.home h2{
    font-size: 3rem;
    line-height: 4rem;
}

.c-orange{
    color: #6f34fe;
    font-weight: 700;
    font-size: 4rem;
}

.home p{
```

```
width: fit-content;
margin-top: 1rem;
font-size: 1.2rem;
}
.h-btn:hover{
background: #6f34fe;
color: #fff;
transform: translateY(-20px);
transition-duration: 1s;
}
.link{
text-decoration: none;
font-size: 1.2rem;
color: #fca61f;
position: relative;
}
.link::after{
content: "";
position: absolute;
width: 100%;
transform: scaleX(0);
height: 2px;
bottom: 0;
left: 0;
top: 20px;
background-color: #6f34fe;
transform-origin: bottom right;
transition: transform 0.25s ease-out;
}
.link:hover{
```

```
    color: #6f34fe;
}
.link:hover::after{
    transform: scaleX(1);
    transform-origin: bottom left;
}
```

SCRIPT.JS

```
let htmlProgress = document.querySelector(".html-css"),
    htmlValue = document.querySelector(".html-progress");

let htmlStartValue = 0,
    htmlEndValue = 90,
    htmlspeed = 30;

let progresshtml = setInterval(() => {
    htmlStartValue++;

    htmlValue.textContent = `${htmlStartValue}%`;
    htmlProgress.style.background = `conic-gradient(#fca61f ${
        htmlStartValue * 3.6
    }deg, #ededed 0deg)`;

    if (htmlStartValue == htmlEndValue) {
        clearInterval(progresshtml);
    }
}, htmlspeed);

// javascript progress circular bar
let javascriptProgress = document.querySelector(".javascript"),
    javascriptValue = document.querySelector(".javascript-progress");
```

```
let javascriptStartValue = 0,  
    javascriptEndValue = 75,  
    jsspeed = 30;
```

```
let progressjs = setInterval(() => {  
    javascriptStartValue++;
```

```
    javascriptValue.textContent = `${javascriptStartValue}%`;  
    javascriptProgress.style.background = `conic-gradient(#7d2ae8 ${  
        javascriptStartValue * 3.6  
    }deg, #ededed 0deg)`;
```

```
    if (javascriptStartValue == javascriptEndValue) {  
        clearInterval(progressjs);  
    }  
}, jsspeed);
```

```
// php progress circular bar
```

```
let phpProgress = document.querySelector(".php"),  
    phpValue = document.querySelector(".php-progress");
```

```
let phpStartValue = 0,  
    phpEndValue = 80,  
    phpspeed = 30;
```

```
let progressphp = setInterval(() => {  
    phpStartValue++;
```

```
    phpValue.textContent = `${phpStartValue}%`;
```

```

phpProgress.style.background = `conic-gradient(#20c997 ${
  phpStartValue * 3.6
}deg, #ededed 0deg)`;

if (phpStartValue == phpEndValue) {
  clearInterval(progressphp);
}
}, phpspeed);

// reactjs progress circular bar
let reactProgress = document.querySelector(".reactjs"),
    reactValue = document.querySelector(".reactjs-progress");

let reactStartValue = 0,
    reactEndValue = 30,
    rjsspeed = 30;

let progressreact = setInterval(() => {
  reactStartValue++;

  reactValue.textContent = `${reactStartValue}%`;
  reactProgress.style.background = `conic-gradient(#3f396d ${
    reactStartValue * 3.6
  }deg, #ededed 0deg)`;

  if (reactStartValue == reactEndValue) {
    clearInterval(progressreact);
  }
}, rjsspeed);

```

```
// filter using javascript
$(document).ready(function () {
  $(".filter-item").click(function () {
    const value = $(this).attr("data-filter");
    if (value == "all") {
      $(".post").show("1000");
    } else {
      $(".post")
        .not("." + value)
        .hide("1000");
      $(".post")
        .filter("." + value)
        .show("1000");
    }
  });
});
```

```
// javascript for sticky navbar even if u scroll the navbar will be fixed
document.addEventListener("DOMContentLoaded", function(){
  window.addEventListener('scroll', function() {
    if (window.scrollY > 50) {
      document.getElementById('navbar-top').classList.add('fixed-top');
      // add padding top to show content behind navbar
      navbar_height = document.querySelector('.navbar').offsetHeight;
      document.body.style.paddingTop = navbar_height + 'px';
    } else {
      document.getElementById('navbar-top').classList.remove('fixed-top');
      // remove padding top from body
    }
  });
});
```



```
        document.body.style.paddingTop = '0';
    }
});
});
```

```
// adding functionality to back to top button
```

```
//Get the button
```

```
let mybutton = document.getElementById("btn-back-to-top");
```

```
// When the user scrolls down 20px from the top of the document, show the button
```

```
window.onscroll = function () {
    scrollFunction();
};
function scrollFunction() {
    if (
        document.body.scrollTop > 20 ||
        document.documentElement.scrollTop > 20
    ) {
        mybutton.style.display = "block";
    } else {
        mybutton.style.display = "none";
    }
}
```

```
// When the user clicks on the button, scroll to the top of the document
```

```
mybutton.addEventListener("click",function(){
    document.body.scrollTop = 0;
    document.documentElement.scrollTop = 0;
});
```

