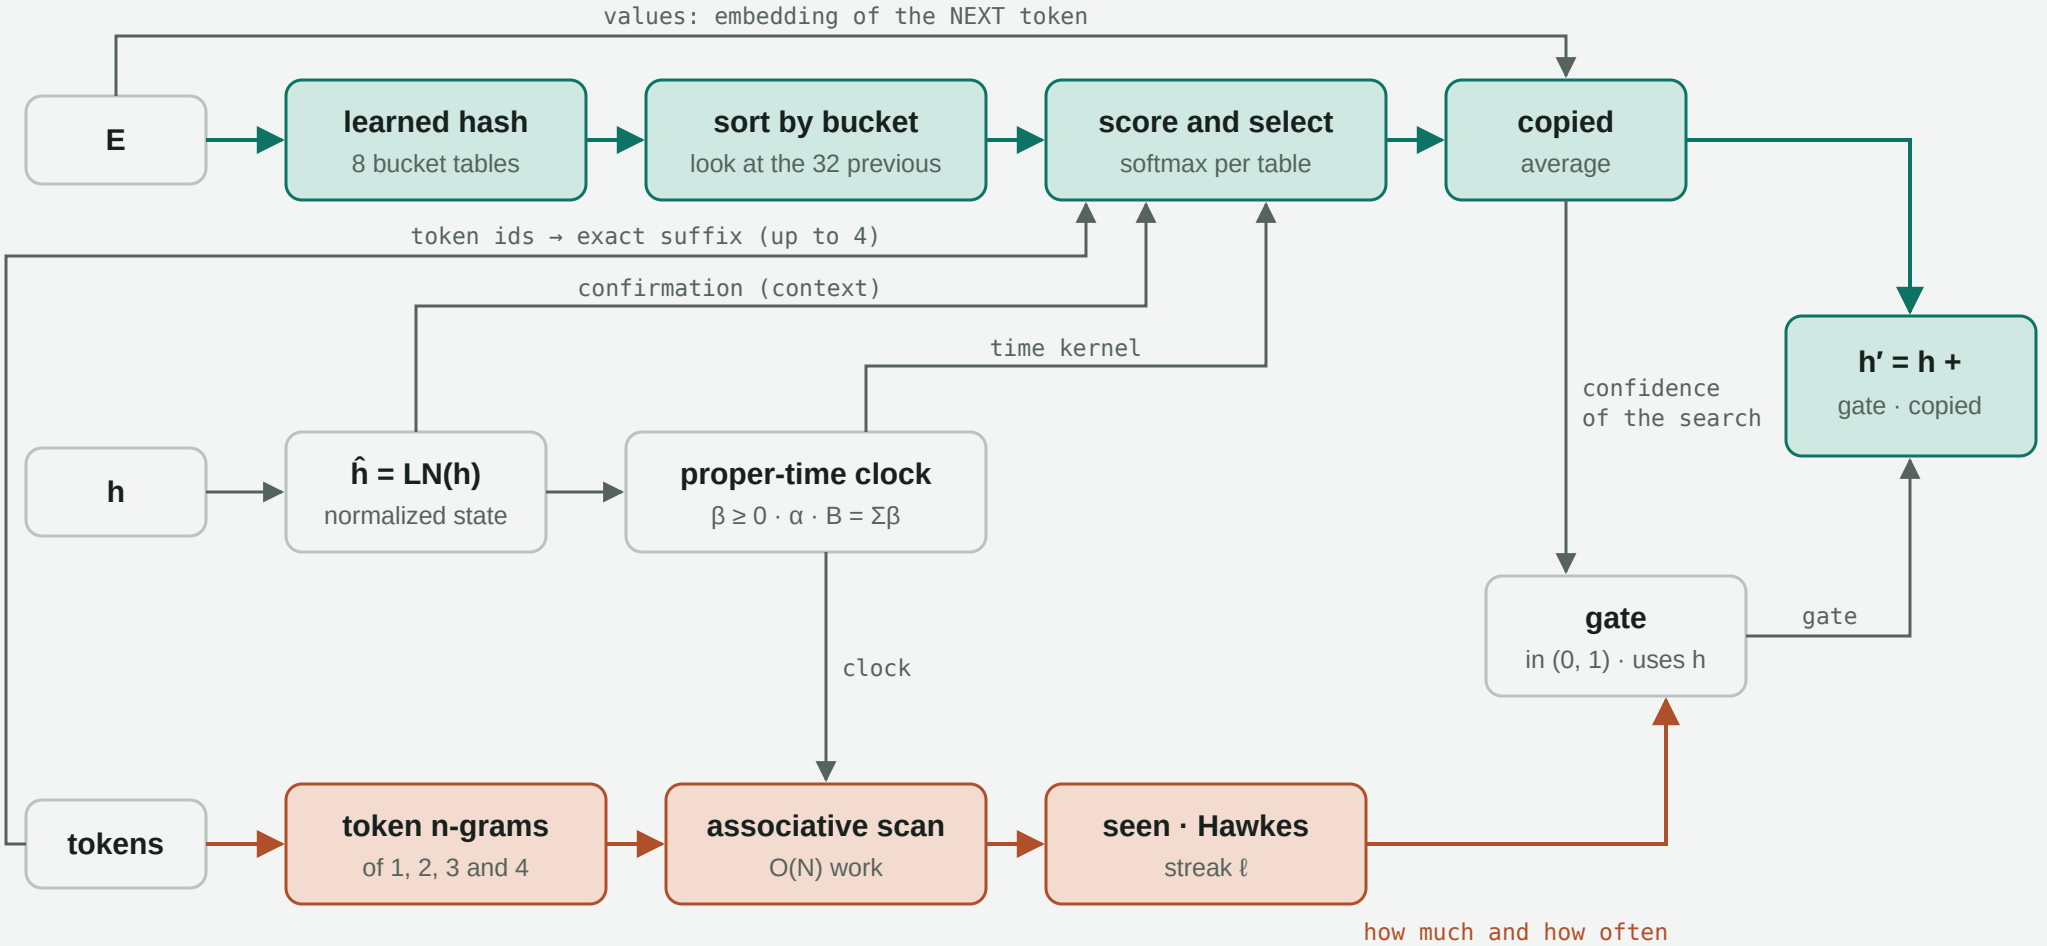
values: embedding of the NEXT token
E
learned hash
8 bucket tables
sort by bucket
look at the 32 previous
score and select
softmax per table
copied
average
token ids → exact suffix (up to 4)
confirmation (context)
time kernel
confidence
of the search
h′ = h +
gate · copied
h
ĥ = LN(h)
normalized state
proper-time clock
β ≥ 0 · α · B = Σβ
gate
in (0, 1) · uses h
gate
clock
tokens
token n-grams
of 1, 2, 3 and 4
associative scan
O(N) work
seen · Hawkes
streak ℓ
how much and how often