

# KKsymbols Package Documentation

Kosei Kawaguchi a.k.a. KKT<sub>EX</sub>

Version 2.0.0a (2025/12/31)

目次

1    Outline ..... 3

2    Acknowledgements / Credit ..... 4

3    Installation ..... 4

4    Caution ..... 4

5    Commands ..... 4

    5.1    The maru series ..... 4

6    Rotation ..... 6

    6.1    Commands ..... 6

    6.2    Vertical mode ..... 7

7    The seihou series ..... 7

8    The kakko series ..... 8

9    License ..... 9

10   Version History ..... 9

11   Source Code ..... 9

# 1 Outline


Japanese: このパッケージは、既存の otf フォントに頼ることなく、「任意のフォント、任意の引数で」丸数字などの特殊記号を再現する目的で作成されています。


luatexja-otf における `\ajMaru` などは、その設計上いたしかなないデメリットとして、早見表がないと使い物にならないというものがありません。しかし、本パッケージでは、一から特殊文字を設計し直すという取り組みを行なっているため、そのようなデメリットが解消されています。

English: This package is designed to reproduce special characters, such as circled numbers, using arbitrary fonts and parameters without relying on existing otf font sets.

A known disadvantage of commands like `\ajMaru` in `luatexja-otf` is that they are practically unusable without a reference chart. In contrast, this package addresses this issue by re-engineering special characters from the ground up, eliminating the need for complex lookup tables.

あ あ (あ) あ あ

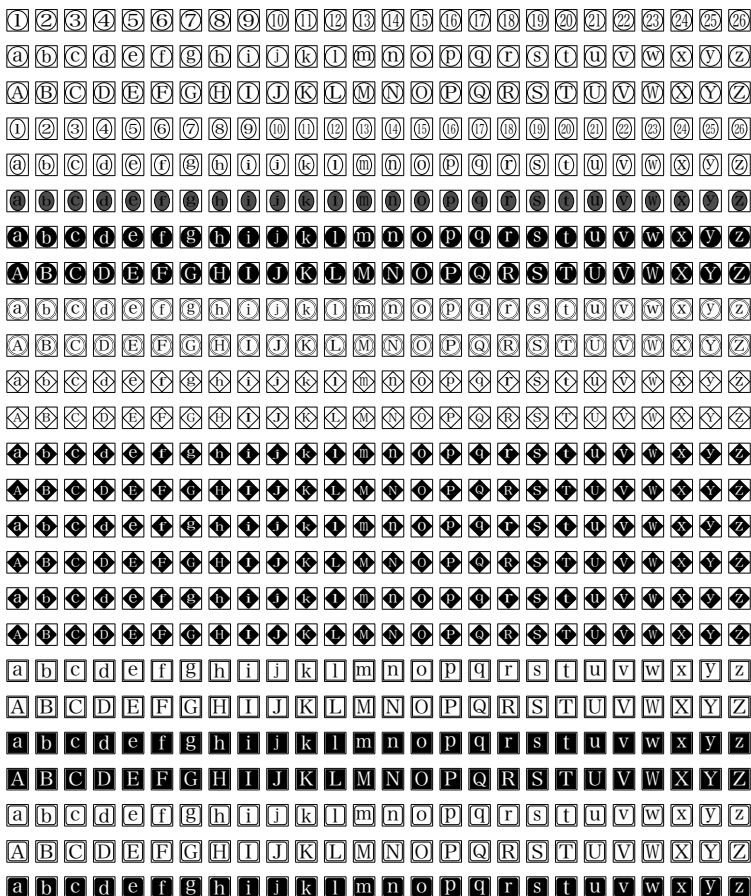



## 2 Acknowledgements / Credit

In developing this package, I made extensive use of the advice I received from Mr. Yusuke Terada.

I recommend you to refer to his article when you develop new-type symbols on  $\LaTeX$ .

<https://doratex.hatenablog.jp/entry/20211205/1638697391>

## 3 Installation

Place `KKsymbols.sty` in a directory where  $\LaTeX$  can find it, e.g., your local `texmf` tree or alongside your document.

Dependencies:

- `LuaLaTeX-jā`
- `tikz`
- `clac`

Load the package:

```
\usepackage{KKsymbols}
```

## 4 Caution

Since this package internally calls `\tjghostbeforejachar` and `\tjghostafterjachar`, it can be used only in a  $\text{LuaLaTeX}$  environment.

## 5 Commands

### 5.1 The maru series

This package provides `\maru`, `\kuromaru`, and `\nmaru`. Each of them takes one mandatory argument and no optional arguments. You can pass strings of any length and in any font as arguments.

In most cases, `\maru{argument}` will meet your demands. However, only when you take lower-case alphabet in these commands, you must use star-command just like `\maru*{m}`<sup>1)</sup>.

---

1) `\jegg` is an exception of this rule. When you use `\jegg`, you don't have to put the star option no matter the argument is lowercase or not. If you do it, the background color of the `\jegg` changes into gray. Only in this case, the effect of

Input

Mind the star option!

```

1 % Normal Characters
2 \maru{A}\maru{あ}\maru{QED.}
3
4 % Lowercase Alphabetic Characters
5 \maru*{a}\maru*{j}\maru*{z}

```

Output

They are used as follows.

表 1: maru series

argument	\maru	\kuromaru	\nmaru	\jegg	\jegg*
1	①	❶	①	①	❶
97	㊿	㊿	㊿	㊿	㊿
だ	㊿だ	㊿だ	㊿だ	㊿だ	㊿だ
ぼぼぼ	㊿㊿㊿	㊿㊿㊿	㊿㊿㊿	㊿㊿㊿	㊿㊿㊿
m	㊿m	㊿m	㊿m	㊿m	㊿m
Qjg	㊿Qjg	㊿Qjg	㊿Qjg	㊿Qjg	㊿Qjg

They behave as if they were single kanji or hiragana characters:

あいう㊿あいう①②③あいうえお

The spacing between \maru and other characters is adjusted using \ltjghostbeforejachar and \ltjghostafterjachar so that it behaves like hiragana or kanji.

When changing the font size using commands such as \Large, each command is scaled proportionally according to the font size change:



You can also change the current font:



the option is different.

## 6 Rotation

### 6.1 Commands

This package provides `\RotTate` and `\RotYoko`. The differences are as follows:

**In horizontal mode** You should use `\RotYoko`. The default value is 0. Therefore, if you use `\RotYoko` with no arguments, this is equal to `\RotYoko[0]`

**In vertical mode** You should use `\RotTate`. The default value is 90. Therefore, if you use `\RotTate` with no arguments, this is equal to `\RotTate[90]`

From a technical perspective: Commands like `\maru` provided by this package automatically rotate their arguments based on the “current typesetting direction” Specifically, the package applies a 0-degree rotation for horizontal writing (yoko-gaki) and a 90-degree rotation for vertical writing (tate-gaki).

The commands `\RotYoko` and `\RotTate` redefine this “automatic rotation angle” to the value specified in their arguments. Consequently, the effect is persistent unless localized (similar to how font-size commands like `\small` behave). Therefore, please ensure you use appropriate scoping, such as enclosing the command within curly braces `{...}`, when applying these settings.

Input

```
1 % In horizontal mode
2 {\RotYoko[45]\kakko{あ}\kakko{い}\kakko{う}}\par
3 {\RotYoko[60]\kakko{1}\kakko{2}\kakko{3}}
4
5 % In vertical mode
6 \parbox<t>{5\zw}{% <t> option requires lltjtext package.
7   {\RotTate[45]\kakko{あ}\kakko{い}\kakko{う}}\par
8   {\RotTate[60]\kakko{1}\kakko{2}\kakko{3}}
9 }
```

Output

(あ)(い)(う)

(あ)(い)(う)

(あ)(い)(う)

(あ)(い)(う)

## 6.2 Vertical mode

When you want to typeset ㊦, for instance, in vertical mode, you should use `\RotTate` command.

As described in the previous subsection, the effect of `\RotTate` lasts, when localized, in a certain group. So when you typeset hiragana or kanji, use it like this:

Input

```
1 % In vertical mode
2 \parbox<t>{5\zw}{%
3   {\RotTate[0]\kakko{あ}\kakko{い}\kakko{う}}\par
4   \kakko{1}\kakko{1}\kakko{3}
5 }
```

Output

(1) (あ)  
(1) (い)  
(3) (う)

## 7 The seihou series

The commands introduced below are used in exactly the same way as the maru series. In most cases, `\seihou{argument}` will meet your demands. However, only when you take lowercase alphabet in these commands, you must use star-command just like `\seihou*{m}`.

表 2: seihou series

























argument	\seihou	\kuroseihou	\seimaru	\kuroseimaru
1				
97				
だ				
ぱぱぱ				
m				
Qjg				

表 3: hishi series

argument	\hishi	\kurohishi	\maruhishi	\kuromaruhishi
1	◇	◆	◇	◆
97	◇	◆	◇	◆
だ	◇	◆	◇	◆
ぼぼぼ	◇	◆	◇	◆
m	◇	◆	◇	◆
Qjg	◇	◆	◇	◆

Input

Mind the star option!

```

1 % Normal Characters
2 \seihou{A}\seihou{あ}\seihou{QED.}
3
4 % Lowercase Alphabetic Characters
5 \seihou*a}\seihou*{j}\seihou*{z}

```

Output

AあQED.

a j Z

## 8 The kakko series

The commands introduced below are used in exactly the same way as the maru series.

In most cases, `\kakko{argument}` will meet your demands. However, only when you take lowercase alphabet in these commands, you must use star-command just like `\kakko*{m}`.

表 4: kakko series ①

argument	\kakko	\sumikakko	\kakukakko	\kikakko	\ykakko
1	(1)	[1]	[1]	(1)	⟨1⟩
97	(97)	[97]	[97]	(97)	⟨97⟩
だ	(だ)	[だ]	[だ]	(だ)	⟨だ⟩
ぼぼぼ	(ぼぼぼ)	[ぼぼぼ]	[ぼぼぼ]	(ぼぼぼ)	⟨ぼぼぼ⟩
m	(m)	[m]	[m]	(m)	⟨m⟩
Qjg	(Qjg)	[Qjg]	[Qjg]	(Qjg)	⟨Qjg⟩

表 5: kakko series ②



argument	\nykakko	\namikakko	\kagikakko	\nkagikakko	\period	\ichimoji
1	⟨1⟩	{1}	「1」	『1』	1.	1
97	⟨97⟩	{97}	「97」	『97』	97.	97
だ	⟨だ⟩	{だ}	「だ」	『だ』	だ.	だ
ばばば	⟨ばばば⟩	{ばばば}	「ばばば」	『ばばば』	ばばば.	ばばば
m	⟨m⟩	{m}	「m」	『m』	m.	m
Qjg	⟨Qjg⟩	{Qjg}	「Qjg」	『Qjg』	Qjg.	Qjg

Input

Mind the star option!

```

1 % Normal Characters
2 \kakko{A}\kakko{あ}\kakko{QED.}
3
4 % Lowercase Alphabetic Characters
5 \kakko*{a}\kakko*{j}\kakko*{z}

```

Output

(A)(あ)(QED.)

(a)(j)(z)

## 9 License

Released under the MIT License.

## 10 Version History

- v1.0.0 (2025/10/03) — Initial public release.
- v1.0.1–1.0.4 — Added \ichimoji; fixed various bugs.
- v1.1.0 (2025/10/28) — Unified all commands to zenkaku (full-width).
- v1.1.1 (2025/11/10) — Refined \ichimoji scaling logic.
- v2.0.0 (2025/12/23) — Overhauled scaling to match OTF character quality.
- v2.0.0a (2025/12/31) — Added explanations regarding several important notes.

## 11 Source Code

```

\NeedsTeXFormat{LaTeX2e}
\ProvidesPackage{KKsymbols}[2025/12/31, Version 2.0.0a]

```

```

\RequirePackage{luatexja-adjust}
\RequirePackage{expl3}
\RequirePackage{calc}
\RequirePackage{tikz}
\usetikzlibrary{shapes}

\DeclareRobustCommand{\maru}{%
  \ifstar{\maru@new@no}{\maru@new}%
}

\DeclareRobustCommand{\kuromaru}{%
  \ifstar{\kuromaru@new@no}{\kuromaru@new}%
}

\DeclareRobustCommand{\nmaru}{%
  \ifstar{\nmaru@new@no}{\nmaru@new}%
}

\DeclareRobustCommand{\jegg}{%
  \ifstar{\jegg@new@black}{\jegg@new}%
}

\DeclareRobustCommand{\seihou}{%
  \ifstar{\seihou@new@no}{\seihou@new}%
}

\DeclareRobustCommand{\kuroseihou}{%
  \ifstar{\kuroseihou@new@no}{\kuroseihou@new}%
}

\DeclareRobustCommand{\seimaru}{%
  \ifstar{\seimaru@new@no}{\seimaru@new}%
}

\DeclareRobustCommand{\kuroseimaru}{%
  \ifstar{\kuroseimaru@new@no}{\kuroseimaru@new}%
}

\DeclareRobustCommand{\hishi}{%
  \ifstar{\hishi@new@no}{\hishi@new}%
}

\DeclareRobustCommand{\kurohishi}{%
  \ifstar{\kurohishi@new@no}{\kurohishi@new}%
}

\DeclareRobustCommand{\maruhishi}{%
  \ifstar{\kurohishi@new@no}{\kurohishi@new}%
}

```

```

\DeclareRobustCommand{\kuomaruhishi}{%
  \@ifstar{\kuomaruhishi@new@no}{\kuomaruhishi@new}%
}

\DeclareRobustCommand{\ichimoji}{%
  \@ifstar{\ichimoji@new@no}{\ichimoji@new}%
}

\DeclareRobustCommand{\kakko@y@internal}[1]{\kakko@byouga@internal{ }{ }{#1}}
\DeclareRobustCommand{\kakko@y@internal@no}[1]{\kakko@byouga@internal@no{ }{ }{#1}}
\DeclareRobustCommand{\kakko@t@internal}[1]{\kakko@byouga@internal@tate{ }{ }{#1}}
\DeclareRobustCommand{\kakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{ }{ }{#1}}
\DeclareRobustCommand{\kakko}{%
  \@ifstar{\kakko@star}{\kakko@nostar}%
}

\newcommand{\kakko@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \kakko@t@internal@no{#1}%
  \else
    \kakko@y@internal@no{#1}%
  \fi
}

\newcommand{\kakko@nostar}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \kakko@t@internal{#1}%
  \else
    \kakko@y@internal{#1}%
  \fi
}

\DeclareRobustCommand{\sumikakko@y@internal}[1]{\kakko@byouga@internal{ [ ] }{#1}}
\DeclareRobustCommand{\sumikakko@y@internal@no}[1]{\kakko@byouga@internal@no{ [ ] }{#1}}
\DeclareRobustCommand{\sumikakko@t@internal}[1]{\kakko@byouga@internal@tate{ [ ] }{#1}}
\DeclareRobustCommand{\sumikakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{ [ ] }{#1}}
\DeclareRobustCommand{\sumikakko}{%
  \@ifstar{\sumikakko@star}{\sumikakko@nostar}%
}

\newcommand{\sumikakko@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \sumikakko@t@internal@no{#1}%
  \else
    \sumikakko@y@internal@no{#1}%
  \fi
}

\newcommand{\sumikakko@nostar}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \sumikakko@t@internal{#1}%
  \else
    \sumikakko@y@internal{#1}%
  \fi
}

```

```

}

\DeclareRobustCommand{\kakukakko@y@internal}[1]{\kakko@byouga@internal{ []{ } }{#1}}
\DeclareRobustCommand{\kakukakko@y@internal@no}[1]{\kakko@byouga@internal@no{ []{ } }{#1}}
\DeclareRobustCommand{\kakukakko@t@internal}[1]{\kakko@byouga@internal@tate{ []{ } }{#1}}
\DeclareRobustCommand{\kakukakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{ []{ } }{#1}}
\DeclareRobustCommand{\kakukakko}{%
  \ifstar{\kakukakko@star}{\kakukakko@nostar}%
}
\newcommand{\kakukakko@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \kakukakko@t@internal@no{#1}%
  \else
    \kakukakko@y@internal@no{#1}%
  \fi
}
\newcommand{\kakukakko@nostar}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \kakukakko@t@internal{#1}%
  \else
    \kakukakko@y@internal{#1}%
  \fi
}

\DeclareRobustCommand{\kikakko@y@internal}[1]{\kakko@byouga@internal{ {}{ } }{#1}}
\DeclareRobustCommand{\kikakko@y@internal@no}[1]{\kakko@byouga@internal@no{ {}{ } }{#1}}
\DeclareRobustCommand{\kikakko@t@internal}[1]{\kakko@byouga@internal@tate{ {}{ } }{#1}}
\DeclareRobustCommand{\kikakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{ {}{ } }{#1}}
\DeclareRobustCommand{\kikakko}{%
  \ifstar{\kikakko@star}{\kikakko@nostar}%
}
\newcommand{\kikakko@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \kikakko@t@internal@no{#1}%
  \else
    \kikakko@y@internal@no{#1}%
  \fi
}
\newcommand{\kikakko@nostar}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \kikakko@t@internal{#1}%
  \else
    \kikakko@y@internal{#1}%
  \fi
}

\DeclareRobustCommand{\yakko@y@internal}[1]{\kakko@byouga@internal{ <{}> }{#1}}
\DeclareRobustCommand{\yakko@y@internal@no}[1]{\kakko@byouga@internal@no{ <{}> }{#1}}
\DeclareRobustCommand{\yakko@t@internal}[1]{\kakko@byouga@internal@tate{ <{}> }{#1}}
\DeclareRobustCommand{\yakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{ <{}> }{#1}}

```

```

\DeclareRobustCommand{\yakko}{%
  \ifstar{\yakko@star}{\yakko@nostar}%
}
\newcommand{\yakko@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \yakko@t@internal@no{#1}%
  \else
    \yakko@y@internal@no{#1}%
  \fi
}
\newcommand{\yakko@nostar}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \yakko@t@internal{#1}%
  \else
    \yakko@y@internal{#1}%
  \fi
}

\DeclareRobustCommand{\nykakko@y@internal}[1]{\kakko@byouga@internal{ {} }{#1}}
\DeclareRobustCommand{\nykakko@y@internal@no}[1]{\kakko@byouga@internal@no{ {} }{#1}}
\DeclareRobustCommand{\nykakko@t@internal}[1]{\kakko@byouga@internal@tate{ {} }{#1}}
\DeclareRobustCommand{\nykakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{ {} }{#1}}
\DeclareRobustCommand{\nykakko}{%
  \ifstar{\nykakko@star}{\nykakko@nostar}%
}
\newcommand{\nykakko@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \nykakko@t@internal@no{#1}%
  \else
    \nykakko@y@internal@no{#1}%
  \fi
}
\newcommand{\nykakko@nostar}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \nykakko@t@internal{#1}%
  \else
    \nykakko@y@internal{#1}%
  \fi
}

\DeclareRobustCommand{\namikakko@y@internal}[1]{\kakko@byouga@internal{ {} }{#1}}
\DeclareRobustCommand{\namikakko@y@internal@no}[1]{\kakko@byouga@internal@no{ {} }{#1}}
\DeclareRobustCommand{\namikakko@t@internal}[1]{\kakko@byouga@internal@tate{ {} }{#1}}
\DeclareRobustCommand{\namikakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{ {} }{#1}}
\DeclareRobustCommand{\namikakko}{%
  \ifstar{\namikakko@star}{\namikakko@nostar}%
}
\newcommand{\namikakko@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \namikakko@t@internal@no{#1}%

```

```

\else
\namikakko@y@internal@no{#1}%
\fi
}
\newcommand{\namikakko@nostar}[1]{%
\ifnum\ltjgetparameter{direction}=3\relax
\namikakko@t@internal{#1}%
\else
\namikakko@y@internal{#1}%
\fi
}

\DeclareRobustCommand{\kagikakko@y@internal}[1]{\kakko@byouga@internal{「」}{#1}}
\DeclareRobustCommand{\kagikakko@y@internal@no}[1]{\kakko@byouga@internal@no{「」}{#1}}
\DeclareRobustCommand{\kagikakko@t@internal}[1]{\kakko@byouga@internal@tate{「」}{#1}}
\DeclareRobustCommand{\kagikakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{「」}{#1}}
\DeclareRobustCommand{\kagikakko}{%
\@ifstar{\kagikakko@star}{\kagikakko@nostar}%
}
\newcommand{\kagikakko@star}[1]{%
\ifnum\ltjgetparameter{direction}=3\relax
\kagikakko@t@internal@no{#1}%
\else
\kagikakko@y@internal@no{#1}%
\fi
}
\newcommand{\kagikakko@nostar}[1]{%
\ifnum\ltjgetparameter{direction}=3\relax
\kagikakko@t@internal{#1}%
\else
\kagikakko@y@internal{#1}%
\fi
}

\DeclareRobustCommand{\nkagikakko@y@internal}[1]{\kakko@byouga@internal{『』}{#1}}
\DeclareRobustCommand{\nkagikakko@y@internal@no}[1]{\kakko@byouga@internal@no{『』}{#1}}
\DeclareRobustCommand{\nkagikakko@t@internal}[1]{\kakko@byouga@internal@tate{『』}{#1}}
\DeclareRobustCommand{\nkagikakko@t@internal@no}[1]{\kakko@byouga@internal@tate@no{『』}{#1}}
\DeclareRobustCommand{\nkagikakko}{%
\@ifstar{\nkagikakko@star}{\nkagikakko@nostar}%
}
\newcommand{\nkagikakko@star}[1]{%
\ifnum\ltjgetparameter{direction}=3\relax
\nkagikakko@t@internal@no{#1}%
\else
\nkagikakko@y@internal@no{#1}%
\fi
}
\newcommand{\nkagikakko@nostar}[1]{%

```

```

\ifnum\ltjgetparameter{direction}=3\relax
  \nkagikakko@t@internal{#1}%
\else
  \nkagikakko@y@internal{#1}%
\fi
}

\DeclareRobustCommand{\period@y@internal}[1]{\kakko@byouga@internal{\relax}{.}{#1}}
\DeclareRobustCommand{\period@y@internal@no}[1]{\kakko@byouga@internal@no{\relax}{.}{#1}}
\DeclareRobustCommand{\period@t@internal}[1]{\kakko@byouga@internal@tate{\relax}{.}{#1}}
\DeclareRobustCommand{\period@t@internal@no}[1]{\kakko@byouga@internal@tate@no{\relax}{.}{#1}}
\DeclareRobustCommand{\period}{%
  \@ifstar{\period@star}{\period@nostar}%
}
\newcommand{\period@star}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \period@t@internal@no{#1}%
  \else
    \period@y@internal@no{#1}%
  \fi
}
\newcommand{\period@nostar}[1]{%
  \ifnum\ltjgetparameter{direction}=3\relax
    \period@t@internal{#1}%
  \else
    \period@y@internal{#1}%
  \fi
}

% 全体で使用
\NewDocumentCommand{\shukushou@adj@new}{ m m m }{%
  \ifdim #1 < #2%
    \resizebox*{\width}{#2}{#3}%
  \else%
    \resizebox*{#2}{#2}{#3}%
  \fi%
}
\NewDocumentCommand{\shukushou@adj@new@no}{ m m m }{%
  \ifdim #1 < #2%
    #3%
  \else%
    \resizebox*{!}{#2}{#3}%
  \fi%
}
\NewDocumentCommand{\RotYoko}{0{0}}{%
  \def\KKsymbolsRot@val@y{#1}%
}
\NewDocumentCommand{\RotTate}{0{90}}{%

```

```

\def\KKsymbolsRot@val@t{#1}%
}
\def\KKsymbolsRot@val@t{90}
\def\KKsymbolsRot@val@y{0}
\NewDocumentCommand{\rot@or@not@kksym}{-}{-}{%
\ifnum\ltjgetparameter{direction}=3
\def\rot@kksym@tateyoko{\KKsymbolsRot@val@t}%
\else
\def\rot@kksym@tateyoko{\KKsymbolsRot@val@y}%
\fi
}
%%

% \maru
\NewDocumentCommand{\vertical@adj@maru@new}{-}{-}{%
\ifnum\ltjgetparameter{direction}=3
-.5\zw%
\else
-.12\zw%
\fi
}
\newlength{\maru@boxwidth@new}
\newlength{\maru@boxwidth@inner}
\newlength{\maru@var@yokohaba}
\newlength{\maru@var@yokohaba@cal}
\newlength{\maru@var@tate}
\newlength{\maru@var@fuka}
\newlength{\maru@var@zenkou}

\NewDocumentCommand{\shukushou@adj@new@no@maru}{ m m m m }{-}{%
\ifdim #1 < #2%
\ifdim #3 > #2%
\resizebox*{#3}{!}{#4}%
\else%
\scalebox{.9}{#4}%
\fi%
\else%
\resizebox*{!}{#2}{#4}%
\fi%
}

\DeclareRobustCommand{\maru@new}[1]{%
\rot@or@not@kksym%
\setlength{\maru@boxwidth@new}{\zw}%
\settowidth{\maru@var@yokohaba}{#1}%
\pgfmathsetlength{\maru@boxwidth@inner}{0.87 * \maru@boxwidth@new / sqrt(2)}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \maru@boxwidth@new{%

```



```

\raisebox{\vertical@adj@maru@new}{%
\ vbox to \maru@boxwidth@new{%
\ vss%
\ hbox to \maru@boxwidth@new{%
\ hss%
\ tikz[baseline=(char.base)]{%
\ node[
shape=circle,
line width=.04\maru@boxwidth@new,
minimum size=.9\maru@boxwidth@new,
draw,
inner sep=.02\maru@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%
\ vbox to \maru@boxwidth@inner{%
\ vss%
\ hbox to \maru@boxwidth@inner{%
\ hss%
\ shukushou@adj@new{\maru@var@yokohaba}{\maru@boxwidth@inner}{#1}%
\ hss%
}%
\ vss%
}%
};
}%
\ hss%
}%
\ vss%
}%
}%
}%
\ ltjghostafterjachar%
}
\DeclareRobustCommand{\maru@new@no}[1]{%
\ rot@or@not@kksym%
\ setlength{\maru@boxwidth@new}{\zw}%
\ settowidth{\maru@var@yokohaba}{#1}%
\ settoheight{\maru@var@tate}{#1}%
\ settodepth{\maru@var@fuka}{#1}%
\ pgfmthsetlength{\maru@var@zenkou}{\maru@var@tate + \maru@var@fuka}%
\ pgfmthsetlength{\maru@var@yokohaba@cal}{0.85 * \maru@var@yokohaba}%
\ pgfmthsetlength{\maru@boxwidth@inner}{0.87 * \maru@boxwidth@new / sqrt(2)}%
\ leavevmode%
\ ltjghostbeforejachar%
\ hbox to \maru@boxwidth@new{%
\ raisebox{\vertical@adj@maru@new}{%
\ vbox to \maru@boxwidth@new{%
\ vss%
\ hbox to \maru@boxwidth@new{%
\ hss%

```

```

\tikz[baseline=(char.base)]{%
  \node[
    shape=circle,
    line width=.04\maru@boxwidth@new,
    minimum size=.9\maru@boxwidth@new,
    draw,
    inner sep=.02\maru@boxwidth@new,
    rotate=\rot@kksym@tateyoko
  ] (char){%
    \vbox to \maru@boxwidth@inner{
      \vss%
      \hbox to \maru@boxwidth@inner{%
        \hss%
        \shukushou@adj@new@no@maru{\maru@var@zenkou}{\maru@boxwidth@inner}{\maru@var@yokohaba@cal}{#1}%
        \hss%
      }%
    }%
  };
}%
\hss%
}%
\vss%
}%
}%
\ltjghostafterjachar%
}

```

```

\DeclareRobustCommand{\kuromaru@new}[1]{%
  \rot@or@not@kksym%
  \setlength{\maru@boxwidth@new}{\zw}%
  \settowidth{\maru@var@yokohaba}{#1}%
  \pgfmithsetlength{\maru@boxwidth@inner}{0.87 * \maru@boxwidth@new / sqrt(2)}%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \maru@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \maru@boxwidth@new{%
        \vss%
        \hbox to \maru@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              shape=circle,
              fill=black,%%
              line width=.04\maru@boxwidth@new,
              minimum size=.9\maru@boxwidth@new,

```

```

draw,
inner sep=.02\maru@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%
\ vbox to \maru@boxwidth@inner{
\ vss%
\ hbox to \maru@boxwidth@inner{%
\ hss%
\shukushou@adj@new{\maru@var@yokohaba}{\maru@boxwidth@inner}{%
\textcolor{white}{#1}}%
\ hss%
}%
\ vss%
}%
};
}%
\ hss%
}%
\ vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\kuromaru@new@no}[1]{%
\rot@or@not@kksym%
\setlength{\maru@boxwidth@new}{\zw}%
\settowidth{\maru@var@yokohaba}{#1}%
\settoheight{\maru@var@tate}{#1}%
\settodepth{\maru@var@fuka}{#1}%
\pgfmithsetlength{\maru@var@zenkou}{\maru@var@tate + \maru@var@fuka}%
\pgfmithsetlength{\maru@var@yokohaba@cal}{0.85 * \maru@var@yokohaba}%
\pgfmithsetlength{\maru@boxwidth@inner}{0.87 * \maru@boxwidth@new / sqrt(2)}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \maru@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\ vbox to \maru@boxwidth@new{%
\ vss%
\ hbox to \maru@boxwidth@new{%
\ hss%
\tikz[baseline=(char.base)]{%
\node[
shape=circle,
fill=black,%%
line width=.04\maru@boxwidth@new,
minimum size=.9\maru@boxwidth@new,
draw,
inner sep=.02\maru@boxwidth@new,
rotate=\rot@kksym@tateyoko

```

```

] (char){%
\ vbox to \ maru@boxwidth@inner{
  \ vss%
  \ hbox to \ maru@boxwidth@inner{%
    \ hss%
    \ shukushou@adj@new@no@maru{\ maru@var@zenkou}{\ maru@boxwidth@inner}{\
      maru@var@yokohaba@cal}{%
      \ textcolor{white}{#1}}%
    \ hss%
  }%
  \ vss%
}%
};
}%
\ hss%
}%
\ vss%
}%
}%
}%
\ ltjghostafterjachar%
}

\ DeclareRobustCommand{\ nmaru@new}[1]{%
  \ rot@or@not@kksym%
  \ setlength{\ maru@boxwidth@new}{\ zw}%
  \ settowidth{\ maru@var@yokohaba}{#1}%
  \ pgfmathsetlength{\ maru@boxwidth@inner}{0.85 * \ maru@boxwidth@new / sqrt(2)}%
  \ leavevmode%
  \ ltjghostbeforejachar%
  \ hbox to \ maru@boxwidth@new{%
    \ raisebox{\ vertical@adj@maru@new}{%
      \ vbox to \ maru@boxwidth@new{%
        \ vss%
        \ hbox to \ maru@boxwidth@new{%
          \ hss%
          \ tikz[baseline=(char.base)]{%
            \ node[
              shape=circle,
              line width=.03\ maru@boxwidth@new,
              minimum size=.88\ maru@boxwidth@new,
              draw, double, double distance=.03\ zw,%%
              inner sep=.06\ maru@boxwidth@new,
              rotate=\ rot@kksym@tateyoko,
              scale=.87
            ] (char){%
              \ vbox to \ maru@boxwidth@inner{
                \ vss%
                \ hbox to \ maru@boxwidth@inner{%

```

```

\hss%
\shukushou@adj@new{\maru@var@yokohaba}{\maru@boxwidth@inner}{#1}%
\hss%
}%
\vss%
}%
};
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\nmaru@new@no}[1]{%
\rot@or@not@kksym%
\setlength{\maru@boxwidth@new}{\zw}%
\settowidth{\maru@var@yokohaba}{#1}%
\settoheight{\maru@var@tate}{#1}%
\settodepth{\maru@var@fuka}{#1}%
\pgfmithsetlength{\maru@var@zenkou}{\maru@var@tate + \maru@var@fuka}%
\pgfmithsetlength{\maru@var@yokohaba@cal}{0.85 * \maru@var@yokohaba}%
\pgfmithsetlength{\maru@boxwidth@inner}{0.82 * \maru@boxwidth@new / sqrt(2)}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \maru@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\vbox to \maru@boxwidth@new{%
\vss%
\hbox to \maru@boxwidth@new{%
\hss%
\tikz[baseline=(char.base)]{%
\node[
shape=circle,
line width=.03\maru@boxwidth@new,
minimum size=.88\maru@boxwidth@new,
draw, double, double distance=.03\zw,%%
inner sep=.06\maru@boxwidth@new,
rotate=\rot@kksym@tateyoko,
scale=.9
] (char){%
\vbox to \maru@boxwidth@inner{%
\vss%
\hbox to \maru@boxwidth@inner{%
\hss%
\shukushou@adj@new@no@maru{\maru@var@zenkou}{\maru@boxwidth@inner}{\maru@var@yokohaba@cal}{#1}%
\hss%

```

```

    }%
    \vss%
  }%
};
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}

```

```

\newlength{\jegg@boxwidth@inner@cal}%%
\DeclareRobustCommand{\jegg@new}[1]{%
  \rot@or@not@kksym%
  \setlength{\maru@boxwidth@new}{\zw}%
  \settowidth{\maru@var@yokohaba}{\#1}%
  \pgfmithsetlength{\maru@boxwidth@inner}{0.87 * \maru@boxwidth@new / sqrt(2)}%
  \pgfmithsetlength{\jegg@boxwidth@inner@cal}{0.77 * \maru@boxwidth@inner}%%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \maru@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \maru@boxwidth@new{%
        \vss%
        \hbox to \maru@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              shape=ellipse,
              line width=.04\maru@boxwidth@new,
              minimum height=.9\maru@boxwidth@new,
              minimum width=.7\maru@boxwidth@new,
              draw,
              inner sep=0\maru@boxwidth@new,
              rotate=\rot@kksym@tateyoko
            ] (char){%
              \vbox to \maru@boxwidth@inner{%
                \vss%
                \hbox to \jegg@boxwidth@inner@cal{%
                  \hss%
                  \shukushou@adj@new{\maru@var@yokohaba}{\jegg@boxwidth@inner@cal}{\#1}%
                  \hss%
                }%
                \vss%
              }%
            }%
          }%
        }%
      }%
    }%
  };
}

```

```

}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\jegg@new@black}[1]{%
  \rot@or@not@kksym%
  \setlength{\maru@boxwidth@new}{\zw}%
  \settowidth{\maru@var@yokohaba}{\#1}%
  \pgfmathsetlength{\maru@boxwidth@inner}{0.87 * \maru@boxwidth@new / sqrt(2)}%
  \pgfmathsetlength{\jegg@boxwidth@inner@cal}{0.77 * \maru@boxwidth@inner}%%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \maru@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \maru@boxwidth@new{%
        \vss%
        \hbox to \maru@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              shape=ellipse,
              line width=.04\maru@boxwidth@new,
              minimum height=.9\maru@boxwidth@new,
              minimum width=.7\maru@boxwidth@new,
              draw,
              fill=black!70,
              inner sep=0\maru@boxwidth@new,
              rotate=\rot@kksym@tateyoko
            ] (char){%
              \vbox to \maru@boxwidth@inner{%
                \vss%
                \hbox to \jegg@boxwidth@inner@cal{%
                  \hss%
                  \shukushou@adj@new{\maru@var@yokohaba}{\jegg@boxwidth@inner@cal}{\#1}%
                  \hss%
                }%
                \vss%
              }%
            };
          }%
          \hss%
        }%
        \vss%
      }%
    }%
  }%
}

```

```

}%
\ltjghostafterjachar%
}
%%

% \seihou
\NewDocumentCommand{\vertical@adj@seihou@new}{}{%
  \ifnum\ltjgetparameter{direction}=3
    -.5\zw%
  \else
    -.12\zw%
  \fi
}
\newlength{\seihou@boxwidth@new}
\newlength{\seihou@boxwidth@inner}
\newlength{\seihou@var@yokohaba@cal}
\newlength{\seihou@var@yokohaba}
\newlength{\seihou@var@tate}
\newlength{\seihou@var@fuka}
\newlength{\seihou@var@zenkou}

\NewDocumentCommand{\shukushou@adj@new@no@seihou}{ m m m m }{%
  \ifdim #1 < #2%
    \ifdim #3 > #2%
      \resizebox*{#3}{!}{#4}%
    \else%
      \scalebox{.9}{#4}%
    \fi%
  \else%
    \resizebox*{!}{#2}{#4}%
  \fi%
}

\DeclareRobustCommand{\seihou@new}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{#1}%
  \pgfmithsetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \seihou@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \seihou@boxwidth@new{%
        \vss%
        \hbox to \seihou@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              line width=.04\seihou@boxwidth@new,

```



```

        minimum size=.85\seihou@boxwidth@new,
        draw,
        inner sep=.1\seihou@boxwidth@new,
        rotate=\rot@kksym@tateyoko
    ] (char){%
\ vbox to \seihou@boxwidth@inner{
    \vss%
    \ hbox to \seihou@boxwidth@inner{%
        \hss%
        \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{#1}%
        \hss%
    }%
    \vss%
}%
};
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\seihou@new@no}[1]{%
    \rot@or@not@kksym%
    \setlength{\seihou@boxwidth@new}{\zw}%
    \settowidth{\seihou@var@yokohaba}{#1}%
    \settoheight{\seihou@var@tate}{#1}%
    \settodepth{\seihou@var@fuka}{#1}%
    \pgfmithsetlength{\seihou@var@zenkou}{\seihou@var@tate + \seihou@var@fuka}%
    \pgfmithsetlength{\seihou@var@yokohaba@cal}{0.85 * \seihou@var@yokohaba}%
    \pgfmithsetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
    \leavevmode%
    \ltjghostbeforejachar%
    \ hbox to \seihou@boxwidth@new{%
        \raisebox{\vertical@adj@maru@new}{%
            \ vbox to \seihou@boxwidth@new{%
                \vss%
                \ hbox to \seihou@boxwidth@new{%
                    \hss%
                    \tikz[baseline=(char.base)]{%
                        \node[
                            line width=.04\seihou@boxwidth@new,
                            minimum size=.85\seihou@boxwidth@new,
                            draw,
                            inner sep=.1\seihou@boxwidth@new,
                            rotate=\rot@kksym@tateyoko
                        ] (char){%
                            \ vbox to \seihou@boxwidth@inner{

```

```

\ss%
\hbox to \seihou@boxwidth@inner{%
\hss%
\shukushou@adj@new@no@seihou{\seihou@var@zenkou}{\seihou@boxwidth@inner}{\
seihou@var@yokohaba@cal}{#1}%
\hss%
}%
\ss%
}%
};
}%
\hss%
}%
\ss%
}%
}%
}%
\ltjghostafterjachar%
}

```

```

\DeclareRobustCommand{\kuroseihou@new}[1]{%
\rot@or@not@kksym%
\setlength{\seihou@boxwidth@new}{\zw}%
\settowidth{\seihou@var@yokohaba}{#1}%
\pgfmatssetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \seihou@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\vbox to \seihou@boxwidth@new{%
\ss%
\hbox to \seihou@boxwidth@new{%
\hss%
\tikz[baseline=(char.base)]{%
\node[
line width=.04\seihou@boxwidth@new,
minimum size=.85\seihou@boxwidth@new,
draw,
fill=black,%%
inner sep=.1\seihou@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%
\vbox to \seihou@boxwidth@inner{
\ss%
\hbox to \seihou@boxwidth@inner{%
\hss%
\shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{%
\textcolor{white}{#1}}%
\hss%

```

```

    }%
    \vss%
  }%
};
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\kuroseihou@new@no}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{\#1}%
  \settoheight{\seihou@var@tate}{\#1}%
  \settodepth{\seihou@var@fuka}{\#1}%
  \pgfmithsetlength{\seihou@var@zenkou}{\seihou@var@tate + \seihou@var@fuka}%
  \pgfmithsetlength{\seihou@var@yokohaba@cal}{0.85 * \seihou@var@yokohaba}%
  \pgfmithsetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \seihou@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \seihou@boxwidth@new{%
        \vss%
        \hbox to \seihou@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              line width=.04\seihou@boxwidth@new,
              minimum size=.85\seihou@boxwidth@new,
              draw,
              fill=black,%%
              inner sep=.1\seihou@boxwidth@new,
              rotate=\rot@kksym@tateyoko
            ] (char){%
              \vbox to \seihou@boxwidth@inner{
                \vss%
                \hbox to \seihou@boxwidth@inner{%
                  \hss%
                  \shukushou@adj@new@no@seihou{\seihou@var@zenkou}{\seihou@boxwidth@inner}{\seihou@var@yokohaba@cal}{%
                    \textcolor{white}{\#1}}%
                  \hss%
                }%
                \vss%
              }%
            }%
          }
        }
      }
    }
  }
}

```

```

    };
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}

\DeclareRobustCommand{\seimaru@new}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{#1}%
  \pgfmathsetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \seihou@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \seihou@boxwidth@new{%
        \vss%
        \hbox to \seihou@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              line width=.04\seihou@boxwidth@new,
              minimum size=.85\seihou@boxwidth@new,
              draw,
              rounded corners=.13\zw,%%
              inner sep=.1\seihou@boxwidth@new,
              rotate=\rot@kksym@tateyoko
            ] (char){%
              \vbox to \seihou@boxwidth@inner{%
                \vss%
                \hbox to \seihou@boxwidth@inner{%
                  \hss%
                  \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{#1}%
                  \hss%
                }%
                \vss%
              }%
            };
          }%
          \hss%
        }%
        \vss%
      }%
    }%
  }%
}

```

```

}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\seimaru@new@no}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{\#1}%
  \settoheight{\seihou@var@tate}{\#1}%
  \settodepth{\seihou@var@fuka}{\#1}%
  \pgfmathsetlength{\seihou@var@zenkou}{\seihou@var@tate + \seihou@var@fuka}%
  \pgfmathsetlength{\seihou@var@yokohaba@cal}{0.85 * \seihou@var@yokohaba}%
  \pgfmathsetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \seihou@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \seihou@boxwidth@new{%
        \vss%
        \hbox to \seihou@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              line width=.04\seihou@boxwidth@new,
              minimum size=.85\seihou@boxwidth@new,
              draw,
              rounded corners=.13\zw,%%
              inner sep=.1\seihou@boxwidth@new,
              rotate=\rot@kksym@tateyoko
            ] (char){%
              \vbox to \seihou@boxwidth@inner{
                \vss%
                \hbox to \seihou@boxwidth@inner{%
                  \hss%
                  \shukushou@adj@new@no@seihou{\seihou@var@zenkou}{\seihou@boxwidth@inner}{\seihou@var@yokohaba@cal}{\#1}%
                  \hss%
                }%
                \vss%
              }%
            };
          }%
        }%
        \hss%
      }%
    }%
  }%
  \ltjghostafterjachar%
}

```

```

\DeclareRobustCommand{\kuroseimaru@new}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{\#1}%
  \pgfmithsetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \seihou@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \seihou@boxwidth@new{%
        \vss%
        \hbox to \seihou@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              line width=.04\seihou@boxwidth@new,
              minimum size=.85\seihou@boxwidth@new,
              draw,
              fill=black,%%
              rounded corners=.13\zw,%%
              inner sep=.1\seihou@boxwidth@new,
              rotate=\rot@kksym@tateyoko
            ] (char){%
              \vbox to \seihou@boxwidth@inner{
                \vss%
                \hbox to \seihou@boxwidth@inner{%
                  \hss%
                  \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{%
                    \textcolor{white}{\#1}}%
                  \hss%
                }%
                \vss%
              }%
            };
          }%
          \hss%
        }%
        \vss%
      }%
    }%
  }%
  \ltjghostafterjachar%
}

\DeclareRobustCommand{\kuroseimaru@new@no}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{\#1}%
  \settoheight{\seihou@var@tate}{\#1}%
  \settodepth{\seihou@var@fuka}{\#1}%

```

```

\pgfmathsetlength{\seihou@var@zenkou}{\seihou@var@tate + \seihou@var@fuka}%
\pgfmathsetlength{\seihou@var@yokohaba@cal}{0.85 * \seihou@var@yokohaba}%
\pgfmathsetlength{\seihou@boxwidth@inner}{0.68 * \seihou@boxwidth@new}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \seihou@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\vbox to \seihou@boxwidth@new{%
\vss%
\hbox to \seihou@boxwidth@new{%
\hss%
\tikz[baseline=(char.base)]{%
\node[
line width=.04\seihou@boxwidth@new,
minimum size=.85\seihou@boxwidth@new,
draw,
fill=black,%%
rounded corners=.13\zw,%%
inner sep=.1\seihou@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%
\vbox to \seihou@boxwidth@inner{
\vss%
\hbox to \seihou@boxwidth@inner{%
\hss%
\shukushou@adj@new@no@seihou{\seihou@var@zenkou}{\seihou@boxwidth@inner}{\seihou@var@yokohaba@cal}{%
\textcolor{white}{\#1}}%
\hss%
}%
\vss%
}%
};
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}

```

```

\DeclareRobustCommand{\hishi@new}[1]{%
\rot@or@not@kksym%
\setlength{\seihou@boxwidth@new}{\zw}%
\settowidth{\seihou@var@yokohaba}{\#1}%
\pgfmathsetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
\leavevmode%

```

```

\ltjghostbeforejachar%
\hbox to \seihou@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\vbox to \seihou@boxwidth@new{%
\vss%
\hbox to \seihou@boxwidth@new{%
\hss%
\tikz[baseline=(char.base)]{%
\node[
line width=.04\seihou@boxwidth@new,
minimum size=.5\seihou@boxwidth@new,
draw,
shape=diamond,
inner sep=.03\seihou@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%
\vbox to \seihou@boxwidth@inner{
\vss%
\hbox to \seihou@boxwidth@inner{%
\hss%
\shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{#1}%
\hss%
}%
\vss%
}%
};
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\hishi@new@no}[1]{%
\rot@or@not@kksym%
\setlength{\seihou@boxwidth@new}{\zw}%
\settowidth{\seihou@var@yokohaba}{#1}%
\settoheight{\seihou@var@tate}{#1}%
\settodepth{\seihou@var@fuka}{#1}%
\pgfmatssetlength{\seihou@var@zenkou}{(\seihou@var@tate + \seihou@var@fuka)*99}%
\pgfmatssetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \seihou@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\vbox to \seihou@boxwidth@new{%
\vss%
\hbox to \seihou@boxwidth@new{%

```



```

\hss%
\tikz[baseline=(char.base)]{%
  \node[
    line width=.04\seihou@boxwidth@new,
    minimum size=.5\seihou@boxwidth@new,
    draw,
    shape=diamond,
    inner sep=.03\seihou@boxwidth@new,
    rotate=\rot@kksym@tateyoko
  ] (char){%
    \vbox to \seihou@boxwidth@inner{
      \vss%
      \hbox to \seihou@boxwidth@inner{%
        \hss%
        % これだけ他のやつと違うので注意！
        \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{#1}%
        \hss%
      }%
    }%
  };
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}

```

```

\DeclareRobustCommand{\maruhishi@new}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{#1}%
  \pgfmathsetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
  \leavevmode%
  \ltjghostbeforejachar%
  \hbox to \seihou@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \vbox to \seihou@boxwidth@new{%
        \vss%
        \hbox to \seihou@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              line width=.04\seihou@boxwidth@new,
              minimum size=.5\seihou@boxwidth@new,
              draw,

```

```

rounded corners=.06\zw,%%
shape=diamond,
inner sep=.03\seihou@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%
\ vbox to \seihou@boxwidth@inner{
\ vss%
\ hbox to \seihou@boxwidth@inner{%
\ hss%
\shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{#1}%
\ hss%
}%
\ vss%
}%
};
}%
\ hss%
}%
\ vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\maruhishi@new@no}[1]{%
\rot@or@not@kksym%
\setlength{\seihou@boxwidth@new}{\zw}%
\settowidth{\seihou@var@yokohaba}{#1}%
\settoheight{\seihou@var@tate}{#1}%
\settodepth{\seihou@var@fuka}{#1}%
\pgfmathsetlength{\seihou@var@zenkou}{(\seihou@var@tate + \seihou@var@fuka)*99}%
\pgfmathsetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \seihou@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\ vbox to \seihou@boxwidth@new{%
\ vss%
\ hbox to \seihou@boxwidth@new{%
\ hss%
\ tikz[baseline=(char.base)]{%
\ node[
line width=.04\seihou@boxwidth@new,
minimum size=.5\seihou@boxwidth@new,
draw,
rounded corners=.06\zw,%%
shape=diamond,
inner sep=.03\seihou@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%

```

```

\ vbox to \seihou@boxwidth@inner{
  \vss%
  \ hbox to \seihou@boxwidth@inner{%
    \hss%
    % これだけ他のやつと違うので注意！
    \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{#1}%
    \hss%
  }%
  \vss%
}%
};
}%
\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}

```

```

\DeclareRobustCommand{\kurohishi@new}[1]{%
  \rot@or@not@kksym%
  \setlength{\seihou@boxwidth@new}{\zw}%
  \settowidth{\seihou@var@yokohaba}{#1}%
  \pgfmithsetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
  \leavevmode%
  \ltjghostbeforejachar%
  \ hbox to \seihou@boxwidth@new{%
    \raisebox{\vertical@adj@maru@new}{%
      \ vbox to \seihou@boxwidth@new{%
        \vss%
        \ hbox to \seihou@boxwidth@new{%
          \hss%
          \tikz[baseline=(char.base)]{%
            \node[
              line width=.04\seihou@boxwidth@new,
              minimum size=.5\seihou@boxwidth@new,
              draw,
              fill=black,%%
              shape=diamond,
              inner sep=.03\seihou@boxwidth@new,
              rotate=\rot@kksym@tateyoko
            ] (char){%
              \ vbox to \seihou@boxwidth@inner{
                \vss%
                \ hbox to \seihou@boxwidth@inner{%
                  \hss%
                  \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{%

```

```

        \textcolor{white}{\#1}}%
    \hss%
}%
    \vss%
}%
};
}%
    \hss%
}%
    \vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\kurohishi@new@no}[1]{%
    \rot@or@not@kksym%
    \setlength{\seihou@boxwidth@new}{\zw}%
    \settowidth{\seihou@var@yokohaba}{\#1}%
    \settoheight{\seihou@var@tate}{\#1}%
    \settodepth{\seihou@var@fuka}{\#1}%
    \pgfmathsetlength{\seihou@var@zenkou}{(\seihou@var@tate + \seihou@var@fuka)*99}%
    \pgfmathsetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
    \leavevmode%
    \ltjghostbeforejachar%
    \hbox to \seihou@boxwidth@new{%
        \raisebox{\vertical@adj@maru@new}{%
            \vbox to \seihou@boxwidth@new{%
                \vss%
                \hbox to \seihou@boxwidth@new{%
                    \hss%
                    \tikz[baseline=(char.base)]{%
                        \node[
                            line width=.04\seihou@boxwidth@new,
                            minimum size=.5\seihou@boxwidth@new,
                            draw,
                            fill=black,%%%
                            shape=diamond,
                            inner sep=.03\seihou@boxwidth@new,
                            rotate=\rot@kksym@tateyoko
                        ] (char){%
                            \vbox to \seihou@boxwidth@inner{
                                \vss%
                                \hbox to \seihou@boxwidth@inner{%
                                    \hss%
                                    %  これだけ他のやつと違うので注意！
                                    \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{%
                                        \textcolor{white}{\#1}}%
                                    \hss%
                                }%
                            }%
                        }%
                    }%
                }%
            }%
        }%
    }%
}

```

```

        \vss%
    }%
};
}%
    \hss%
}%
    \vss%
}%
}%
}%
    \ltjghostafterjachar%
}

\DeclareRobustCommand{\kuromaruhishi@new}[1]{%
    \rot@or@not@kksym%
    \setlength{\seihou@boxwidth@new}{\zw}%
    \settowidth{\seihou@var@yokohaba}{\#1}%
    \pgfmthsetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
    \leavevmode%
    \ltjghostbeforejachar%
    \hbox to \seihou@boxwidth@new{%
        \raisebox{\vertical@adj@maru@new}{%
            \vbox to \seihou@boxwidth@new{%
                \vss%
                \hbox to \seihou@boxwidth@new{%
                    \hss%
                    \tikz[baseline=(char.base)]{%
                        \node[
                            line width=.04\seihou@boxwidth@new,
                            minimum size=.5\seihou@boxwidth@new,
                            draw,
                            fill=black,%%
                            rounded corners=.06\zw,%%
                            shape=diamond,
                            inner sep=.03\seihou@boxwidth@new,
                            rotate=\rot@kksym@tateyoko
                        ] (char){%
                            \vbox to \seihou@boxwidth@inner{%
                                \vss%
                                \hbox to \seihou@boxwidth@inner{%
                                    \hss%
                                    \shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{%
                                        \textcolor{white}{\#1}}%
                                    \hss%
                                }%
                                \vss%
                            }%
                        };
                    }%
                }
            }
        }
    }
}

```

```

\hss%
}%
\vss%
}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\kuromaruhishi@new@no}[1]{%
\rot@or@not@kksym%
\setlength{\seihou@boxwidth@new}{\zw}%
\settowidth{\seihou@var@yokohaba}{\#1}%
\settoheight{\seihou@var@tate}{\#1}%
\settodepth{\seihou@var@fuka}{\#1}%
\pgfmathsetlength{\seihou@var@zenkou}{(\seihou@var@tate + \seihou@var@fuka)*99}%
\pgfmathsetlength{\seihou@boxwidth@inner}{0.85 * \seihou@boxwidth@new / 2}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \seihou@boxwidth@new{%
\raisebox{\vertical@adj@maru@new}{%
\vbox to \seihou@boxwidth@new{%
\vss%
\hbox to \seihou@boxwidth@new{%
\hss%
\tikz[baseline=(char.base)]{%
\node[
line width=.04\seihou@boxwidth@new,
minimum size=.5\seihou@boxwidth@new,
draw,
fill=black,%%
rounded corners=.06\zw,%%
shape=diamond,
inner sep=.03\seihou@boxwidth@new,
rotate=\rot@kksym@tateyoko
] (char){%
\vbox to \seihou@boxwidth@inner{
\vss%
\hbox to \seihou@boxwidth@inner{%
\hss%
% これだけ他のやつと違うので注意！
\shukushou@adj@new{\seihou@var@yokohaba}{\seihou@boxwidth@inner}{%
\textcolor{white}{\#1}}%
\hss%
}%
\vss%
}%
};
}%
\hss%
}%

```

```

\ vss%
}%
}%
}%
\ltjghostafterjachar%
}
%%%
```

```

% \kakko
\newlength{\kakko@boxwidth@new}
\newlength{\kakko@boxwidth@inner}
\newlength{\kakko@var@yokohaba}
\newlength{\kakko@var@yokohaba@cal}
\newlength{\kakko@var@tate}
\newlength{\kakko@var@fuka}
\newlength{\kakko@var@zenkou}
```

```

\NewDocumentCommand{\shukushou@adj@new@no@kakko}{ m m m m }{%
\ifdim #1 < #2%
\ifdim #3 > #2%
\resizebox*{#3}{!}{#4}%
\else%
\scalebox{.9}{#4}%
\fi%
\else%
\resizebox*{!}{#2}{#4}%
\fi%
}
```

```

\DeclareRobustCommand{\kakko@byouga@internal}[3]{% 横の方
\rot@or@not@kksym%
\setlength{\kakko@boxwidth@new}{\zw}%
\settowidth{\kakko@var@yokohaba}{#3}%
\pgfmathsetlength{\kakko@boxwidth@inner}{0.8 * \kakko@boxwidth@new}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \zw{\hss%
\scalebox{.63}[1]{#1}\hspace*{-.1\zw}%
\vbox to \kakko@boxwidth@inner{
\ vss%
\hbox to \kakko@boxwidth@inner{%
\hss%
\rotatebox[origin=c]{\rot@kksym@tateyoko}{%
\shukushou@adj@new{\kakko@var@yokohaba}{\kakko@boxwidth@inner}{#3}}%
\hss%
}%
\ vss%
}%
\hspace*{-.1\zw}\scalebox{.63}[1]{#2}%
```

```

\hss}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\kakko@byouga@internal@no}[3]{% 横の方
\rot@or@not@kksym%
\setlength{\kakko@boxwidth@new}{\zw}%
\settowidth{\kakko@var@yokohaba}{#3}%
\settoheight{\kakko@var@tate}{#3}%
\settodepth{\kakko@var@fuka}{#3}%
\pgfmithsetlength{\kakko@var@zenkou}{\kakko@var@tate + \kakko@var@fuka}%
\pgfmithsetlength{\kakko@var@yokohaba@cal}{0.9 * \kakko@var@yokohaba}%
\pgfmithsetlength{\kakko@boxwidth@inner}{0.8 * \kakko@boxwidth@new}%
\leavevmode%
\ltjghostbeforejachar%
\hbox to \zw{\hss%
\scalebox{.63}[1]{#1}\hspace*{-.1\zw}%
\vbox to \kakko@boxwidth@inner{
\vss%
\hbox to \kakko@boxwidth@inner{%
\hss%
\rotatebox[origin=c]{\rot@kksym@tateyoko}{%
\shukushou@adj@new@no@kakko{\kakko@var@zenkou}{\kakko@boxwidth@inner}{\kakko@var@yokohaba@cal}{#3}}}%
\hss%
}%
\vss%
}%
\hspace*{-.1\zw}\scalebox{.63}[1]{#2}%
\hss}%
\ltjghostafterjachar%
}

\DeclareRobustCommand{\kakko@byouga@internal@tate}[3]{% 縦の方
\rot@or@not@kksym%
\ifnum\ltjgetparameter{direction}=3\pgfmithsetmacro{\rot@kksym@tateyoko}{\rot@kksym@tateyoko
- 90}\fi%
\setlength{\kakko@boxwidth@new}{\zw}%
\settowidth{\kakko@var@yokohaba}{#3}%
\pgfmithsetlength{\kakko@boxwidth@inner}{0.8 * \kakko@boxwidth@new}%
\leavevmode%
\ltjghostbeforejachar%
\raisebox{-.5\zw}{%
\rotatebox[origin=c]{90}{%
\hbox to \zw{\hss%
\vbox to \zw{\vss%
\hbox to \zw{\hss%
\scalebox{.63}[1]{#1}\hspace*{-.1\zw}%
\vbox to \kakko@boxwidth@inner{%
\vss%
\hbox to \kakko@boxwidth@inner{%

```



```

\hss%
\raisebox{-1.2\zw}{%
  \rotatebox[origin=c]{\rot@kksym@tateyoko}{%
    \shukushou@adj@new{\kakko@var@yokohaba}{\kakko@boxwidth@inner}{#3}%
  }%
}%
\hss%
}%
\vss%
}%
\hspace*{-.1\zw}\scalebox{.63}[1]{#2}\vspace*{.3\zw}%
\hss}%
\vss}%
\hss}%
}%
}%
\ltjghostafterjachar%
}
\DeclareRobustCommand{\kakko@byouga@internal@tate@no}[3]{% 縦の方
  \rot@or@not@kksym%
  \ifnum\ltjgetparameter{direction}=3\pgfmthsetmacro{\rot@kksym@tateyoko}{\rot@kksym@tateyoko
    - 90}\fi%
  \setlength{\kakko@boxwidth@new}{\zw}%
  \settowidth{\kakko@var@yokohaba}{#3}%
  \settoheight{\kakko@var@tate}{#3}%
  \settodepth{\kakko@var@fuka}{#3}%
  \pgfmthsetlength{\kakko@var@zenkou}{\kakko@var@tate + \kakko@var@fuka}%
  \pgfmthsetlength{\kakko@var@yokohaba@cal}{0.9 * \kakko@var@yokohaba}%
  \pgfmthsetlength{\kakko@boxwidth@inner}{0.8 * \kakko@boxwidth@new}%
  \leavevmode%
  \ltjghostbeforejachar%
  \raisebox{-.5\zw}{%
    \rotatebox[origin=c]{90}{%
      \hbox to \zw{\hss%
        \vbox to \zw{\vss%
          \hbox to \zw{\hss%
            \scalebox{.63}[1]{#1}\hspace*{-.1\zw}%
            \vbox to \kakko@boxwidth@inner{%
              \vss%
              \hbox to \kakko@boxwidth@inner{%
                \hss%
                \rotatebox[origin=c]{\rot@kksym@tateyoko}{%
                  \shukushou@adj@new@no@kakko{\kakko@var@zenkou}{\kakko@boxwidth@inner}{\kakko@var@yokohaba@cal}{#3}%
                }%
                \hss}\vss}%
            }%
          }%
        }%
      }%
    }%
  }%
}

```

```

    }%
    \hss%
  }%
  \vss%
}%
\hspace*{-.1\zw}\scalebox{.63}[1]{#2}\vspace*{.3\zw}%
\hss}%
\vss}%
\hss}%
}%
}%
\ltjghostafterjachar%
}
%%%
```

```

% \ichimoji
\newlength{\ichimoji@yk@new}
\newlength{\ichimoji@ht@new}
\newlength{\ichimoji@dp@new}
\newlength{\ichimoji@zenkou@new}
\DeclareRobustCommand{\ichimoji@scaling}[1]{%
  \ifdim\ichimoji@yk@new > \zw%
    \pgfmathsetmacro{\ratio@ichimoji@yk}{\strip@pt\zw/\strip@pt\ichimoji@yk@new}%
    \scalebox{\ratio@ichimoji@yk}[1]{#1}%
  \else%
    #1%
  \fi%
}
\DeclareRobustCommand{\ichimoji@new}[1]{%
  \ifnum\ltjgetparameter{direction}=3%
    \leavevmode%
    \ltjghostbeforejachar%
    \raisebox{-.5\zw}{\hbox to \zw {\hss%
      \vbox to \zw {\vss%
        \hbox to \zw {\hss%
          \resizebox*{\zw}{\zw}{#1}%
        \hss}%
      \vss}\hss}}%
    \ltjghostafterjachar%
  \else%
    \leavevmode%
    \ltjghostbeforejachar%
    \raisebox{-.12\zw}{\hbox to \zw {\hss%
      \vbox to \zw {\vss%
        \hbox to \zw {\hss%
          \resizebox*{\zw}{\zw}{#1}%
        \hss}%
      \vss}\hss}}%
    \ltjghostafterjachar%
  \end{ifnum}
}
```

```

\fi%
}
\DeclareRobustCommand{\ichimoji@new@no}[1]{%
\settowidth{\ichimoji@yk@new}{#1}%
\settoheight{\ichimoji@ht@new}{#1}%
\settodepth{\ichimoji@dp@new}{#1}%
\pgfmathsetlength{\ichimoji@zenkou@new}{\ichimoji@ht@new + \ichimoji@dp@new}%
\ifnum\ltjgetparameter{direction}=3%
\leavevmode%
\ltjghostbeforejachar%
\raisebox{-.5\zw}{\hbox to \zw {\hss%
\vbox to \zw {\vss%
\hbox to \zw {\hss%
\ichimoji@scaling{#1}%
\hss}%
\vss}\hss}}%
\ltjghostafterjachar%
}else%
\leavevmode%
\ltjghostbeforejachar%
\raisebox{-.12\zw}{\hbox to \zw {\hss%
\vbox to \zw {\vss%
\hbox to \zw {\hss%
\ichimoji@scaling{#1}%
\hss}%
\vss}\hss}}%
\ltjghostafterjachar%
\fi%
}
%%
\endinput

```